
LWFA-120 Serise



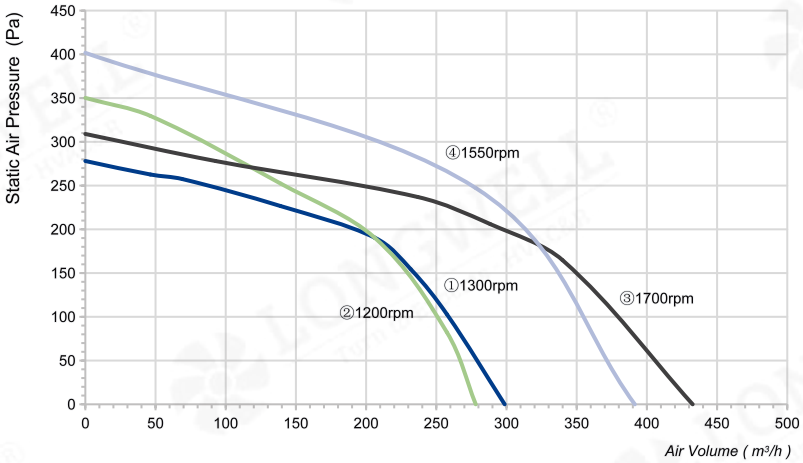


Product Characteristic

- Material : Metal
- Insulation Class: F
- Bearing: Maintenance-free ball bearings
- Mode of Operation: S1
- Type of Protection: IP54
- Operation Temperature: -30℃～+60℃


CE RoHS BSCI ISO EAC UL LVD

Technical Specifications

Model	Voltage (V)	Frequency (Hz)	Power (W)	Current (A)	Speed (RPM)	Air Flow (m³/h)	Air Pressure (Pa)	Noise [dB(A)]	Capacitor	Curve
LWFA2E120-092DS-01	230	50	65	0.3	1300	299	278	54	2uF	①
LWFA2E120-092DS-02	230	60	71	0.33	1200	278	350	54	2uF	②
LWFA2E120-092DS-03	230	50	105	0.47	1700	433	309	60	2uF	③
LWFA2E120-092DS-04	230	60	116	0.52	1550	391	402	60	2uF	④

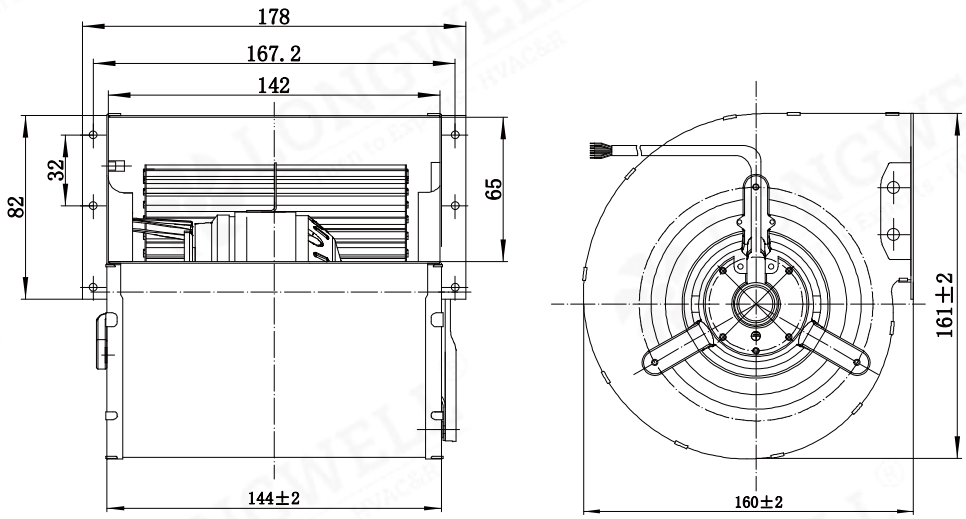

LWFA-120 Serise

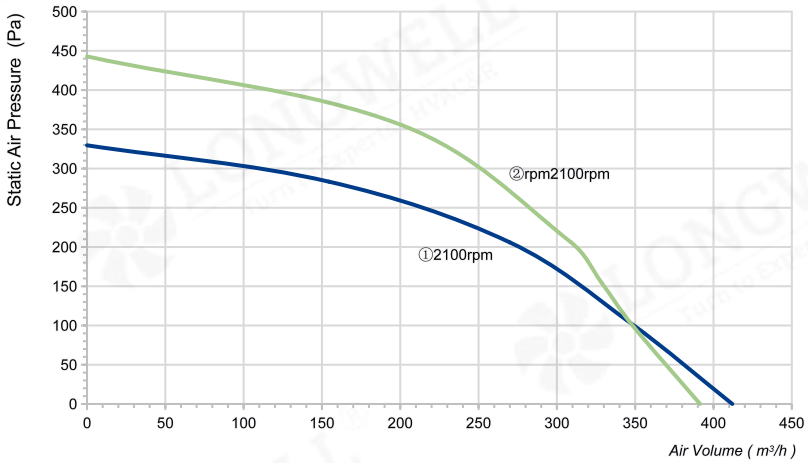



Product Characteristic

- Material : Metal
- Insulation Class: F
- Bearing: Maintenance-free ball bearings
- Mode of Operation: S1
- Type of Protection: IP54
- Operation Temperature: -30℃～+60℃

Technical Specifications

Model	Voltage (V)	Frequency (Hz)	Power (W)	Current (A)	Speed (RPM)	Air Flow (m³/h)	Air Pressure (Pa)	Noise [dB(A)]	Capacitor	Curve
LWFA2E120-092DS-05	230	50	85	0.4	2100	412	330	66	1.5uF	①
LWFA2E120-092DS-06	230	60	95	0.43	2100	391	443	66	1.5uF	②

