
LWFA-120 Serise



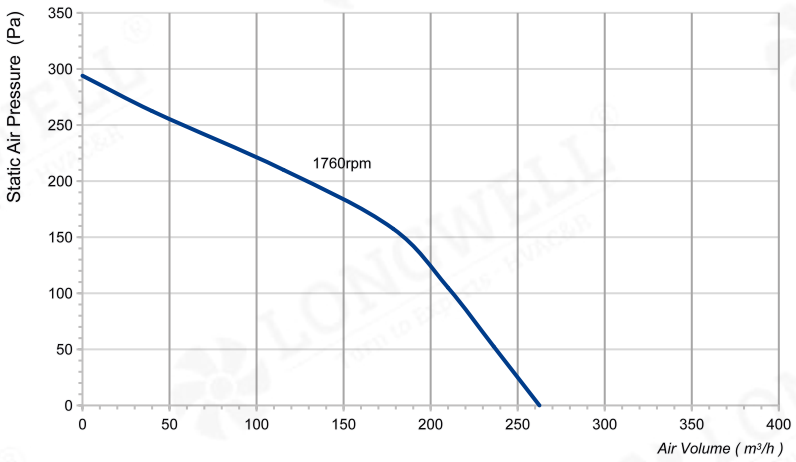


Product Characteristic


- Material: Galvanised sheet steel
- Bearing: Maintenance-free ball bearings
- Mode of Operation: S1
- Type of Protection: IP54
- Insulation Class: F
- Operation Temperature: -30℃～+60℃

CE RoHS BSCI ISO EAC UL LVD


Technical Specifications

Model	Voltage (V)	Frequency (Hz)	Power (W)	Current (A)	Speed (RPM)	Air Flow (m³/h)	Air Pressure (Pa)	Noise [dB(A)]	Capacitor	Curve
LWFA4E120-092SS-01	230	50	54	0.24	1760	263	294	59	2uF	/

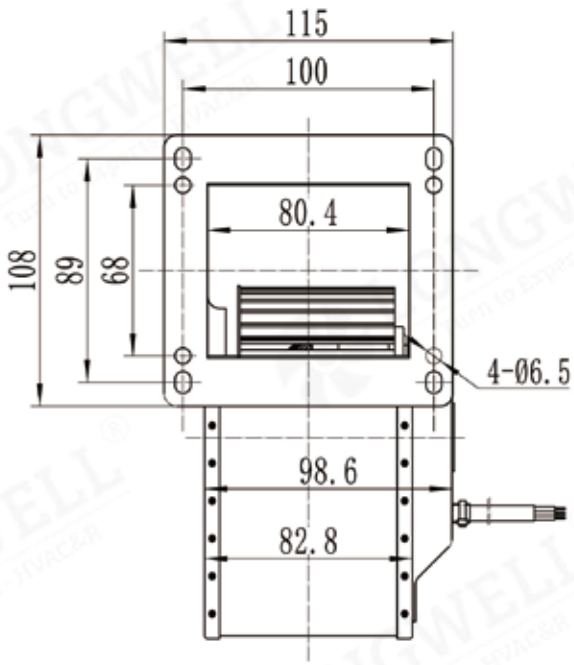

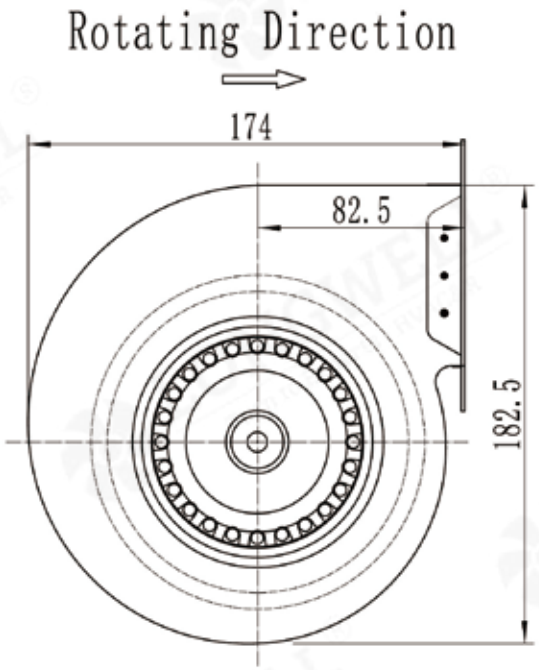

LWFA-120 Serise

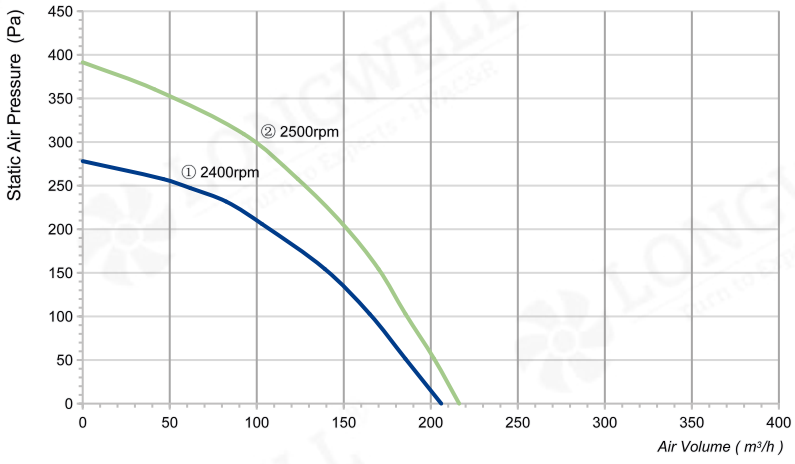



Product Characteristic

- Material: Galvanised sheet steel
- Bearing: Maintenance-free ball bearings
- Mode of Operation: S1
- Type of Protection: IP54
- Insulation Class: F
- Operation Temperature: -30℃～+60℃

Technical Specifications

Model	Voltage (V)	Frequency (Hz)	Power (W)	Current (A)	Speed (RPM)	Air Flow (m³/h)	Air Pressure (Pa)	Noise [dB(A)]	Capacitor	Curve
LWFA2E120-092SS-02	230	50	58	0.27	2400	206	278	51	1.5uF	①
LWFA2E120-092SS-03	230	60	73	0.33	2500	216	391	53	1.5uF	②

