
LWFA-133 Serise



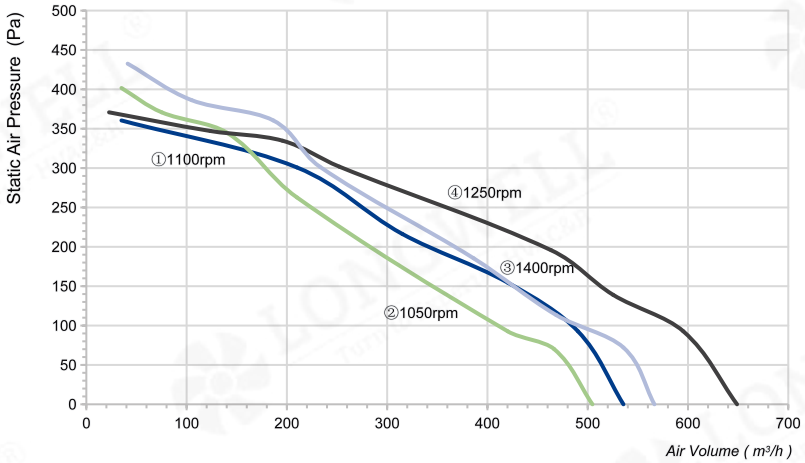



Product Characteristic

- Material : Metal
- Insulation Class: F
- Bearing: Maintenance-free ball bearings
- Mode of Operation: S1
- Type of Protection: IP54
- Operation Temperature: -30℃～+60℃


Technical Specifications

Model	Voltage (V)	Frequency (Hz)	Power (W)	Current (A)	Speed (RPM)	Air Flow (m³/h)	Air Pressure (Pa)	Noise [dB(A)]	Capacitor	Curve
LWFA2E133-092DS-01	230	50	130	0.6	1100	536	361	60	3uF	①
LWFA2E133-092DS-02	230	60	135	0.62	1050	505	402	60	3uF	②
LWFA4E133-092DS-03	230	50	180	0.8	1400	649	371	69	4uF	③
LWFA4E133-092DS-04	230	60	190	0.86	1250	567	433	69	4uF	④

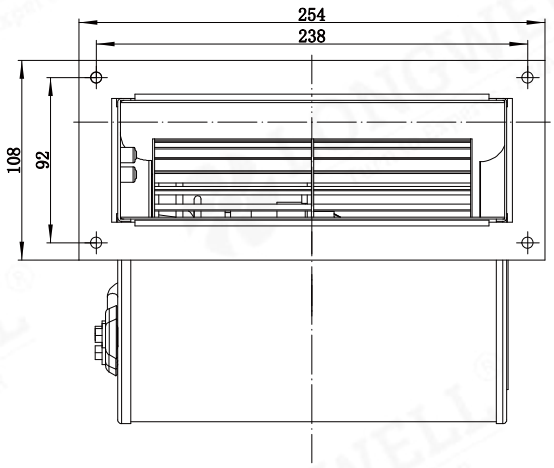

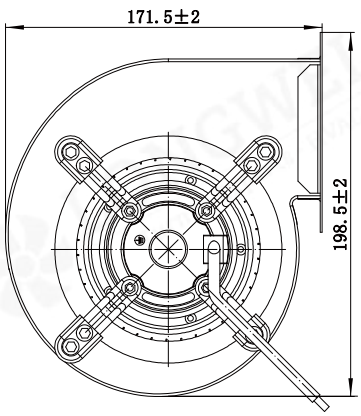

LWFA-133 Serise

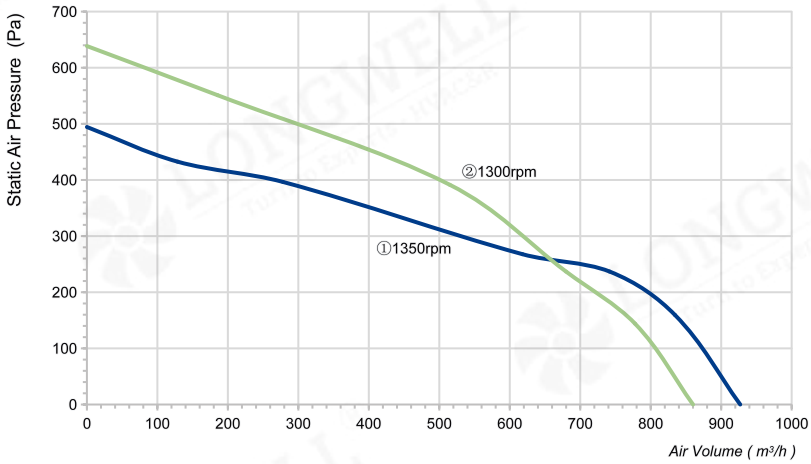





Product Characteristic

- Material : Metal
- Insulation Class: F
- Bearing: Maintenance-free ball bearings
- Mode of Operation: S1
- Type of Protection: IP54
- Operation Temperature: -30℃～+60℃


Technical Specifications

Model	Voltage (V)	Frequency (Hz)	Power (W)	Current (A)	Speed (RPM)	Air Flow (m³/h)	Air Pressure (Pa)	Noise [dB(A)]	Capacitor	Curve
LWFA2E133-092DS-05	230	50	250	1.15	1350	927	494	69	6uF	①
LWFA2E133-092DS-06	230	60	265	1.22	1300	886	639	69	6uF	②

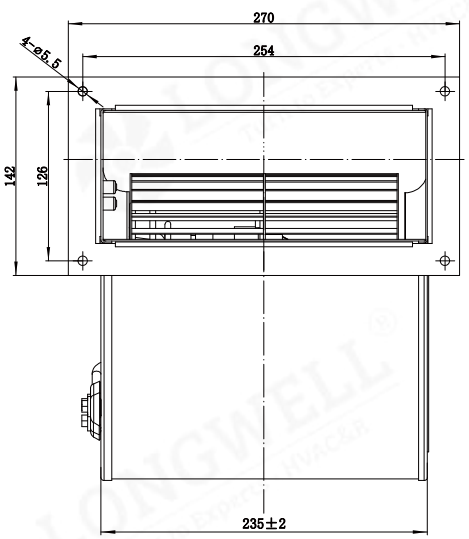

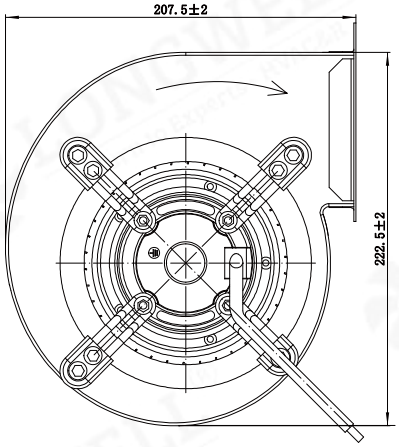

LWFA-133 Serise

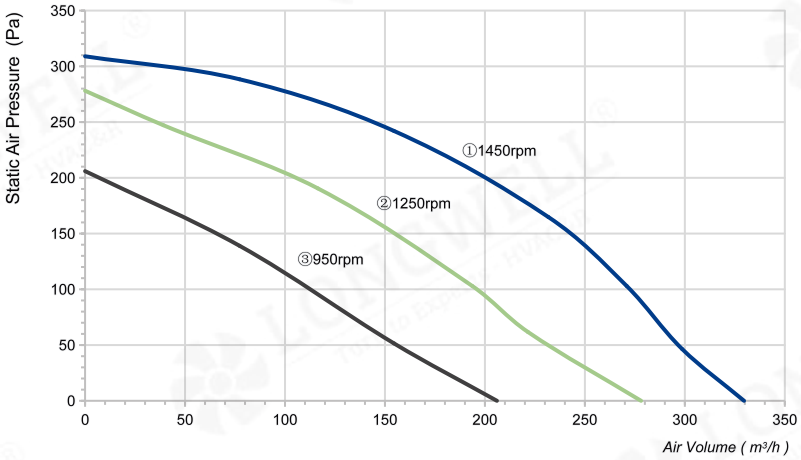




Product Characteristic


- Material : Metal
- Insulation Class: F
- Bearing: Maintenance-free ball bearings
- Mode of Operation: S1
- Type of Protection: IP54
- Operation Temperature: -30℃～+60℃

Technical Specifications

Model	Voltage (V)	Frequency (Hz)	Power (W)	Current (A)	Speed (RPM)	Air Flow (m³/h)	Air Pressure (Pa)	Noise [dB(A)]	Capacitor	Curve
LWFA2E133-092DS-07	230	50	70	0.3	1450	330	309	40	1.5uF	①
			60	0.26	1250	278	278	35	1.5uF	②
			47	0.22	950	206	206	29	1.5uF	③

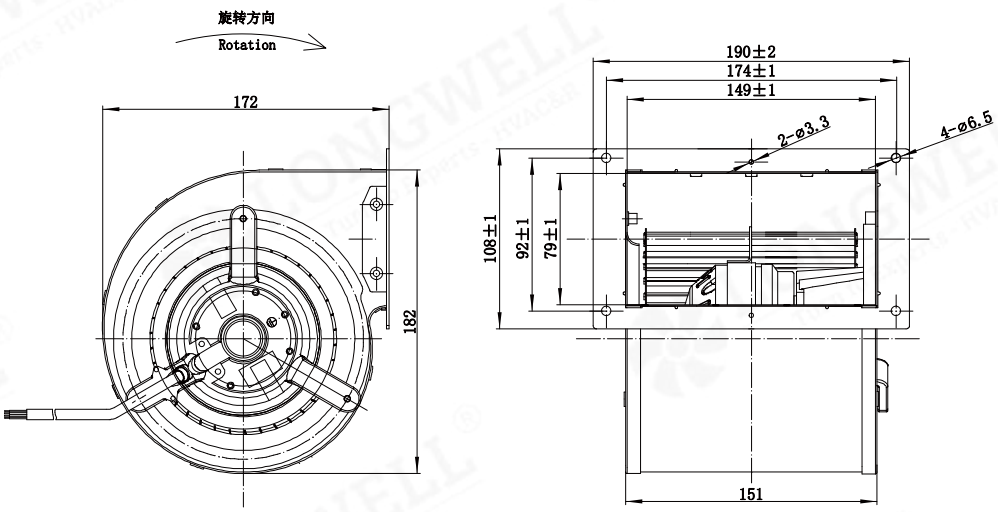

LWFA-133 Serise

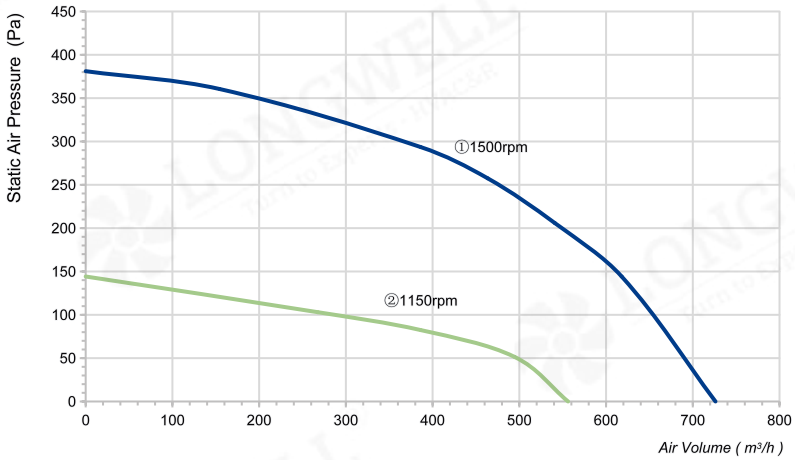




Product Characteristic


- Material : Metal
- Insulation Class: F
- Bearing: Maintenance-free ball bearings
- Mode of Operation: S1
- Type of Protection: IP54
- Operation Temperature: -30℃～+60℃

Technical Specifications

Model	Voltage (V)	Frequency (Hz)	Power (W)	Current (A)	Speed (RPM)	Air Flow (m³/h)	Air Pressure (Pa)	Noise [dB(A)]	Capacitor	Curve
LWFA2E133-092DS-08	230	50	190	0.85	1500	726	381	60	4uF	①
LWFA4E133-092DS-09	230	50	75	0.35	1150	556	144	51	2uF	②

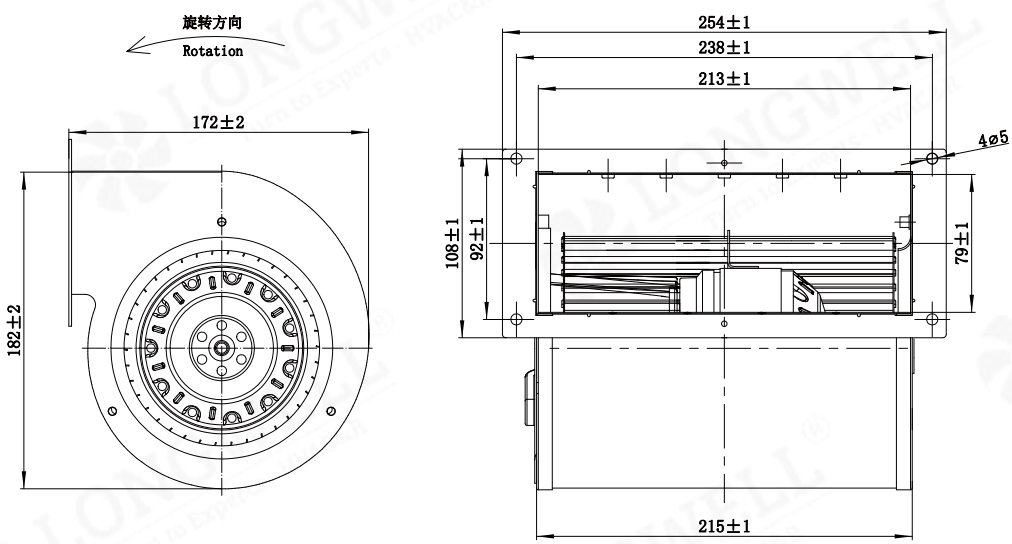

LWFA-133 Serise

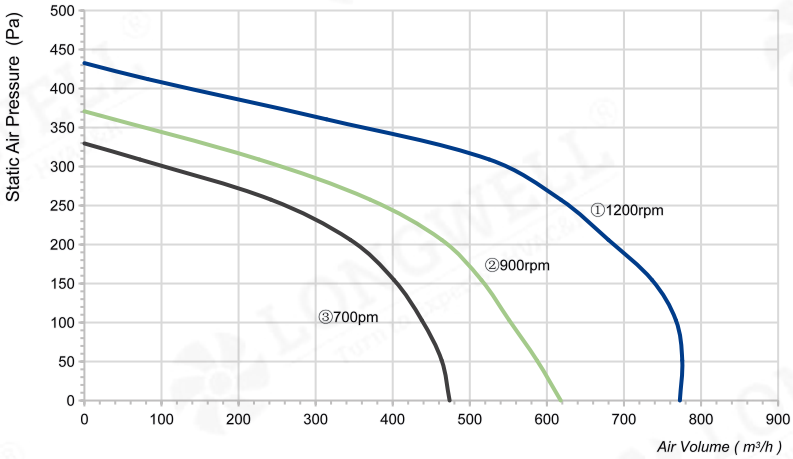



Product Characteristic

- Material : Metal
- Insulation Class: F
- Bearing: Maintenance-free ball bearings
- Mode of Operation: S1
- Type of Protection: IP54
- Operation Temperature: -30℃～+60℃

Technical Specifications

Model	Voltage (V)	Frequency (Hz)	Power (W)	Current (A)	Speed (RPM)	Air Flow (m³/h)	Air Pressure (Pa)	Noise [dB(A)]	Capacitor	Curve
LWFA2E133-092DS-10	230	50	250	1.1	1200	773	433	58	4uF	①
			205	0.9	900	618	371	51	4uF	②
			175	0.8	700	474	330	46	4uF	③

