
LWFA-133 Serise



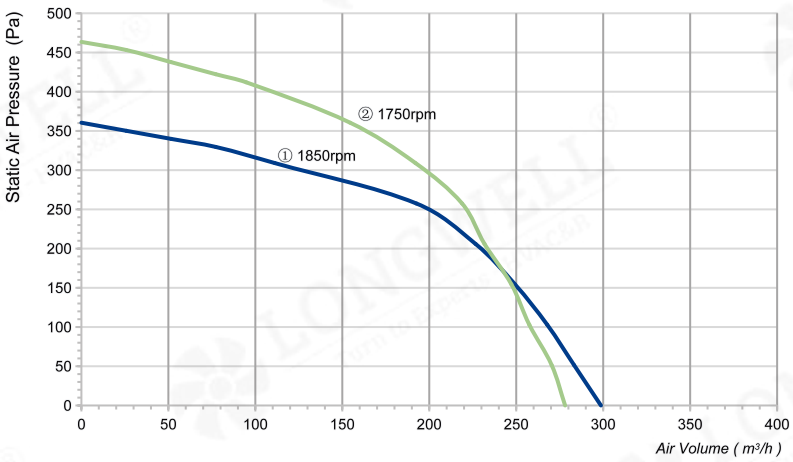


Product Characteristic


- Material: Galvanised sheet steel
- Bearing: Maintenance-free ball bearings
- Mode of Operation: S1
- Type of Protection: IP54
- Insulation Class: F
- Operation Temperature: -30℃～+60℃

CE RoHS BSCI ISO EAC UL LVD


Technical Specifications

Model	Voltage (V)	Frequency (Hz)	Power (W)	Current (A)	Speed (RPM)	Air Flow (m³/h)	Air Pressure (Pa)	Noise [dB(A)]	Capacitor	Curve
LWFA2E133-092SS-01	230	50	83	0.37	1850	299	361	61	2uF	①
LWFA2E133-092SS-02	230	60	95	0.43	1750	278	464	63	2uF	②

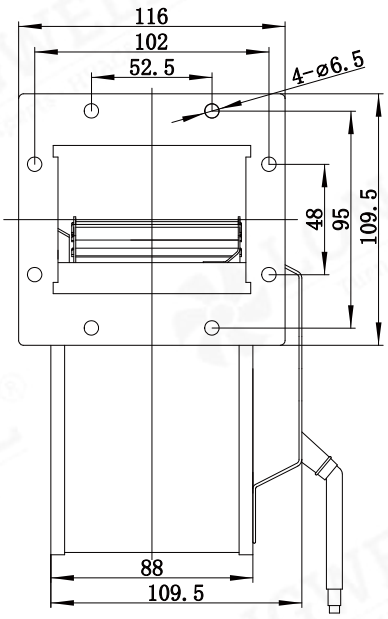

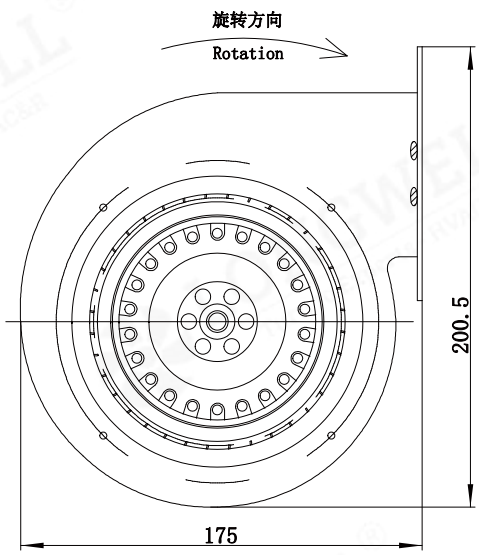

LWFA-133 Serise

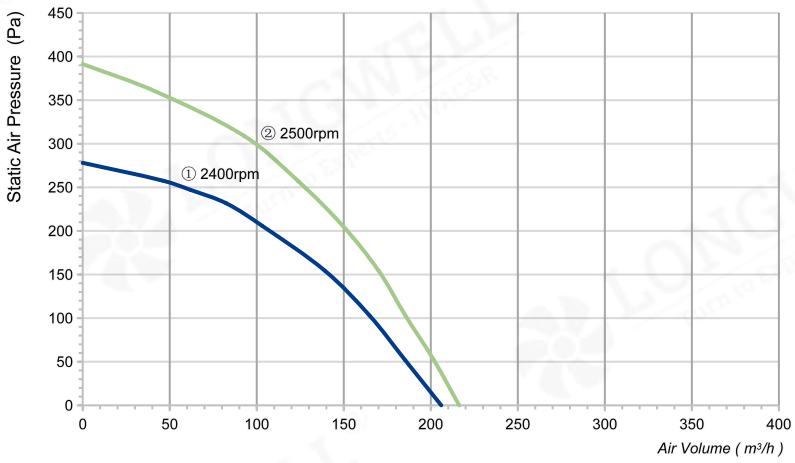



Product Characteristic

- Material: Plastic PA66
- Bearing: Maintenance-free ball bearings
- Mode of Operation: S1
- Type of Protection: IP54
- Insulation Class: F
- Operation Temperature: -30℃～+60℃

Technical Specifications

Model	Voltage (V)	Frequency (Hz)	Power (W)	Current (A)	Speed (RPM)	Air Flow (m³/h)	Air Pressure (Pa)	Noise [dB(A)]	Capacitor	Curve
LWFA2E133-092SS-03	230	50	85	0.38	1600	319	433	56	2uF	①
			60	0.28	1100	206	350	47	2uF	②
			50	0.25	800	146	288	40	2uF	③

