
LWBA-175 Series



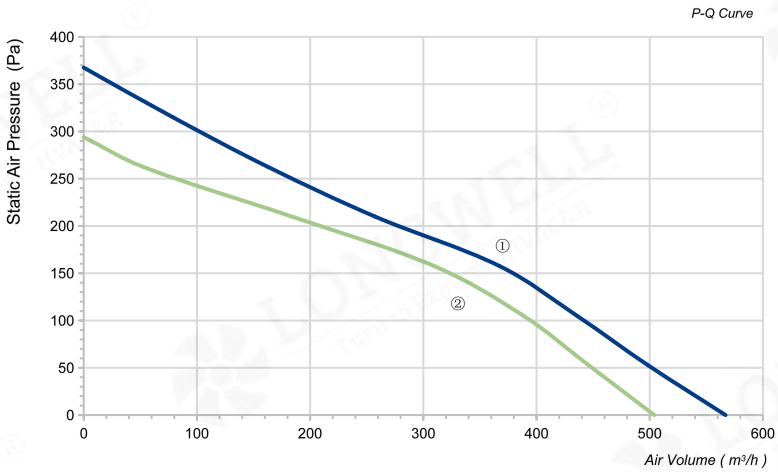



Product Characteristic

- Impeller Material: Plastic PA66
- Direction of Rotation: Clockwise,seen on rotor
- Mode of Operation: S1
- Operation Temperature: -40℃～+65℃
- Type of Protection: IP44
- Insulation Class: F
- Bearing: Maintenance-free ball bearings


Technical Specifications

Model	Voltage (V)	Frequency (Hz)	Power (W)	Current (A)	Speed (RPM)	Air Flow (m³/h)	Air Pressure (Pa)	Noise [dB(A)]	Capacitor	Curve
LWBA2E175-072NU-01	115	60	46.1	0.42	3060	567	368	61.1	6uF	①
LWBA2E175-072NS-02	230	50	35.5	0.15	2770	504	294	60.8	5uF	②

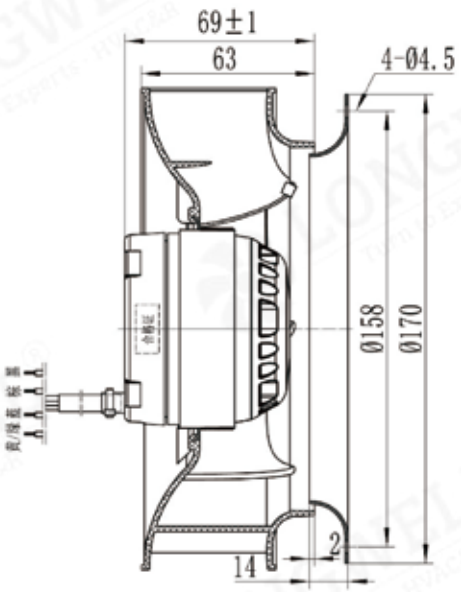

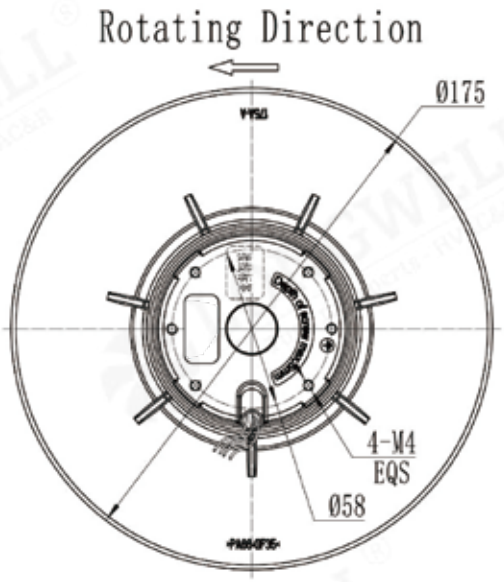

LWBA-175 Series

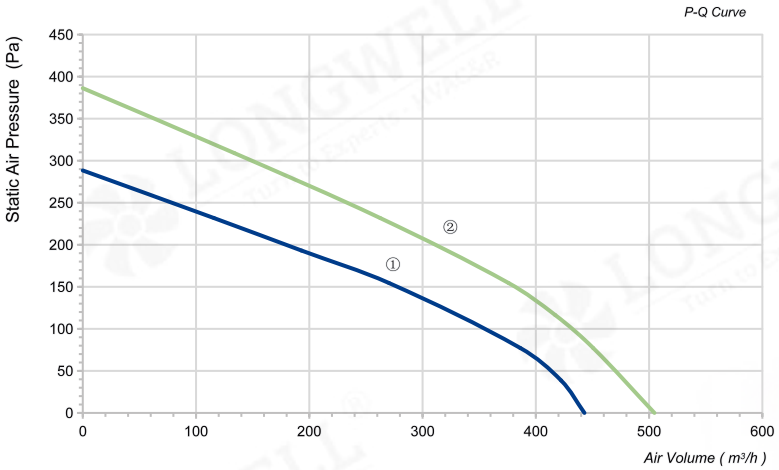





Product Characteristic

- Impeller Material: Plastic PA66
- Direction of Rotation: Clockwise,seen on rotor
- Mode of Operation: S1
- Operation Temperature: -40℃～+65℃
- Type of Protection: IP44
- Insulation Class: F
- Bearing: Maintenance-free ball bearings


Technical Specifications

Model	Voltage (V)	Frequency (Hz)	Power (W)	Current (A)	Speed (RPM)	Air Flow (m³/h)	Air Pressure (Pa)	Noise [dB(A)]	Capacitor	Curve
LWBA2E175-092NS-03	230	50	52	0.24	2500	443	288	64	1.5uF	①
LWBA2E175-092NS-04	230	60	66	0.32	2700	505	386	66	1.5uF	②

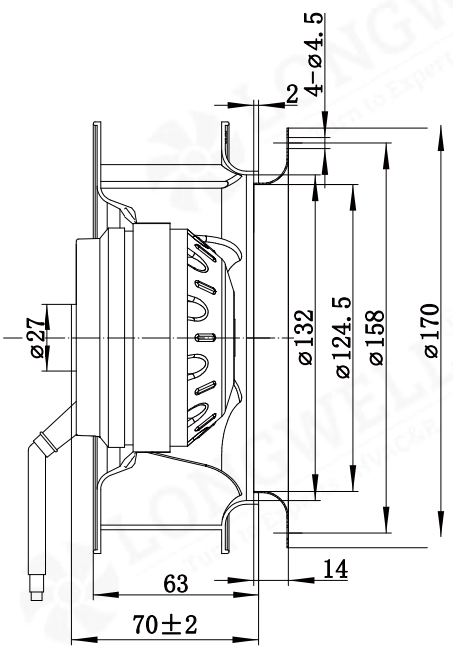

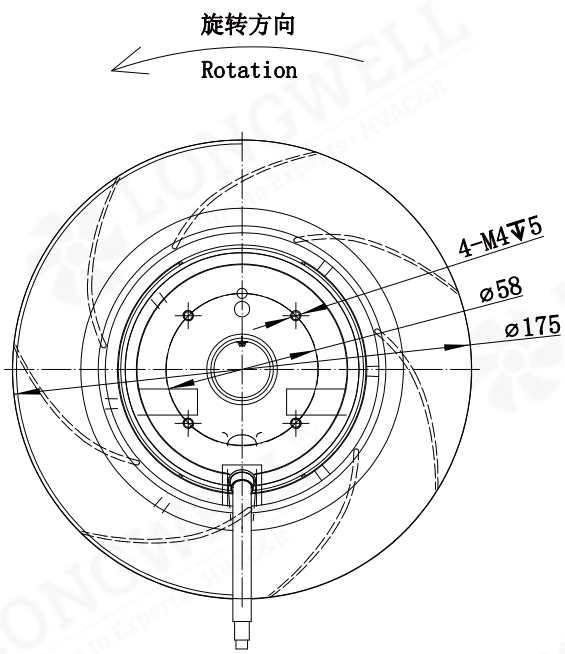

LWBA-175 Series

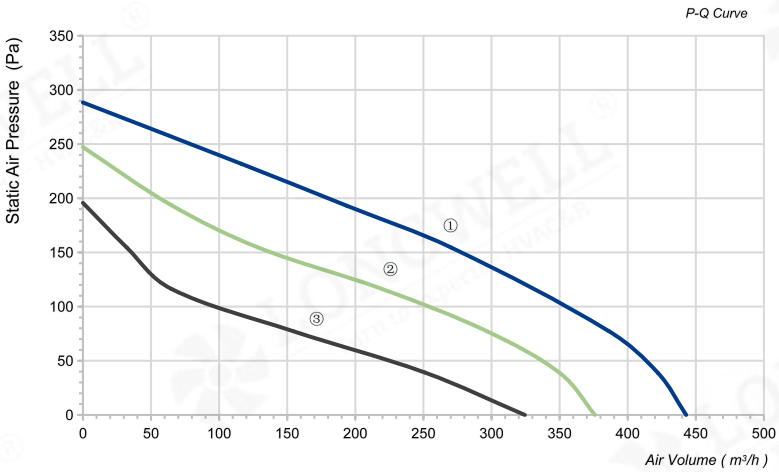



Product Characteristic

- Impeller Material: Plastic PA66
- Direction of Rotation: Clockwise,seen on rotor
- Mode of Operation: S1
- Operation Temperature: -40℃～+65℃
- Type of Protection: IP44
- Insulation Class: F
- Bearing: Maintenance-free ball bearings

Technical Specifications

Model	Voltage (V)	Frequency (Hz)	Power (W)	Current (A)	Speed (RPM)	Air Flow (m³/h)	Air Pressure (Pa)	Noise [dB(A)]	Capacitor	Curve
LWBA2E175-092NS-05	230	50	52	0.25	2530	443	288	64	1.5uF	①
			45	0.2	2150	376	247	60	1.5uF	②
			42	0.18	1850	324	196	55	1.5uF	③

