
LWFA-180 Serise



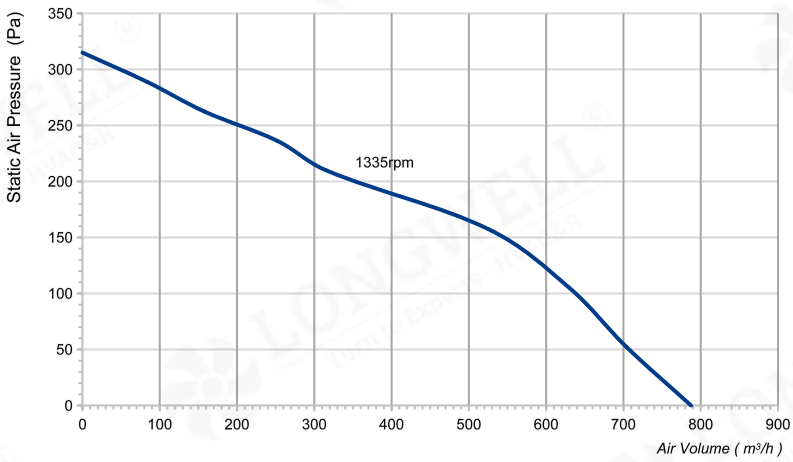


Product Characteristic


• Material:	Galvanised sheet steel	• Type of Protection:	IP54
• Bearing:	Maintenance-free ball bearings	• Insulation Class:	F
• Mode of Operation:	S1	• Operation Temperature:	-30℃～+60℃

CE RoHS ETL BSCI ISO EAC UL LVD


Technical Specifications

Model	Voltage (V)	Frequency (Hz)	Power (W)	Current (A)	Speed (RPM)	Air Flow (m³/h)	Air Pressure (Pa)	Noise [dB(A)]	Capacitor	Curve
LWFA4E180-092SS-01	230	50	137	0.59	1335	788	315	63	5uF	/

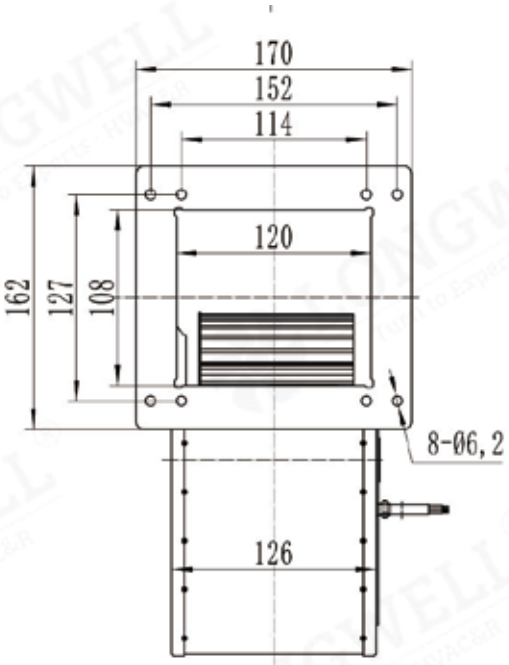

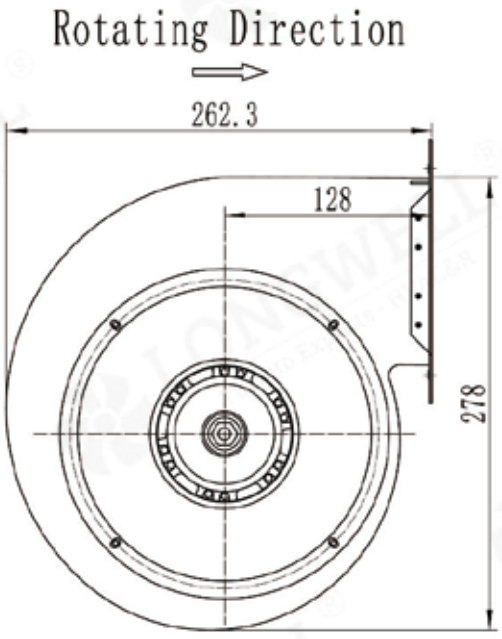

LWFA-180 Serise

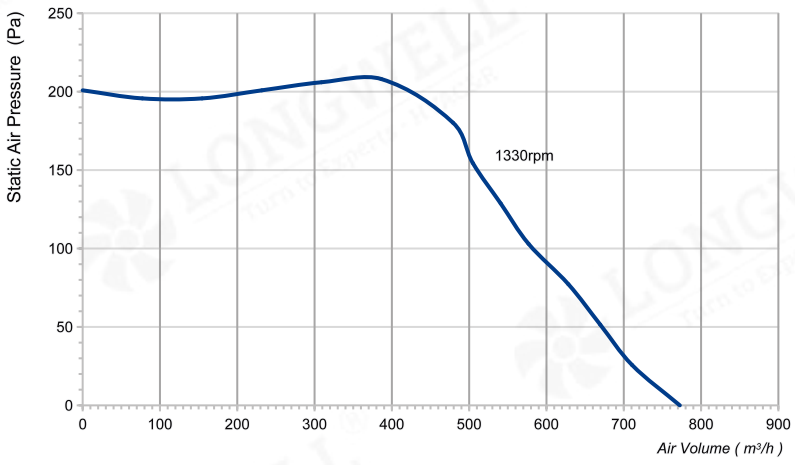





Product Characteristic

- Material: Galvanised sheet steel
- Bearing: Maintenance-free ball bearings
- Mode of Operation: S1
- Type of Protection: IP54
- Insulation Class: F
- Operation Temperature: -30℃～+60℃


Technical Specifications

Model	Voltage (V)	Frequency (Hz)	Power (W)	Current (A)	Speed (RPM)	Air Flow (m³/h)	Air Pressure (Pa)	Noise [dB(A)]	Capacitor	Curve
LWFA4E180-092SS-02	230	50	135	0.7	1330	773	201	63	3uF	/

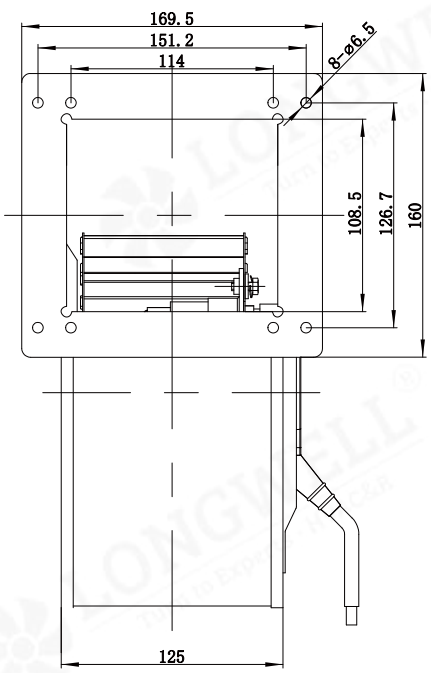

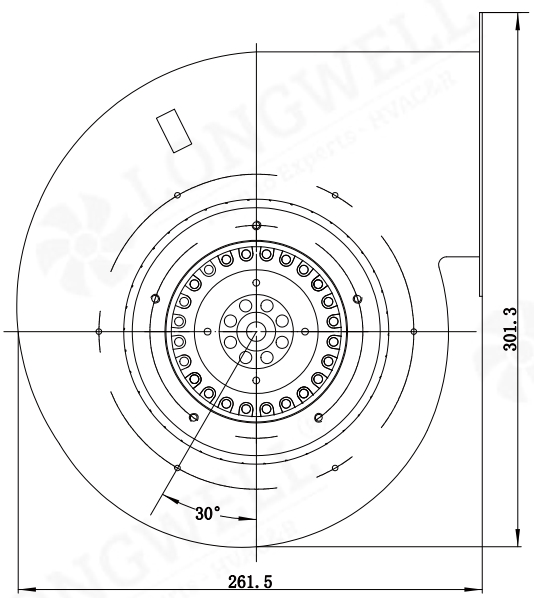

LWFA-180 Serise

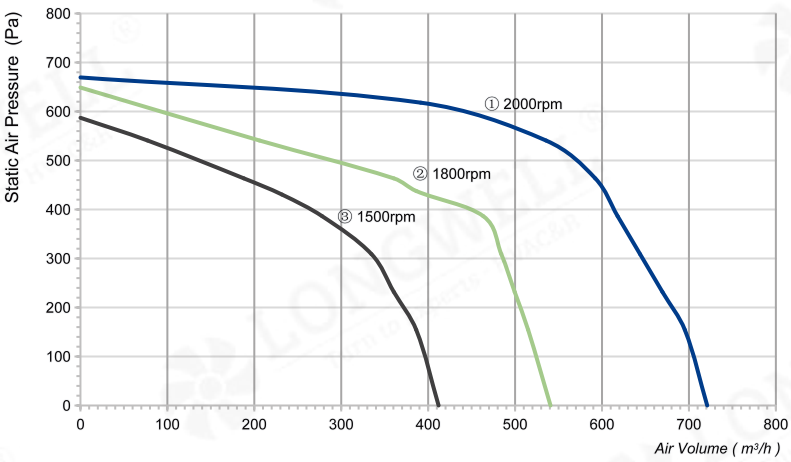



Product Characteristic

- Material: Galvanised sheet steel
- Bearing: Maintenance-free ball bearings
- Mode of Operation: S1
- Type of Protection: IP54
- Insulation Class: F
- Operation Temperature: -30℃～+60℃

Technical Specifications

Model	Voltage (V)	Frequency (Hz)	Power (W)	Current (A)	Speed (RPM)	Air Flow (m³/h)	Air Pressure (Pa)	Noise [dB(A)]	Capacitor	Curve
LWFA2E180-092SS-03	230	50	300	1.35	2000	742	670	73	7uF	①
			250	1.2	1800	541	649	69	7uF	②
			195	0.95	1500	412	587	65	7uF	③

