
LWBA-225 Series



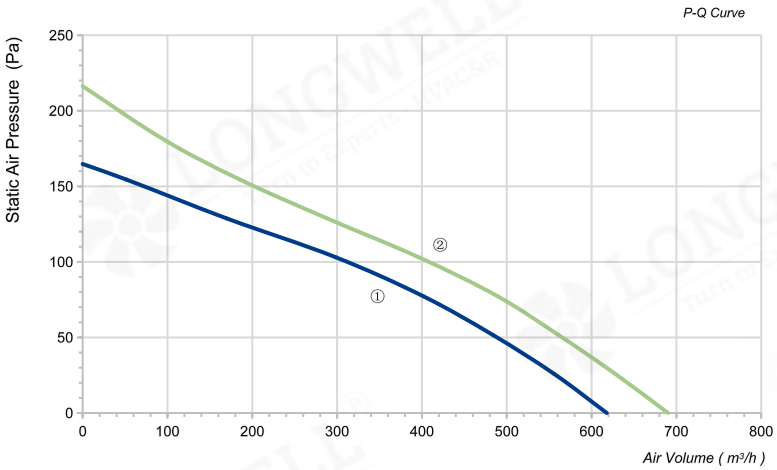



Product Characteristic

- Impeller Material: Plastic PA66
- Direction of Rotation: Clockwise,seen on rotor
- Mode of Operation: S1
- Operation Temperature: -40℃～+65℃
- Type of Protection: IP44
- Insulation Class: F
- Bearing: Maintenance-free ball bearings


Technical Specifications

Model	Voltage (V)	Frequency (Hz)	Power (W)	Current (A)	Speed (RPM)	Air Flow (m³/h)	Air Pressure (Pa)	Noise [dB(A)]	Capacitor	Curve
LWBA2E225-092NS-01	230	50	45	0.21	1420	618	165	54	1.5uF	①
LWBA4E225-092NS-02	230	60	47	0.2	1650	690	216	60	1.5uF	②
LWBA2D225-092NT-03	380	50	45	0.13	1420	618	165	54	/	①
LWBA4D225-092NT-04	380	60	47	0.13	1650	690	216	60	/	②

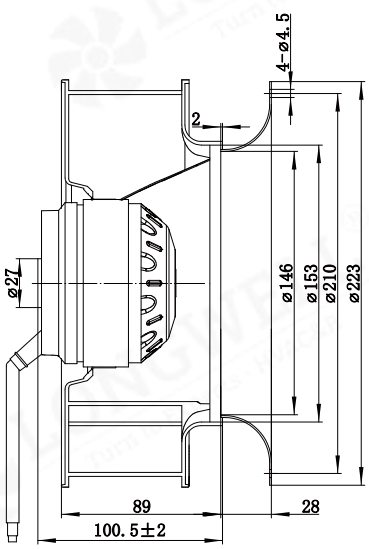

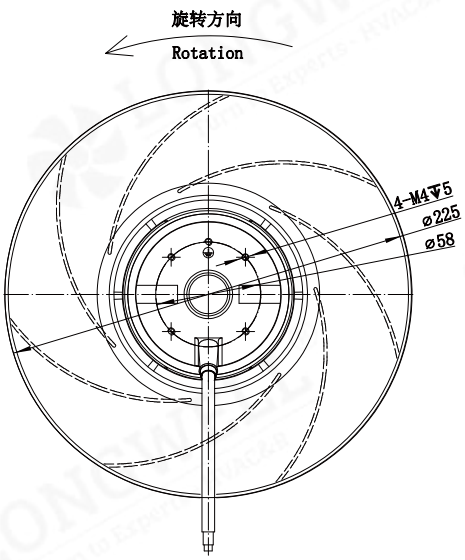

LWBA-225 Series

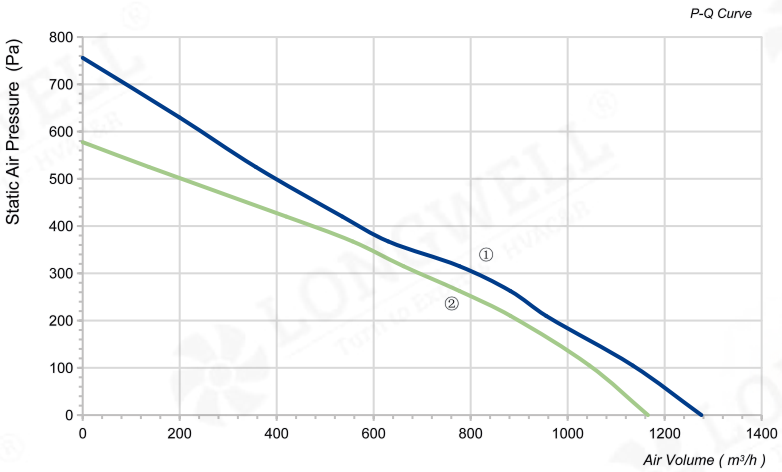





Product Characteristic

- Impeller Material: Plastic PA66
- Direction of Rotation: Clockwise,seen on rotor
- Mode of Operation: S1
- Operation Temperature: -40℃～+65℃
- Type of Protection: IP44
- Insulation Class: F
- Bearing: Maintenance-free ball bearings


Technical Specifications

Model	Voltage (V)	Frequency (Hz)	Power (W)	Current (A)	Speed (RPM)	Air Flow (m³/h)	Air Pressure (Pa)	Noise [dB(A)]	Capacitor	Curve
LWBA2E225-092NU-05	115	60	178	0.77	2905	1276	756	71.3	20uF	①
LWBA2E225-092NS-06	230	50	129	0.56	2655	1166	578	68.6	5uF	②

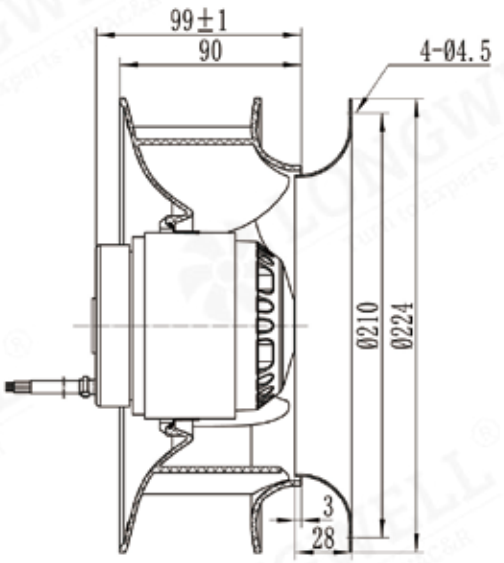

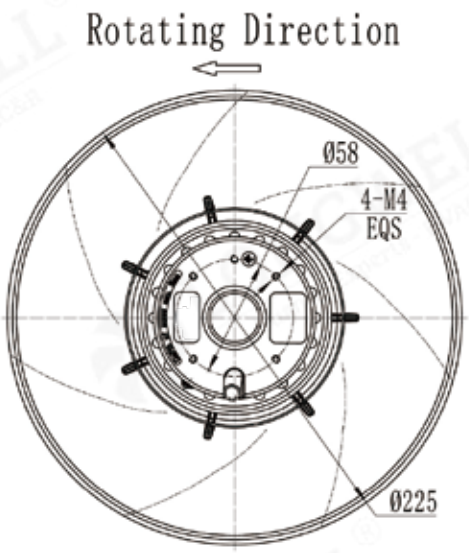

LWBA-225 Series

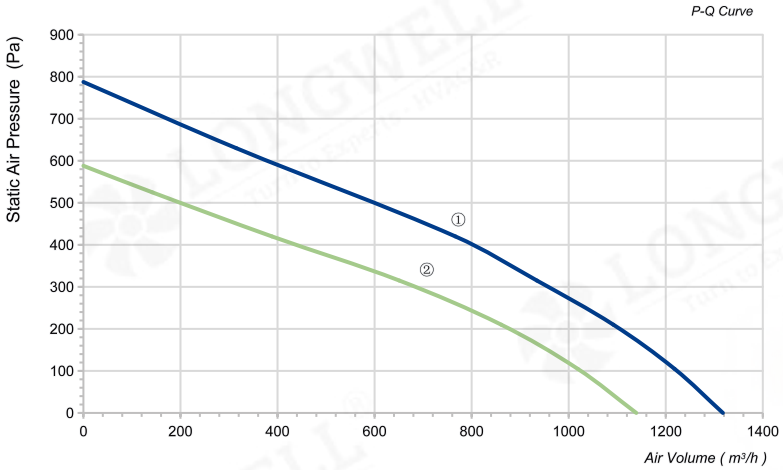





Product Characteristic

- Impeller Material: Plastic PA66
- Direction of Rotation: Clockwise,seen on rotor
- Mode of Operation: S1
- Operation Temperature: -40℃～+65℃
- Type of Protection: IP44
- Insulation Class: F
- Bearing: Maintenance-free ball bearings


Technical Specifications

Model	Voltage (V)	Frequency (Hz)	Power (W)	Current (A)	Speed (RPM)	Air Flow (m³/h)	Air Pressure (Pa)	Noise [dB(A)]	Capacitor	Curve
LWBA2D225-092NT-07	460	60	190	0.3	3095	1318	788	71.8	/	①
LWBA2D225-092NT-08	380	50	119	0.23	2645	1139	588	68.6	/	②

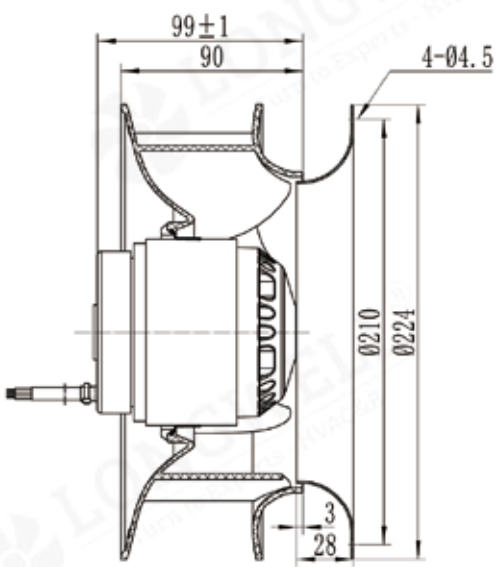

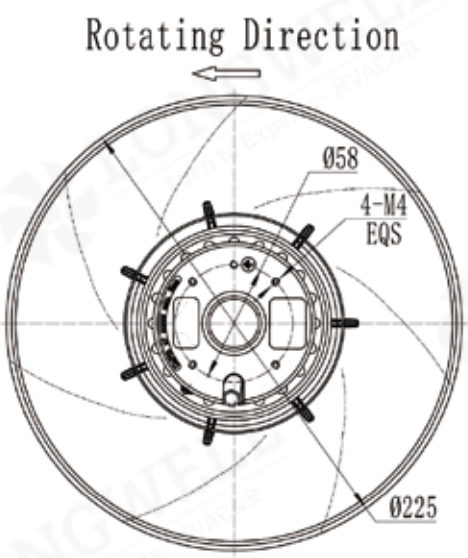

LWBA-225 Series

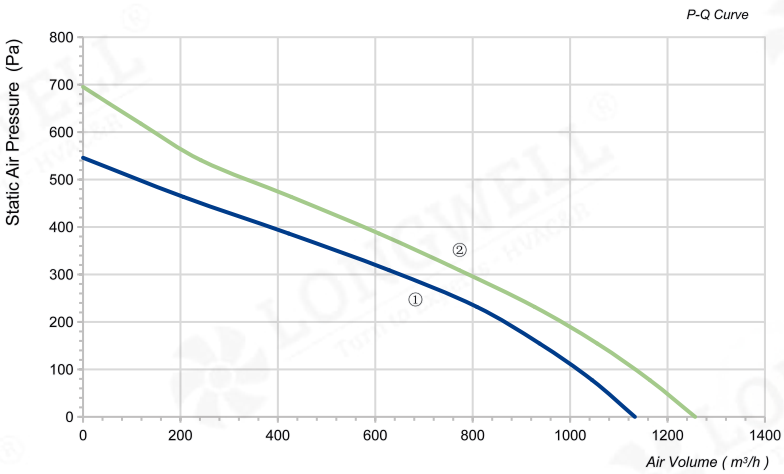




Product Characteristic


- Impeller Material: Plastic PA66
- Direction of Rotation: Clockwise,seen on rotor
- Mode of Operation: S1
- Operation Temperature: -40℃～+65℃
- Type of Protection: IP44
- Insulation Class: F
- Bearing: Maintenance-free ball bearings

Technical Specifications

Model	Voltage (V)	Frequency (Hz)	Power (W)	Current (A)	Speed (RPM)	Air Flow (m³/h)	Air Pressure (Pa)	Noise [dB(A)]	Capacitor	Curve
LWBA2E225-092NS-09	230	50	135	0.6	2600	1133	546	74	4uF	①
LWBA2E225-092NS-10	230	60	180	0.9	2900	1257	695	76	4uF	②
LWBA2D225-092NT-11	380	50	135	0.23	2600	1133	546	74	/	①
LWBA2D225-092NT-12	380	60	180	0.28	2900	1257	695	76	/	②

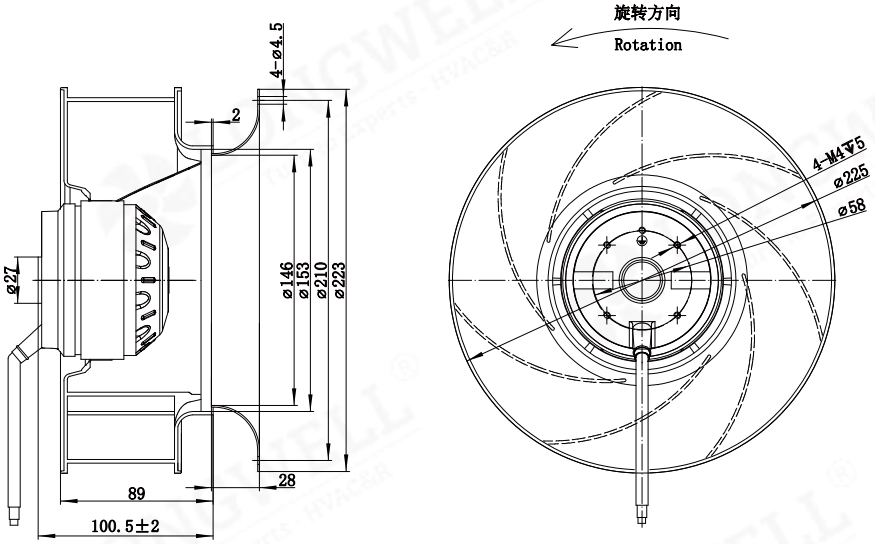

LWBA-225 Series

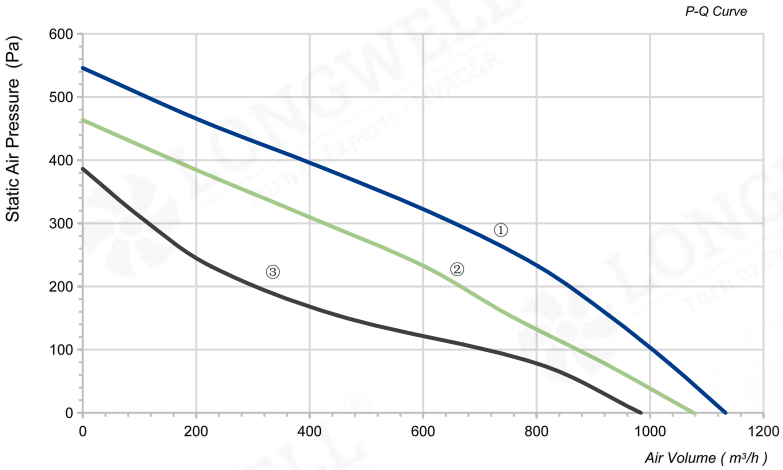



Product Characteristic

- Impeller Material: Plastic PA66
- Direction of Rotation: Clockwise,seen on rotor
- Mode of Operation: S1
- Operation Temperature: -40℃～+65℃
- Type of Protection: IP44
- Insulation Class: F
- Bearing: Maintenance-free ball bearings

Technical Specifications

Model	Voltage (V)	Frequency (Hz)	Power (W)	Current (A)	Speed (RPM)	Air Flow (m³/h)	Air Pressure (Pa)	Noise [dB(A)]	Capacitor	Curve
LWBA2E225-092NS-13	230	50	125	0.6	2630	1133	546	74	4uF	①
			120	0.54	2500	1076	464	70	4uF	②
			115	0.52	2290	984	386	66	4uF	③

