
LWBA-250 Series



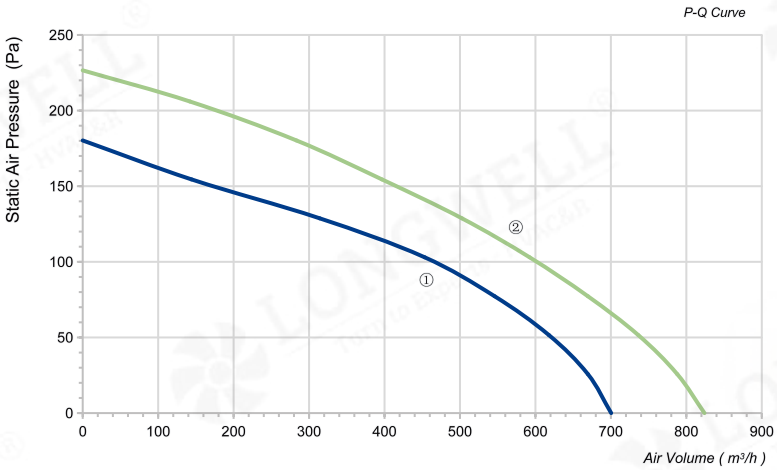



Product Characteristic

- Impeller Material: Plastic PA66
- Direction of Rotation: Clockwise,seen on rotor
- Mode of Operation: S1
- Operation Temperature: -40℃～+65℃
- Type of Protection: IP44
- Insulation Class: F
- Bearing: Maintenance-free ball bearings


Technical Specifications

Model	Voltage (V)	Frequency (Hz)	Power (W)	Current (A)	Speed (RPM)	Air Flow (m³/h)	Air Pressure (Pa)	Noise [dB(A)]	Capacitor	Curve
LWBA4E250-092NS-01	230	50	53	0.28	1400	700	180	61	2uF	①
LWBA4E250-092NS-02	230	60	58	0.28	1600	824	227	64	2uF	②
LWBA4D250-092NT-03	380	50	53	0.15	1400	700	180	61	/	①
LWBA4D250-092NT-04	380	60	58	0.16	1600	824	227	64	/	②

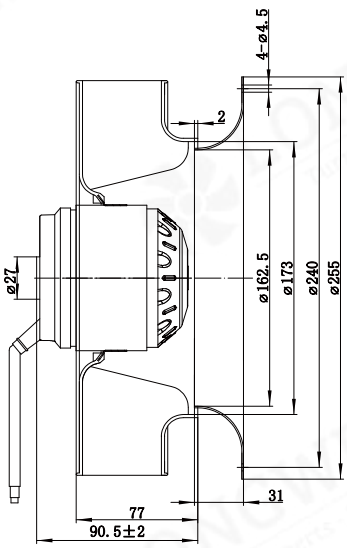

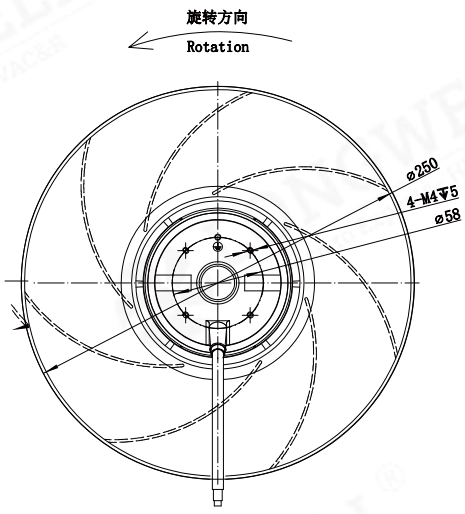

LWBA-250 Series

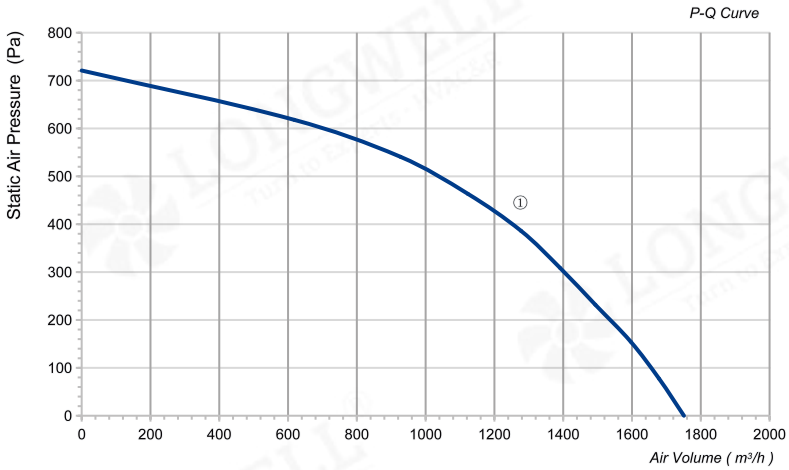





Product Characteristic

- Impeller Material: Aluminum Alloy
- Direction of Rotation: Clockwise,seen on rotor
- Mode of Operation: S1
- Operation Temperature: -40℃～+65℃
- Type of Protection: IP54
- Insulation Class: F
- Bearing: Maintenance-free ball bearings


Technical Specifications

Model	Voltage (V)	Frequency (Hz)	Power (W)	Current (A)	Speed (RPM)	Air Flow (m³/h)	Air Pressure (Pa)	Noise [dB(A)]	Capacitor	Curve
LWBA2E250-092NS-05	230	50	290	1.2	2650	1751	721	76	6uF	①
LWBA2D250-092NT-06	380	50	290	0.9	2800	1751	721	77	/	①

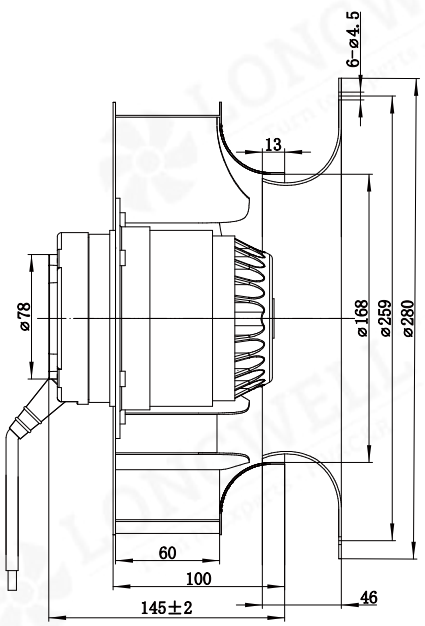

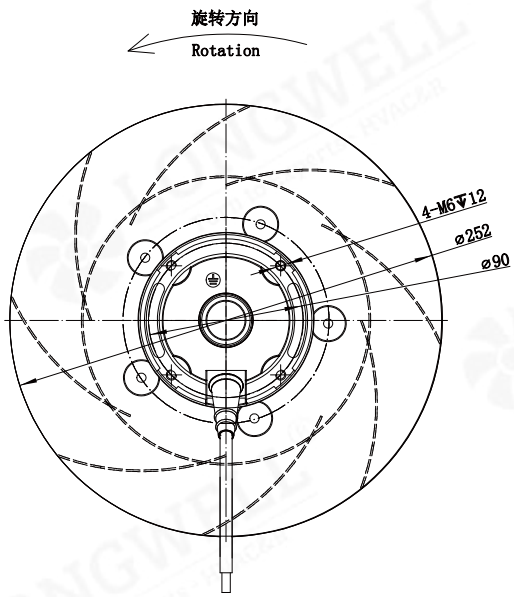

LWBA-250 Series

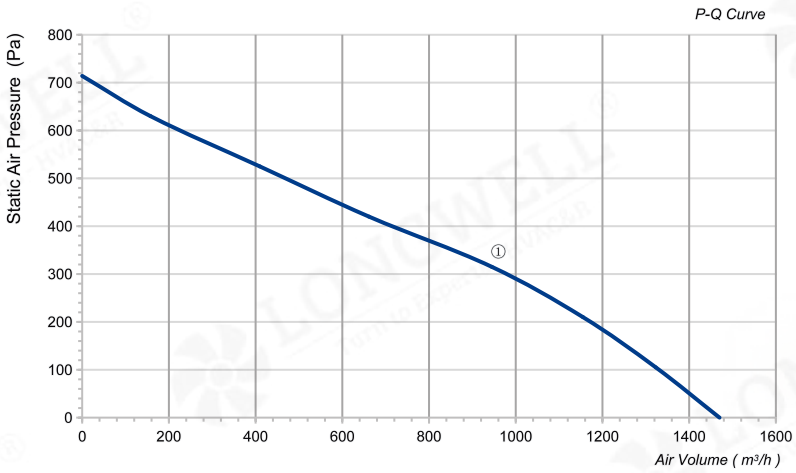





Product Characteristic

- Impeller Material: Plastic PA66
- Direction of Rotation: Clockwise,seen on rotor
- Mode of Operation: S1
- Operation Temperature: -40℃～+65℃
- Type of Protection: IP44
- Insulation Class: F
- Bearing: Maintenance-free ball bearings


Technical Specifications

Model	Voltage (V)	Frequency (Hz)	Power (W)	Current (A)	Speed (RPM)	Air Flow (m³/h)	Air Pressure (Pa)	Noise [dB(A)]	Capacitor	Curve
LWBA2E250-092NS-07	230	50	151	0.66	2700	1470	714	72.7	5uF	①

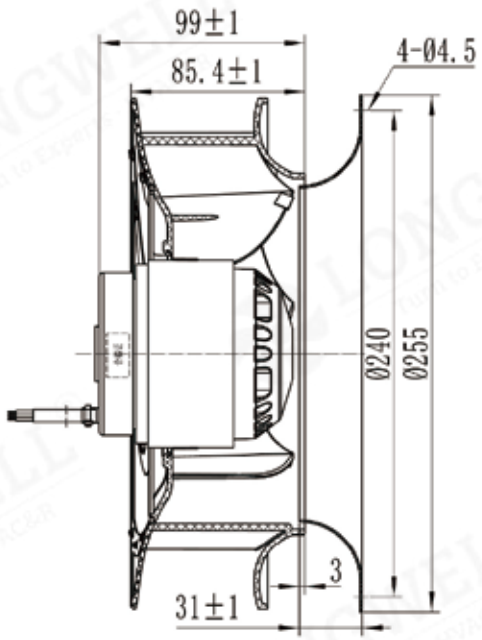

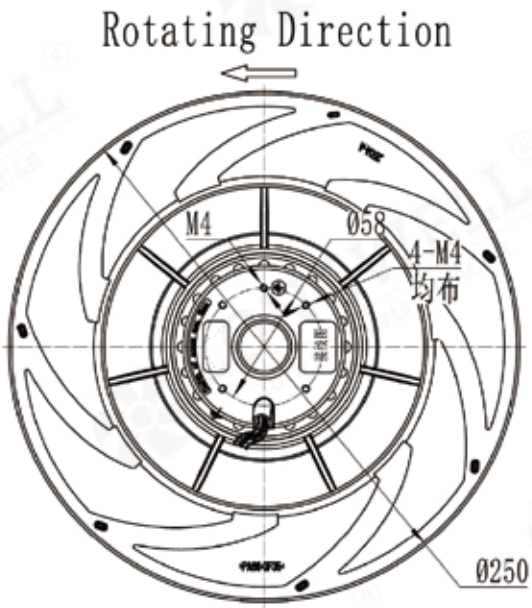

LWBA-250 Series

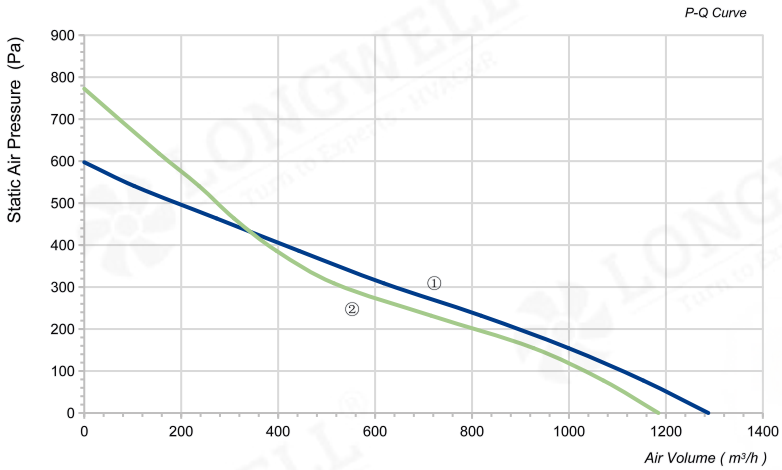





Product Characteristic

- Impeller Material: Plastic PA66
- Direction of Rotation: Clockwise,seen on rotor
- Mode of Operation: S1
- Operation Temperature: -40℃～+65℃
- Type of Protection: IP44
- Insulation Class: F
- Bearing: Maintenance-free ball bearings


Technical Specifications

Model	Voltage (V)	Frequency (Hz)	Power (W)	Current (A)	Speed (RPM)	Air Flow (m³/h)	Air Pressure (Pa)	Noise [dB(A)]	Capacitor	Curve
LWBA2E250-092NS-08	230	50	135	0.6	2450	1288	597	74	4uF	①
LWBA2E250-092NS-09	230	60	190	0.9	2600	1185	773	76	4uF	②
LWBA2D250-092NT-10	380	50	160	0.32	2450	1288	597	74	/	①
LWBA2D250-092NT-11	380	60	185	0.38	2600	1185	773	76	/	②

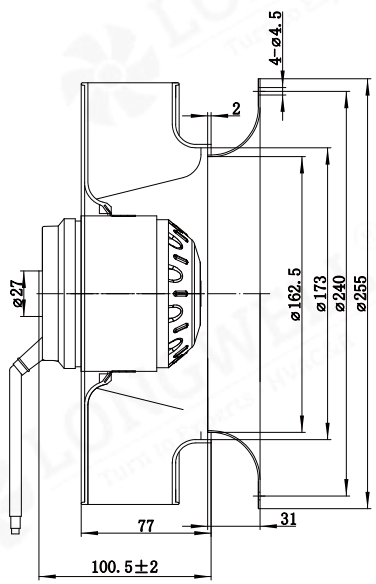

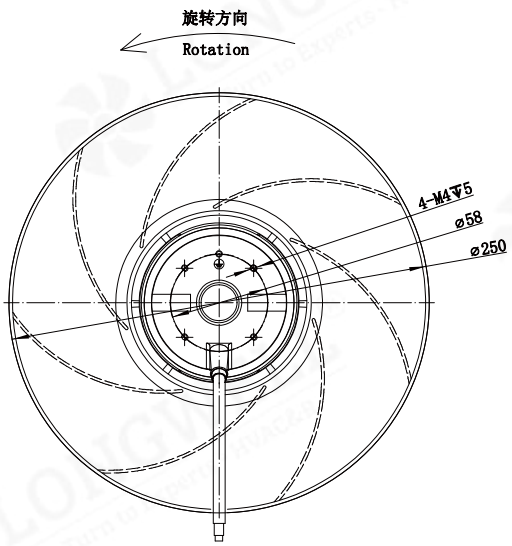

LWBA-250 Series

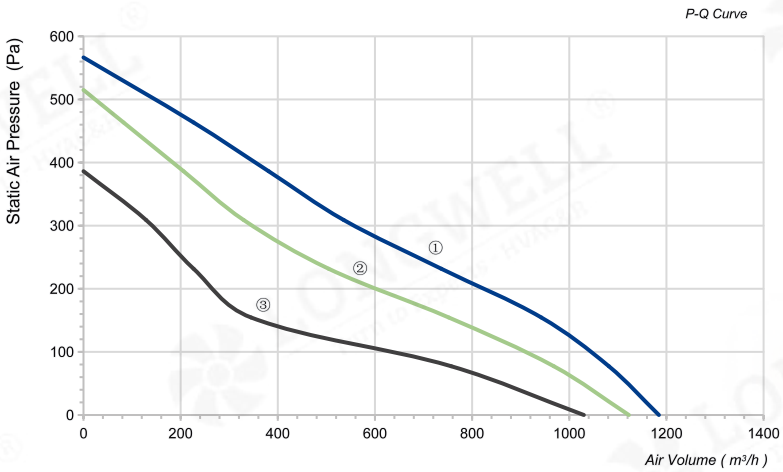





Product Characteristic

- Impeller Material: Plastic PA66
- Direction of Rotation: Clockwise,seen on rotor
- Mode of Operation: S1
- Operation Temperature: -40℃～+65℃
- Type of Protection: IP44
- Insulation Class: F
- Bearing: Maintenance-free ball bearings


Technical Specifications

Model	Voltage (V)	Frequency (Hz)	Power (W)	Current (A)	Speed (RPM)	Air Flow (m³/h)	Air Pressure (Pa)	Noise [dB(A)]	Capacitor	Curve
LWBA2E250-092NS-12	230	50	130	0.62	2650	1185	567	76	4uF	①
			125	0.58	2400	1123	515	70	4uF	②
			120	0.56	2150	1030	386	65	4uF	③

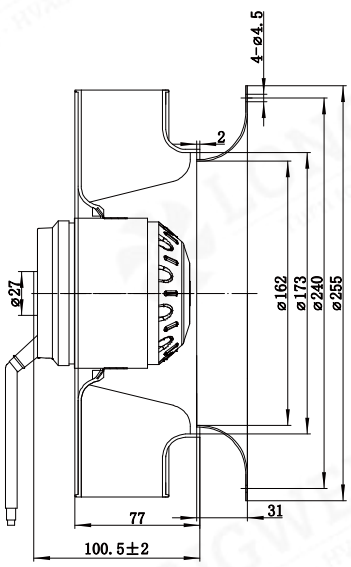

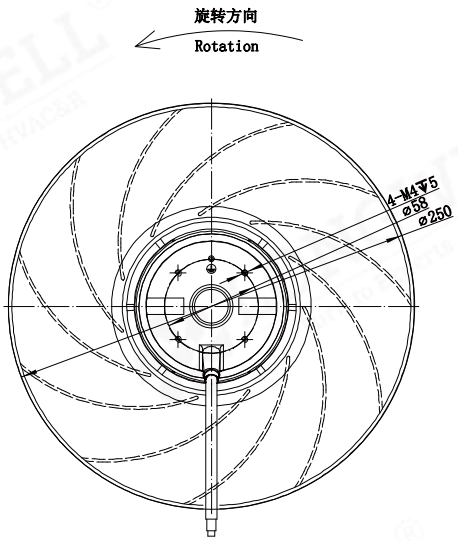

LWBA-250 Series

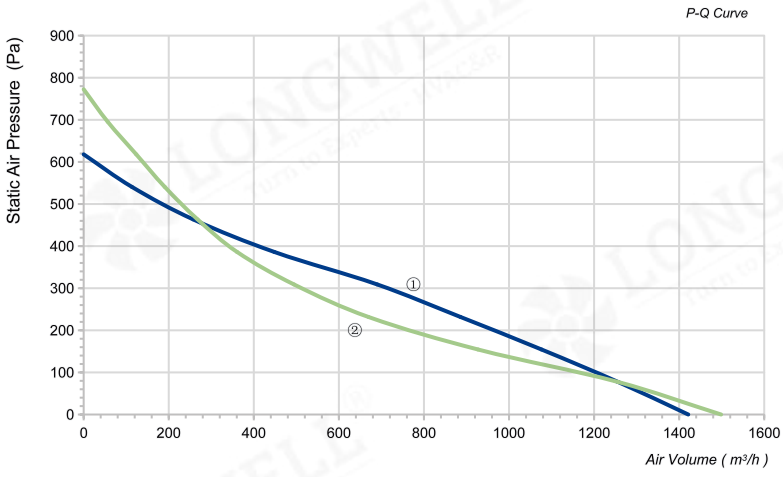





Product Characteristic

- Impeller Material: Galvanised sheet steel
- Direction of Rotation: Clockwise,seen on rotor
- Mode of Operation: S1
- Operation Temperature: -40℃～+65℃
- Type of Protection: IP44
- Insulation Class: F
- Bearing: Maintenance-free ball bearings


Technical Specifications

Model	Voltage (V)	Frequency (Hz)	Power (W)	Current (A)	Speed (RPM)	Air Flow (m³/h)	Air Pressure (Pa)	Noise [dB(A)]	Capacitor	Curve
LWBA2E250-092NS-13	230	50	155	0.7	2500	1421	618	76	4uF	①
LWBA2E250-092NS-14	230	60	210	0.95	2600	1499	773	79	4uF	②
LWBA2D250-092NT-15	380	50	150	0.31	2450	1421	618	76	/	①
LWBA2D250-092NT-16	380	60	200	0.37	2550	1499	773	79	/	②

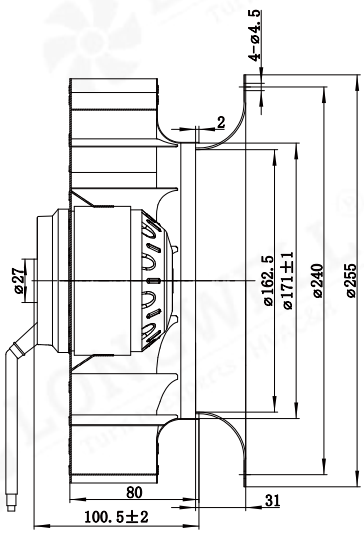

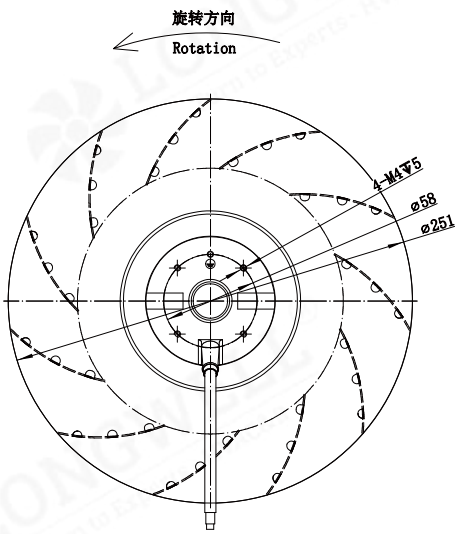

LWBA-250 Series

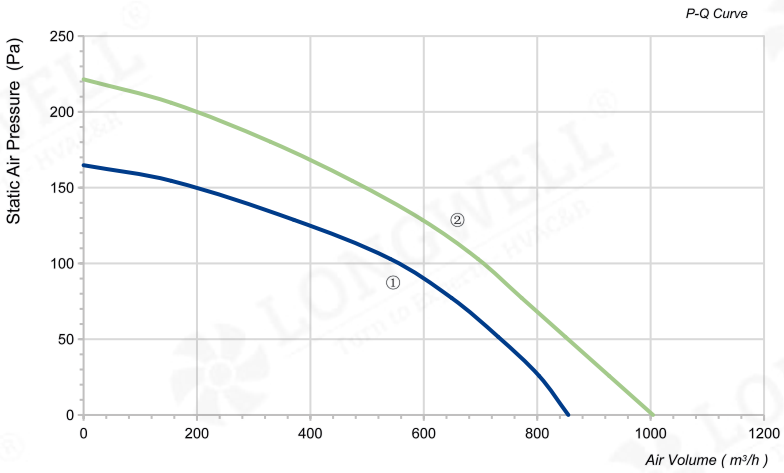



Product Characteristic

- Impeller Material: Galvanised sheet steel
- Direction of Rotation: Clockwise,seen on rotor
- Mode of Operation: S1
- Operation Temperature: -40℃～+65℃
- Type of Protection: IP44
- Insulation Class: F
- Bearing: Maintenance-free ball bearings

Technical Specifications

Model	Voltage (V)	Frequency (Hz)	Power (W)	Current (A)	Speed (RPM)	Air Flow (m³/h)	Air Pressure (Pa)	Noise [dB(A)]	Capacitor	Curve
LWBA4E250-092NS-17	230	50	50	0.24	1400	855	165	68	2uF	①
LWBA4E250-092NS-18	230	60	60	0.27	1600	1004	221	70	2uF	②
LWBA4D250-092NT-19	380	50	50	0.15	1450	855	165	68	/	①
LWBA4D250-092NT-20	380	60	60	0.15	1600	1004	221	70	/	②

