
LWBA-400 Series



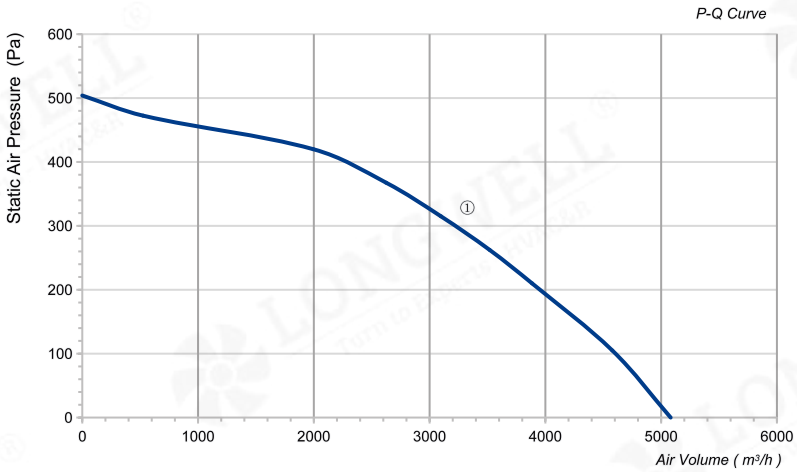



Product Characteristic

- Impeller Material: Aluminum Alloy
- Direction of Rotation: Clockwise,seen on rotor
- Mode of Operation: S1
- Operation Temperature: -40℃～+65℃
- Type of Protection: IP54
- Insulation Class: F
- Bearing: Maintenance-free ball bearings


Technical Specifications

Model	Voltage (V)	Frequency (Hz)	Power (W)	Current (A)	Speed (RPM)	Air Flow (m³/h)	Air Pressure (Pa)	Noise [dB(A)]	Capacitor	Curve
LWBA4D400-138NT-11	380	50	484	1.27	1400	5082	504	72	/	①

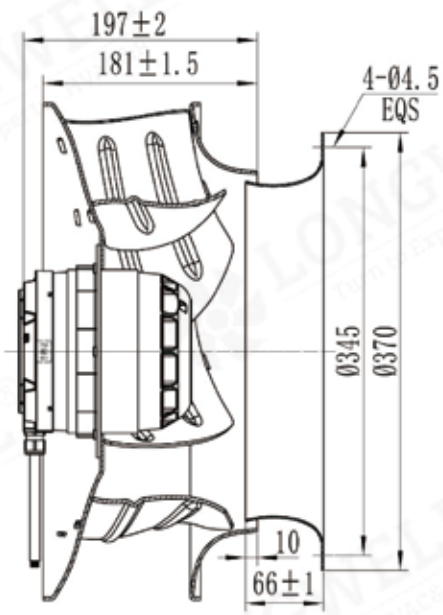

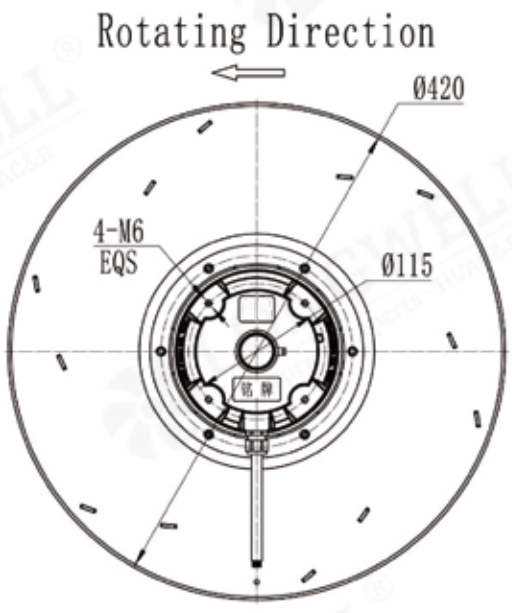

LWBA-400 Series

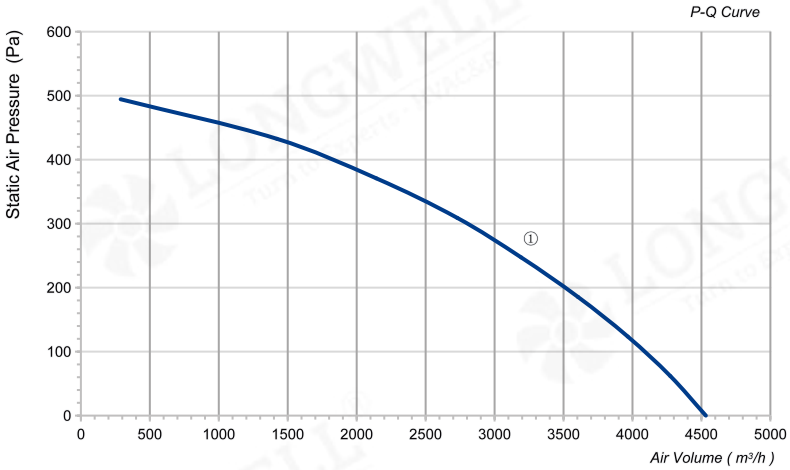





Product Characteristic

- Impeller Material: Aluminum Alloy
- Direction of Rotation: Clockwise,seen on rotor
- Mode of Operation: S1
- Operation Temperature: -40℃～+65℃
- Type of Protection: IP54
- Insulation Class: F
- Bearing: Maintenance-free ball bearings

Technical Specifications

Model	Voltage (V)	Frequency (Hz)	Power (W)	Current (A)	Speed (RPM)	Air Flow (m³/h)	Air Pressure (Pa)	Noise [dB(A)]	Capacitor	Curve
LWBA4E400-138NS-07	230	50	550	2.5	1380	4532	494	69	10uF	①
LWBA4D400-138NT-08	380	50	550	1.2	1370	4532	494	69	/	①

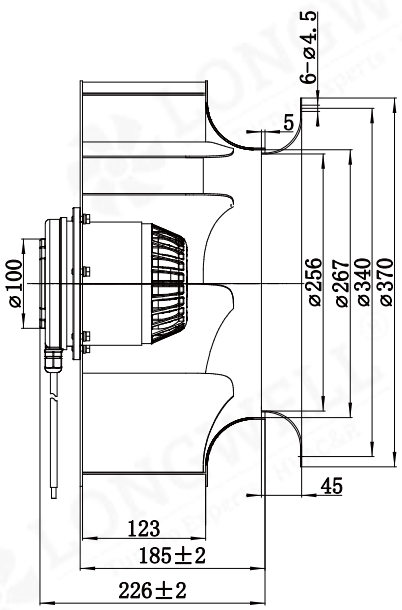

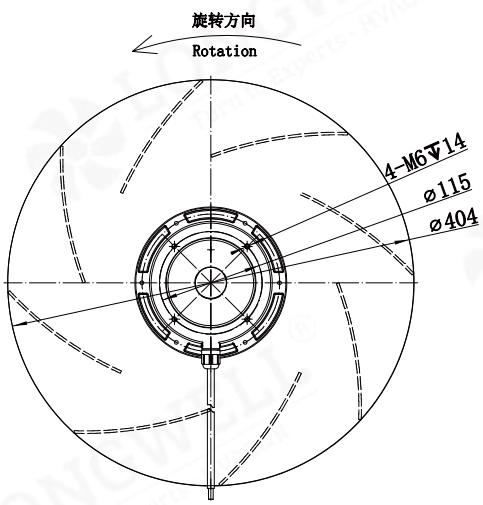

Ningbo Longwell Electric Technology Co., Ltd
https://www.longwellfans.com Email:sales@zjlongwell.com

LWBA-400 Series




Product Characteristic


- Impeller Material: Aluminum Alloy
- Direction of Rotation: Clockwise,seen on rotor
- Mode of Operation: S1
- Type of Protection: IP54
- Insulation Class: F
- Bearing: Maintenance-free ball bearings
- Operation Temperature: -40~+65℃

Technical Specifications


Model	Voltage (V)	Frequency (Hz)	Power (W)	Current (A)	Speed (RPM)	Air Flow (m³/h)	Air Pressure (Pa)	Noise [dB(A)]	Capacitor	Curve
LWBA4E400-102NS-01	230	50	260	1.2	1350	2936	464	64	7uF	①
LWBA4E400-102NS-02	230	60	330	1.5	1450	3090	515	68	6uF	②
LWBA4D400-102NT-03	380	50	265	0.6	1380	2936	464	64	/	①
LWBA4D400-102NT-04	380	60	320	0.75	1460	3090	515	68	/	②
LWBA6E400-102NS-05	230	50	135	0.72	940	2163	216	56	6uF	③
LWBA6E400-102NS-06	230	60	155	0.85	1050	2421	278	57	6uF	④

Product Drawing (mm)

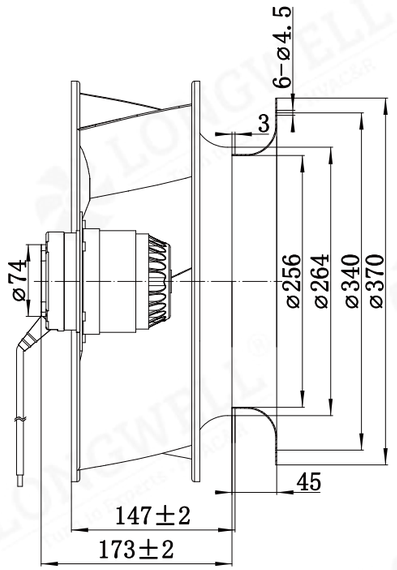


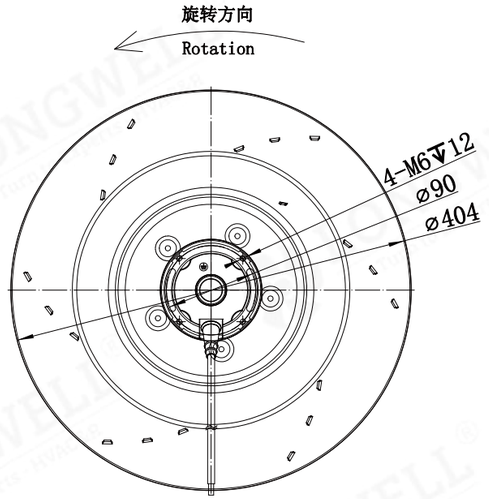

Flow Rate Curve

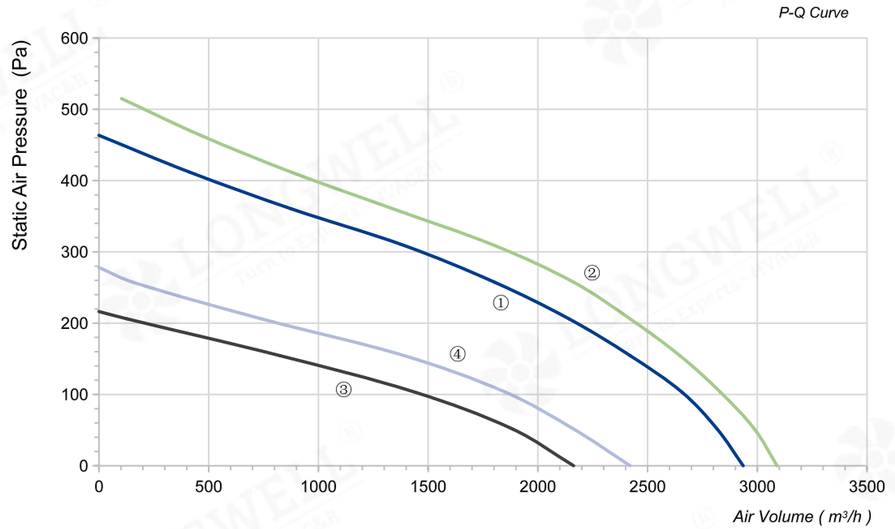

LWBA-400 Series

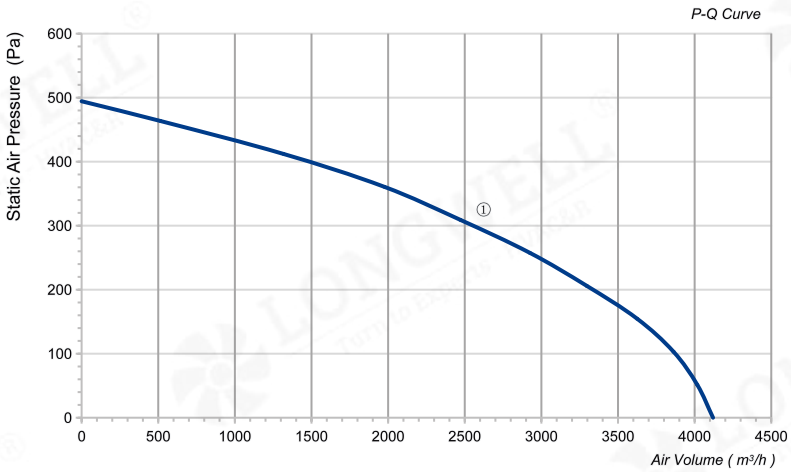



Product Characteristic

- Impeller Material: Aluminum Alloy
- Direction of Rotation: Clockwise,seen on rotor
- Mode of Operation: S1
- Operation Temperature: -40℃～+65℃
- Type of Protection: IP54
- Insulation Class: F
- Bearing: Maintenance-free ball bearings

Technical Specifications

Model	Voltage (V)	Frequency (Hz)	Power (W)	Current (A)	Speed (RPM)	Air Flow (m³/h)	Air Pressure (Pa)	Noise [dB(A)]	Capacitor	Curve
LWBA4E400-138NS-09	230	50	430	1.5	1380	4120	494	66	10uF	①
LWBA4D400-138NT-10	380	60	440	0.8	1380	4120	494	66	/	①

