
# LWBA-500 Series



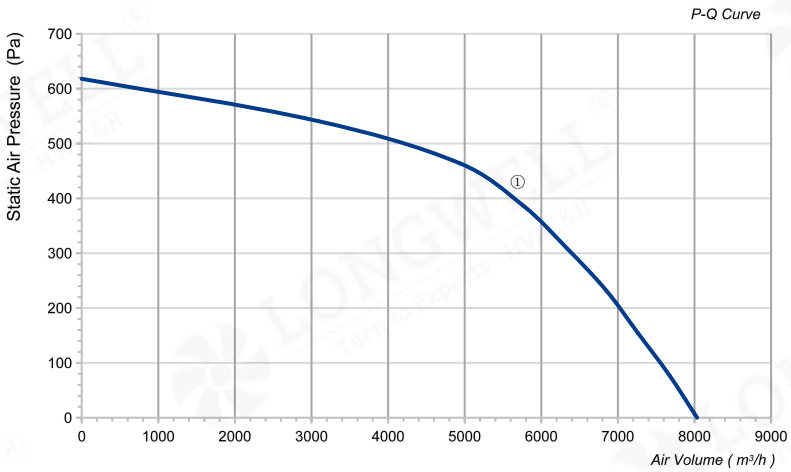




## Product Characteristic

- Impeller Material: Aluminum Alloy
- Direction of Rotation: Clockwise,seen on rotor
- Mode of Operation: S1
- Operation Temperature: -40℃～+65℃
- Type of Protection: IP54
- Insulation Class: F
- Bearing: Maintenance-free ball bearings


## Technical Specifications

| Model | Voltage (V) | Frequency (Hz) | Power (W) | Current (A) | Speed (RPM) | Air Flow (m³/h) | Air Pressure (Pa) | Noise [dB(A)] | Capacitor | Curve |
|---|---|---|---|---|---|---|---|---|---|---|
| LWBA4D500-188NT-01 | 380 | 50 | 1000 | 2.1 | 1350 | 8034 | 618 | 79 | / | ① |

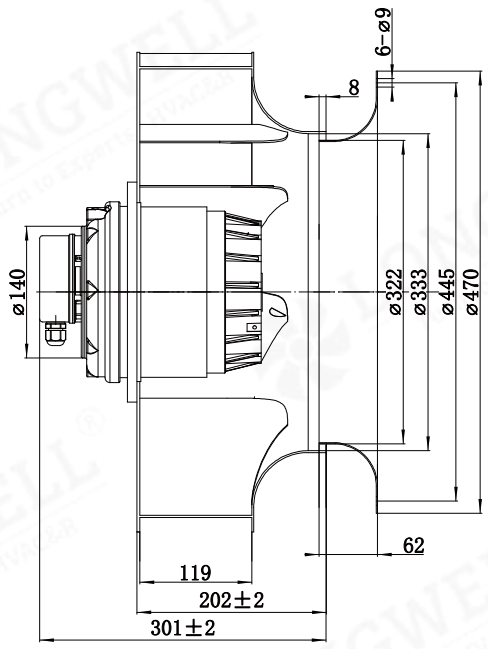
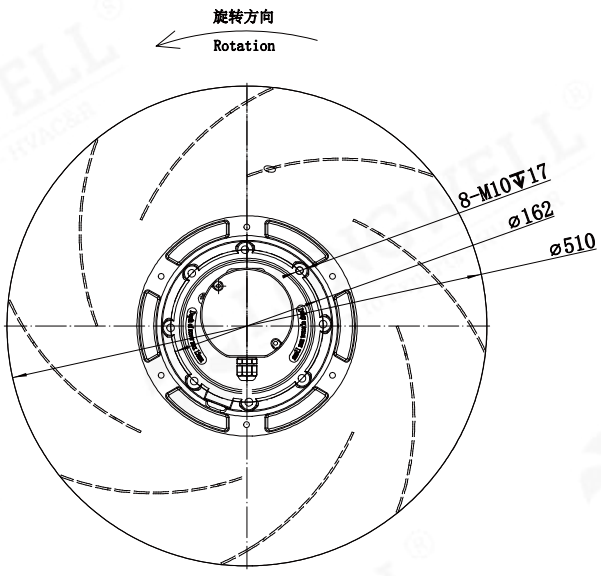
# LWBA-500 Series



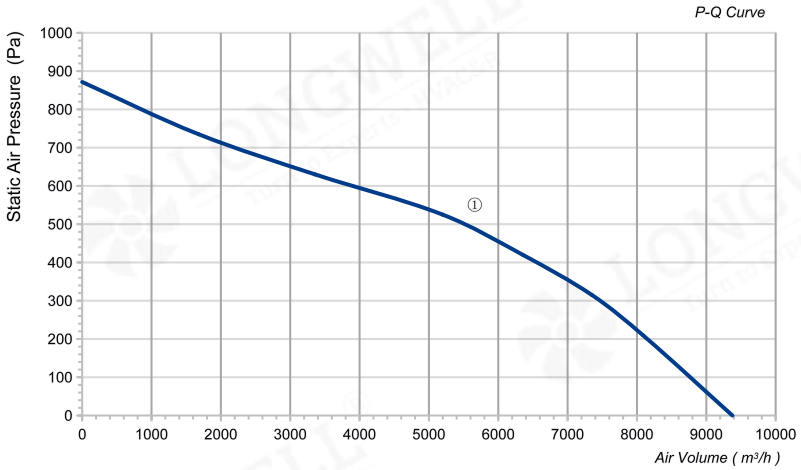





## Product Characteristic

- Impeller Material: Aluminum Alloy
- Direction of Rotation: Clockwise,seen on rotor
- Mode of Operation: S1
- Operation Temperature: -40℃～+65℃
- Type of Protection: IP54
- Insulation Class: F
- Bearing: Maintenance-free ball bearings


## Technical Specifications

| Model | Voltage (V) | Frequency (Hz) | Power (W) | Current (A) | Speed (RPM) | Air Flow (m³/h) | Air Pressure (Pa) | Noise [dB(A)] | Capacitor | Curve |
|---|---|---|---|---|---|---|---|---|---|---|
| LWBA4D500-188NT-05 | 380 | 50 | 1300 | 2.6 | 1350 | 9377 | 872 | 81.9 | / | ① |

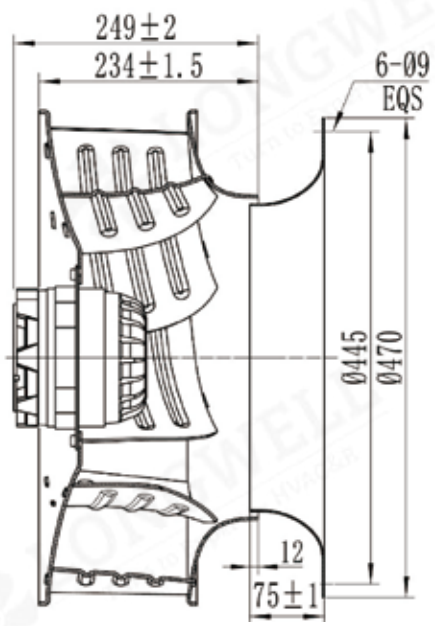
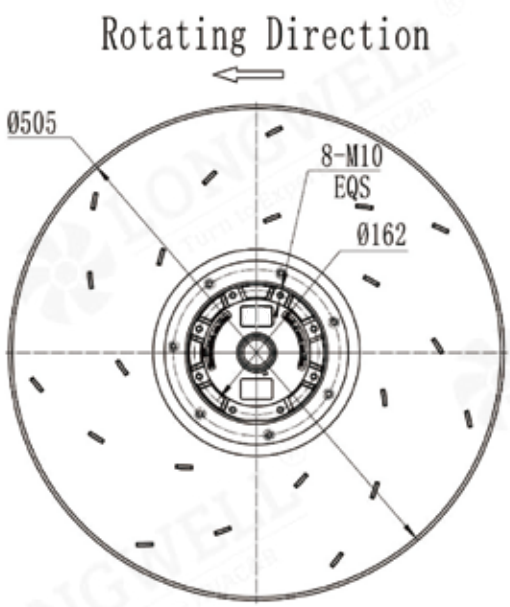
# LWBA-500 Series



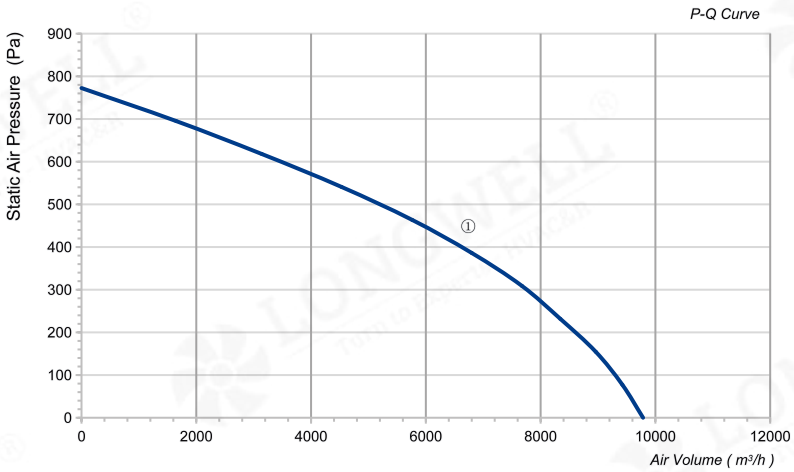




## Product Characteristic

- Impeller Material: Aluminum Alloy
- Direction of Rotation: Clockwise,seen on rotor
- Mode of Operation: S1
- Operation Temperature: -40℃～+65℃
- Type of Protection: IP54
- Insulation Class: F
- Bearing: Maintenance-free ball bearings


## Technical Specifications

| Model | Voltage (V) | Frequency (Hz) | Power (W) | Current (A) | Speed (RPM) | Air Flow (m³/h) | Air Pressure (Pa) | Noise [dB(A)] | Capacitor | Curve |
|---|---|---|---|---|---|---|---|---|---|---|
| LWBA4D500-188NT-02 | 380 | 50 | 1500 | 2.6 | 1400 | 9785 | 773 | 80 | / | ① |

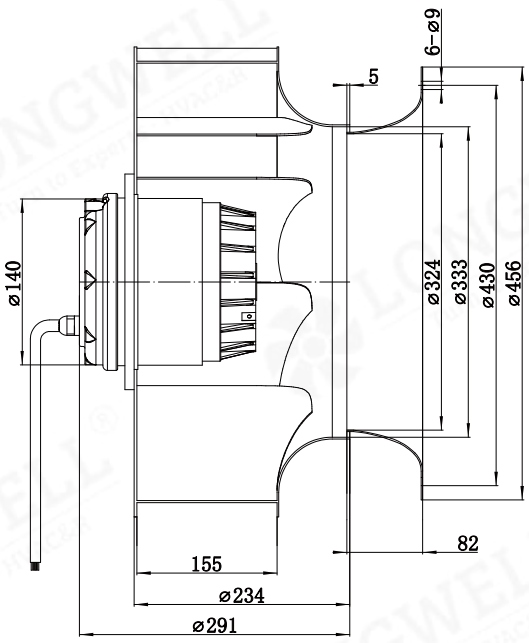
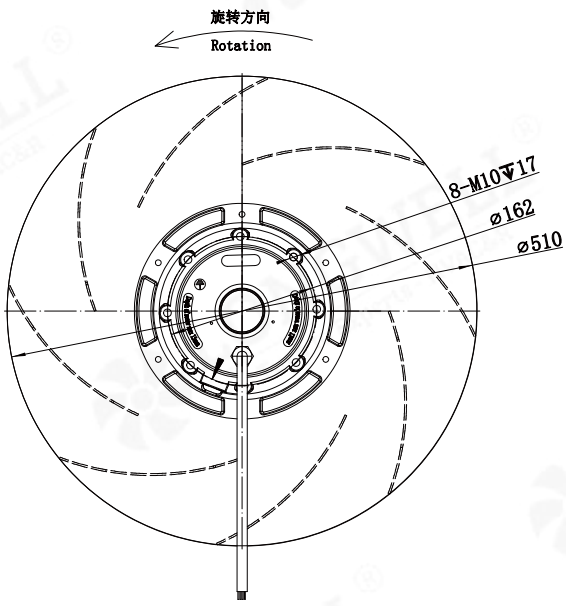
# LWBA-500 Series



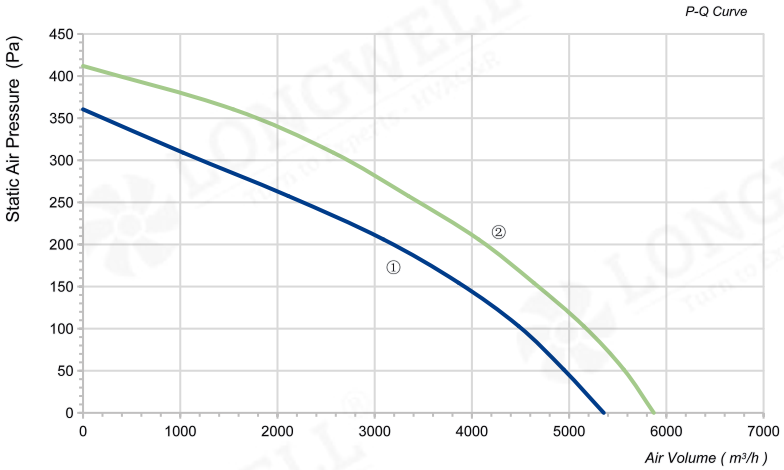


## Product Characteristic

- Impeller Material: Aluminum Alloy
- Direction of Rotation: Clockwise,seen on rotor
- Mode of Operation: S1
- Operation Temperature: -40℃～+65℃
- Type of Protection: IP54
- Insulation Class: F
- Bearing: Maintenance-free ball bearings

## Technical Specifications

| Model | Voltage (V) | Frequency (Hz) | Power (W) | Current (A) | Speed (RPM) | Air Flow (m³/h) | Air Pressure (Pa) | Noise [dB(A)] | Capacitor | Curve |
|---|---|---|---|---|---|---|---|---|---|---|
| LWBA6D500-138NT-03 | 380 | 50 | 450 | 1.25 | 950 | 5356 | 361 | 63 | / | ① |
| LWBA6D500-138NT-04 | 380 | 60 | 550 | 1.4 | 1050 | 5871 | 412 | 65 | / | ② |

