
LWBA-630 Series



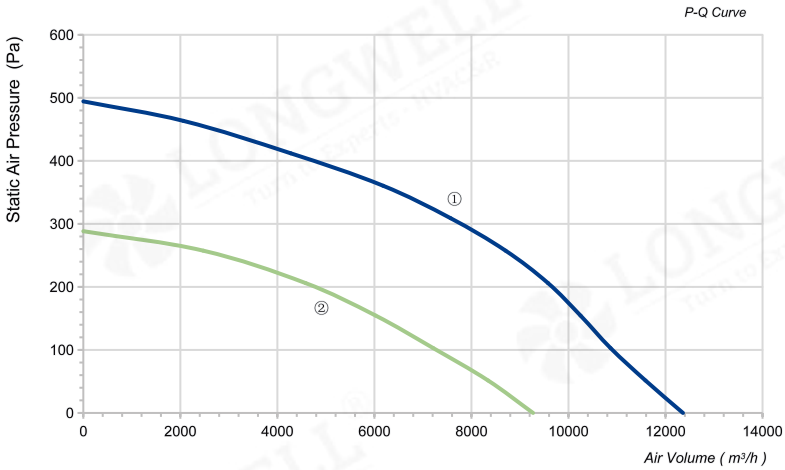



Product Characteristic

- Impeller Material: Aluminum Alloy
- Direction of Rotation: Clockwise,seen on rotor
- Mode of Operation: S1
- Operation Temperature: -40℃～+65℃
- Type of Protection: IP54
- Insulation Class: F
- Bearing: Maintenance-free ball bearings


Technical Specifications

Model	Voltage (V)	Frequency (Hz)	Power (W)	Current (A)	Speed (RPM)	Air Flow (m³/h)	Air Pressure (Pa)	Noise [dB(A)]	Capacitor	Curve
LWBA6D630-188NT-01	380	50	1500	3.8	900	12360	494	80	/	①
LWBA8D630-188NT-02	380	50	700	1.7	700	9270	288	72	/	②

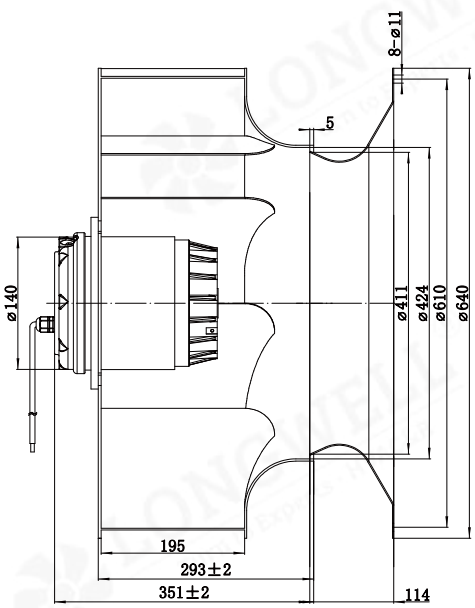

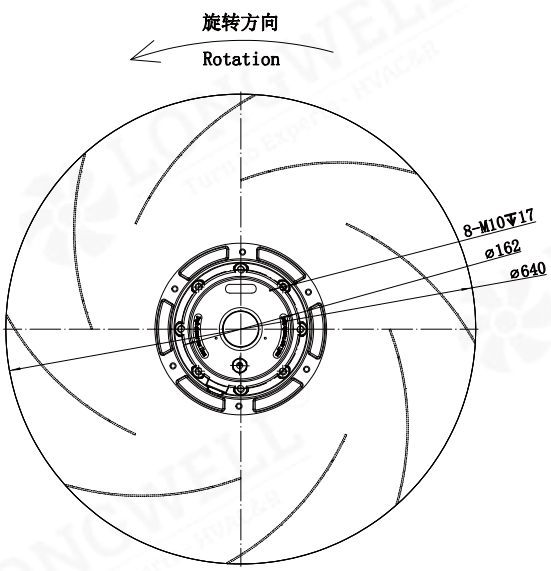

LWBA-630 Series

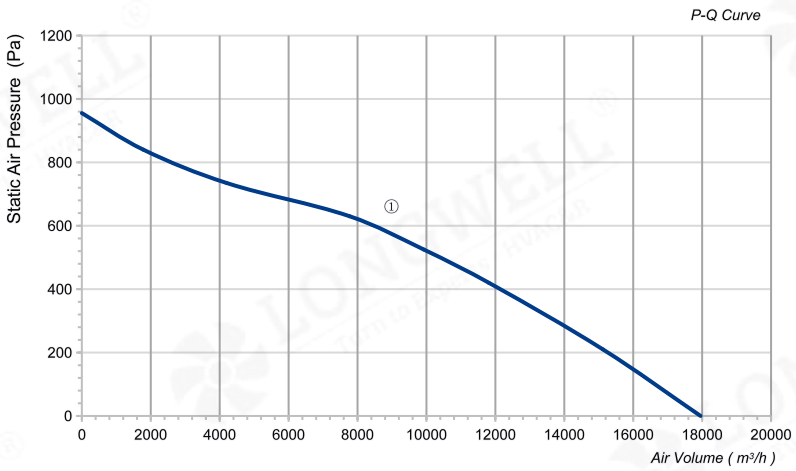



Product Characteristic

- Impeller Material: Aluminum Alloy
- Direction of Rotation: Clockwise,seen on rotor
- Mode of Operation: S1
- Operation Temperature: -40℃～+65℃
- Type of Protection: IP54
- Insulation Class: F
- Bearing: Maintenance-free ball bearings

Technical Specifications

Model	Voltage (V)	Frequency (Hz)	Power (W)	Current (A)	Speed (RPM)	Air Flow (m³/h)	Air Pressure (Pa)	Noise [dB(A)]	Capacitor	Curve
LWBA4D630-188NT-03	380	50	3320	5.87	1210	17955	956	86.9	/	①

