
LWFD-120 Serise



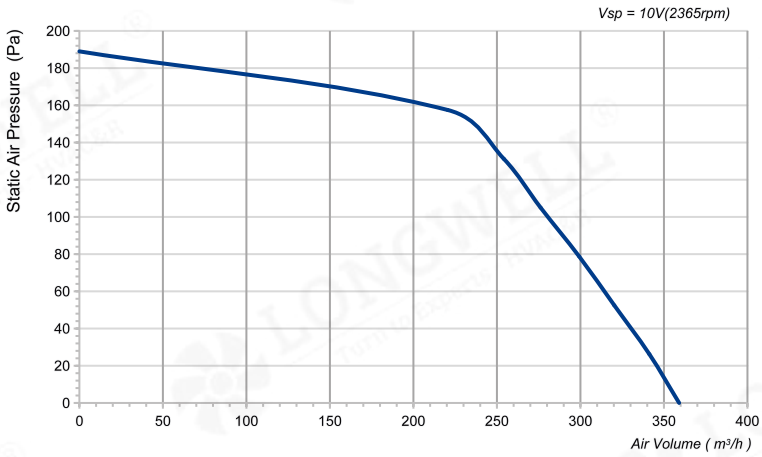


Product Characteristic


• Material:	Galvanised sheet steel	• Type of Protection:	IP54
• Bearing:	Maintenance-free ball bearings	• Insulation Class:	F
• Mode of Operation:	S1	• Operation Temperature:	-30℃～+60℃

CE RoHS BSCI ISO EAC UL LVD


Technical Specifications

Model	Voltage (V)	Power (W)	Current (A)	Speed (RPM)	Air Flow (m³/h)	Air Pressure (Pa)	Noise [dB(A)]	Curve
LWFD3G120-072SH-01	48	67	1.4	2365	359	189	/	/

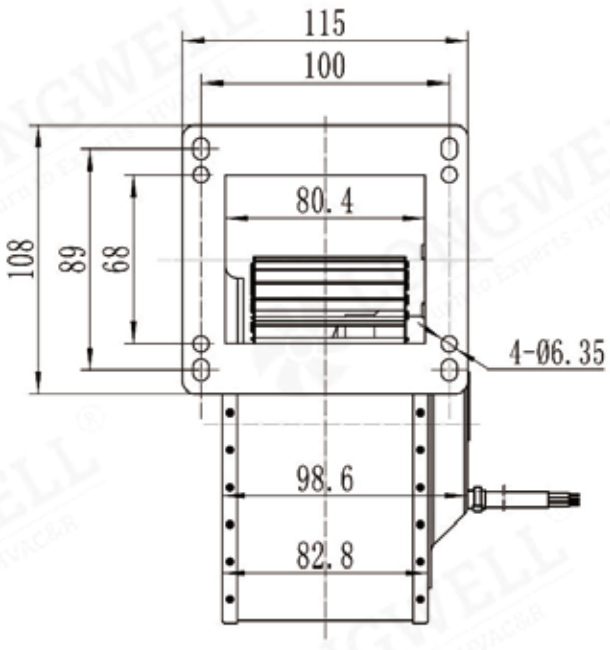

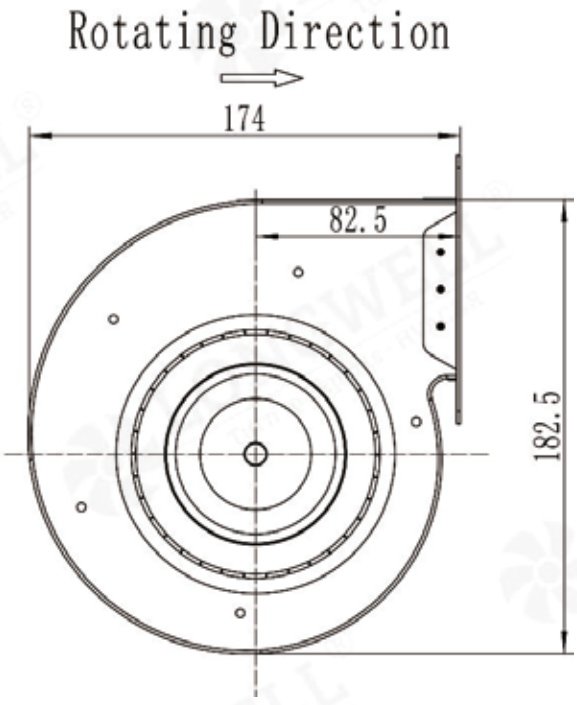

LWFD-120 Serise

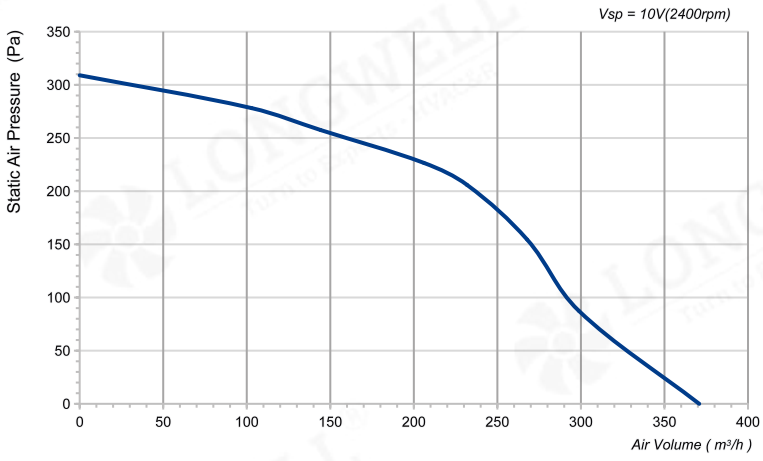




Product Characteristic


- Material: Plastic PA66
- Bearing: Maintenance-free ball bearings
- Mode of Operation: S1
- Type of Protection: IP54
- Insulation Class: B
- Operation Temperature: -30℃～+60℃

Technical Specifications

Model	Voltage (V)	Power (W)	Current (A)	Speed (RPM)	Air Flow (m³/h)	Air Pressure (Pa)	Noise [dB(A)]	Curve
LWFD3G120-072SM-01	24	95	3.96	2400	371	309	60	/
LWFD3G120-072SH-02	48	95	1.98	2400	371	309	60	/

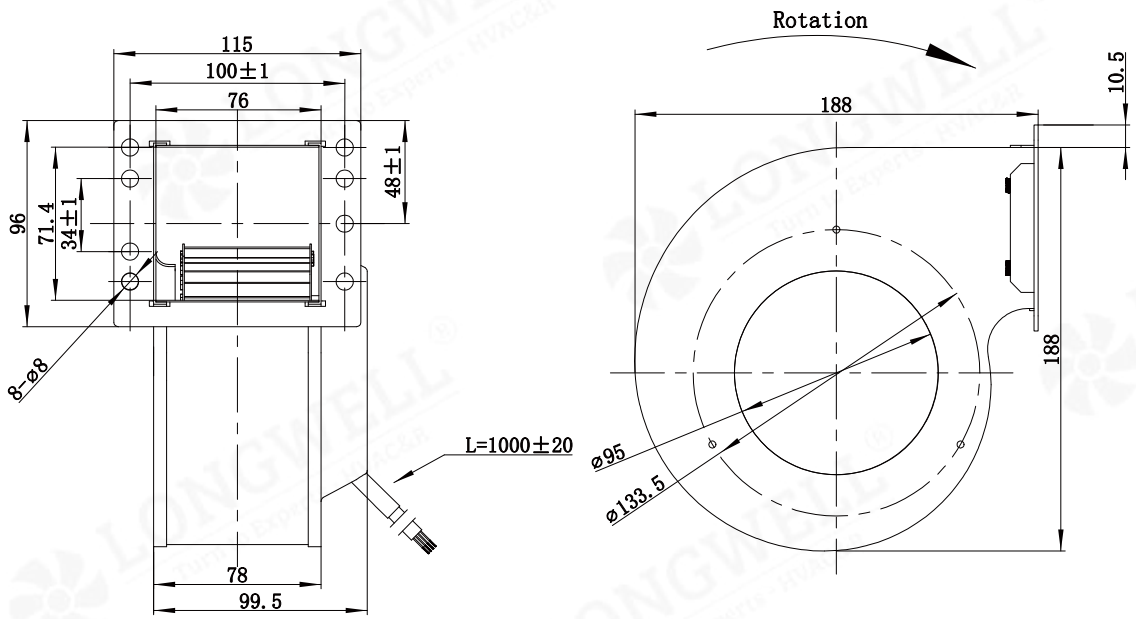

LWFD-120 Serise

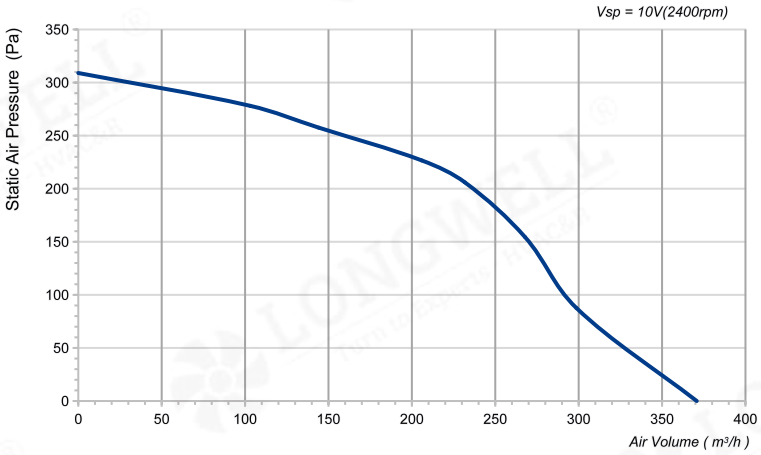





Product Characteristic

- Material: Plastic PA66
- Bearing: Maintenance-free ball bearings
- Mode of Operation: S1
- Type of Protection: IP54
- Insulation Class: B
- Operation Temperature: -30℃～+60℃


Technical Specifications

Model	Voltage (V)	Power (W)	Current (A)	Speed (RPM)	Air Flow (m³/h)	Air Pressure (Pa)	Noise [dB(A)]	Curve
LWFD3G120-072SM-02	24	95	3.96	2400	371	309	60	/
LWFD3G120-072SH-03	48	95	1.98	2400	371	309	60	/

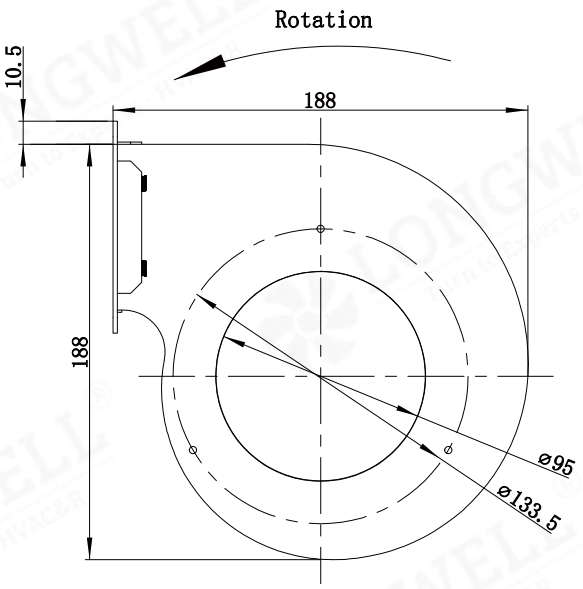

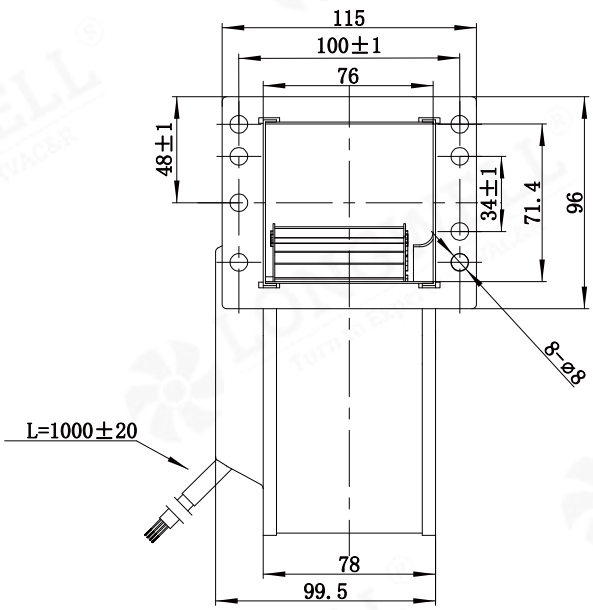

LWFD-120 Serise

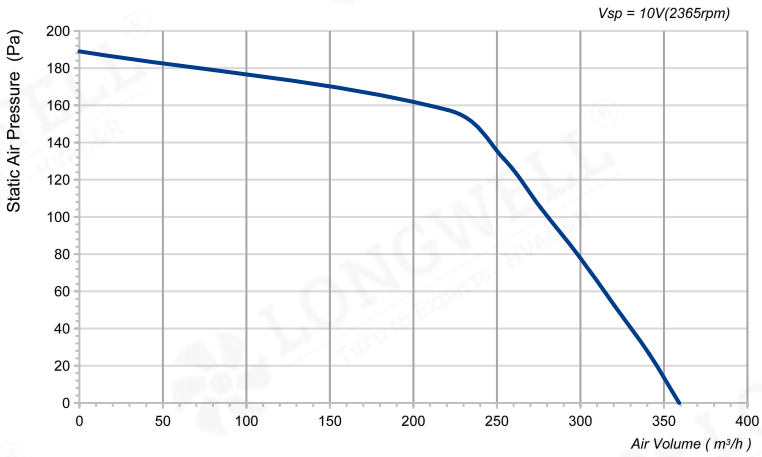




Product Characteristic


- Material: Plastic PA66
- Bearing: Maintenance-free ball bearings
- Mode of Operation: S1
- Type of Protection: IP54
- Insulation Class: B
- Operation Temperature: -30℃～+60℃

Technical Specifications

Model	Voltage (V)	Power (W)	Current (A)	Speed (RPM)	Air Flow (m³/h)	Air Pressure (Pa)	Noise [dB(A)]	Curve
LWFD3G120-072SZ-01	310	65	0.21	2200	319	247	57	/

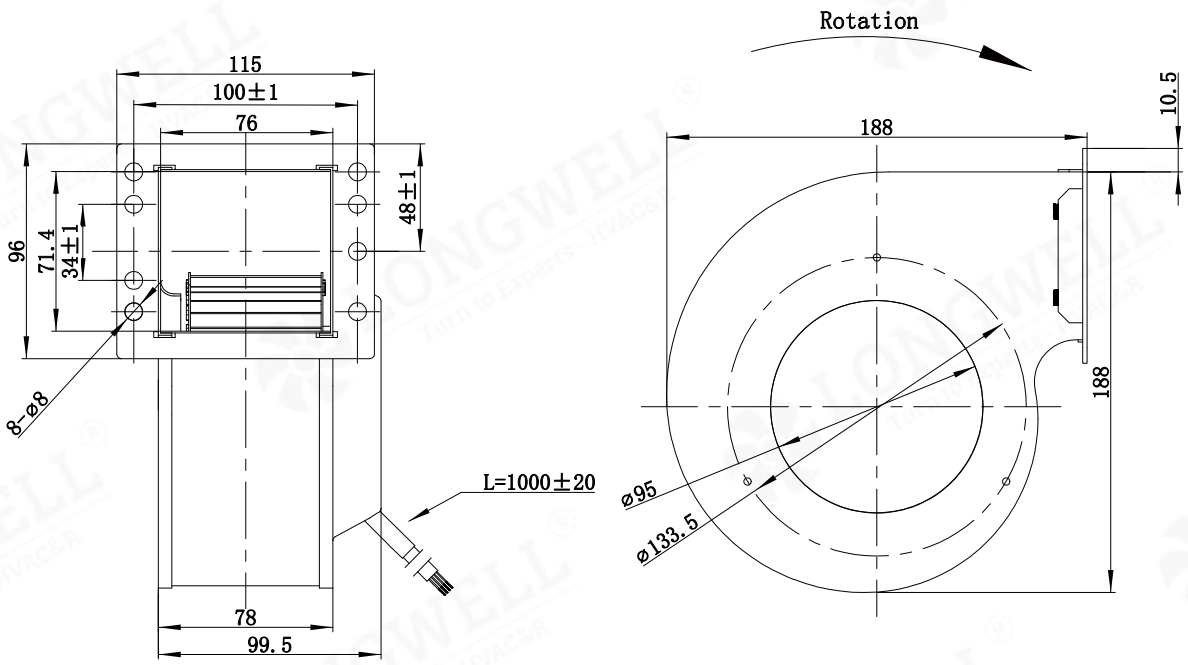

LWFD-120 Serise

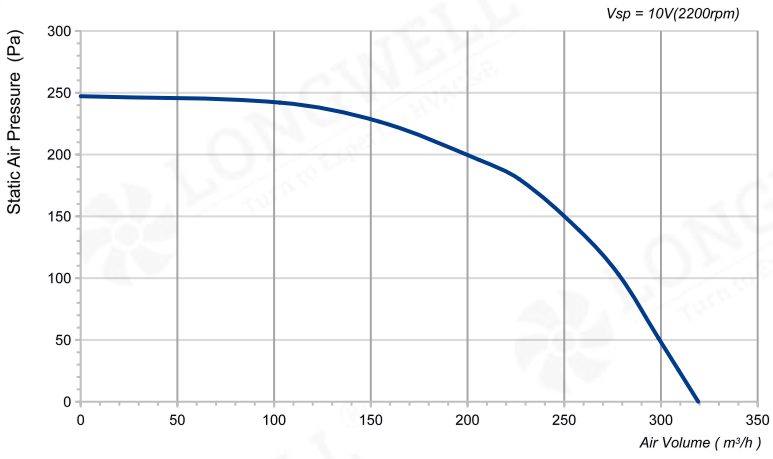



Product Characteristic

- Material: Plastic PA66
- Bearing: Maintenance-free ball bearings
- Mode of Operation: S1
- Type of Protection: IP54
- Insulation Class: B
- Operation Temperature: -30℃～+60℃

Technical Specifications

Model	Voltage (V)	Power (W)	Current (A)	Speed (RPM)	Air Flow (m³/h)	Air Pressure (Pa)	Noise [dB(A)]	Curve
LWFD3G120-072SZ-02	310	65	0.21	2200	319	247	57	/

