
LWFD-160 Serise



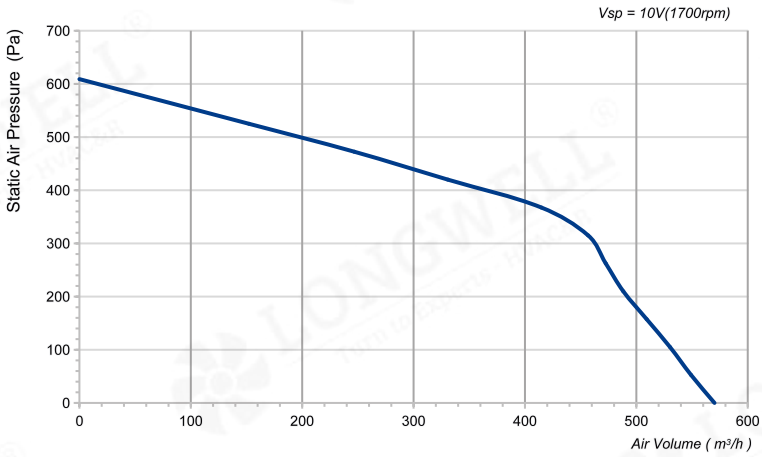


Product Characteristic


• Material:	Galvanised sheet steel	• Type of Protection:	IP54
• Bearing:	Maintenance-free ball bearings	• Insulation Class:	F
• Mode of Operation:	S1	• Operation Temperature:	-30℃～+60℃

CE RoHS BSCI ISO EAC UL LVD


Technical Specifications

Model	Voltage (V)	Power (W)	Current (A)	Speed (RPM)	Air Flow (m³/h)	Air Pressure (Pa)	Noise [dB(A)]	Curve
LWFD3G160-092SH-01	48	92	1.92	1700	570	609	/	/

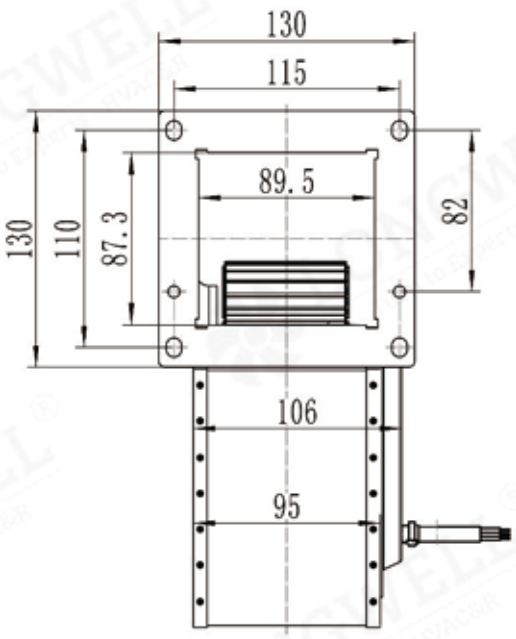

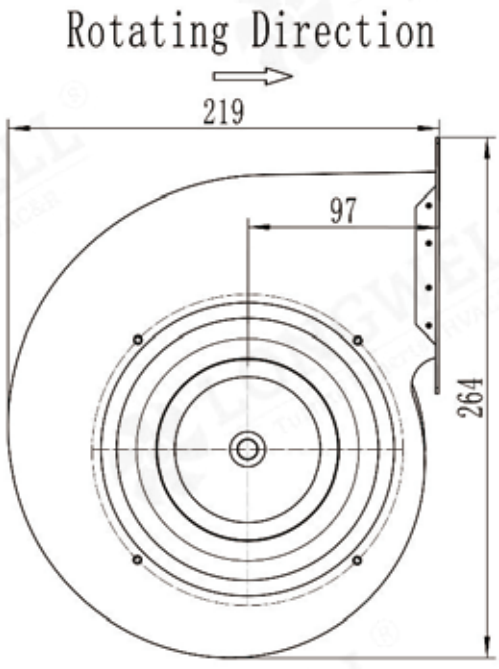

LWFD-160 Serise

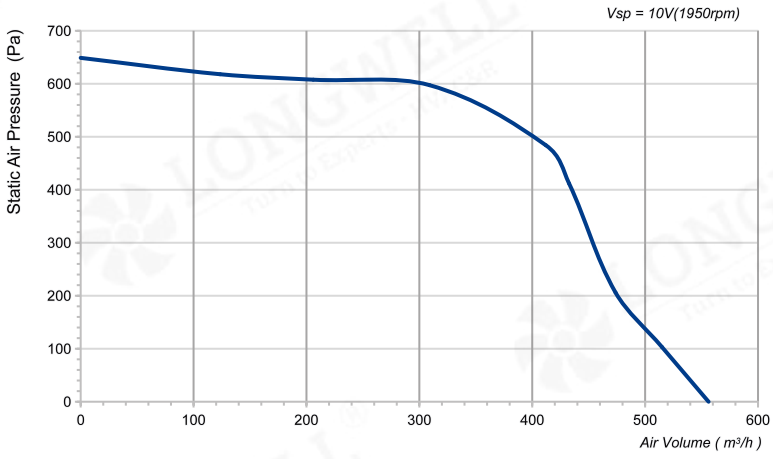




Product Characteristic


- Material: Plastic PA66
- Bearing: Maintenance-free ball bearings
- Mode of Operation: S1
- Type of Protection: IP54
- Insulation Class: B
- Operation Temperature: -30℃～+60℃

Technical Specifications

Model	Voltage (V)	Power (W)	Current (A)	Speed (RPM)	Air Flow (m³/h)	Air Pressure (Pa)	Noise [dB(A)]	Curve
LWFD3G160-092SM-01	24	105	4.4	1950	556	649	62	/
LWFD3G160-092SH-02	48	105	2.2	1950	556	649	62	/

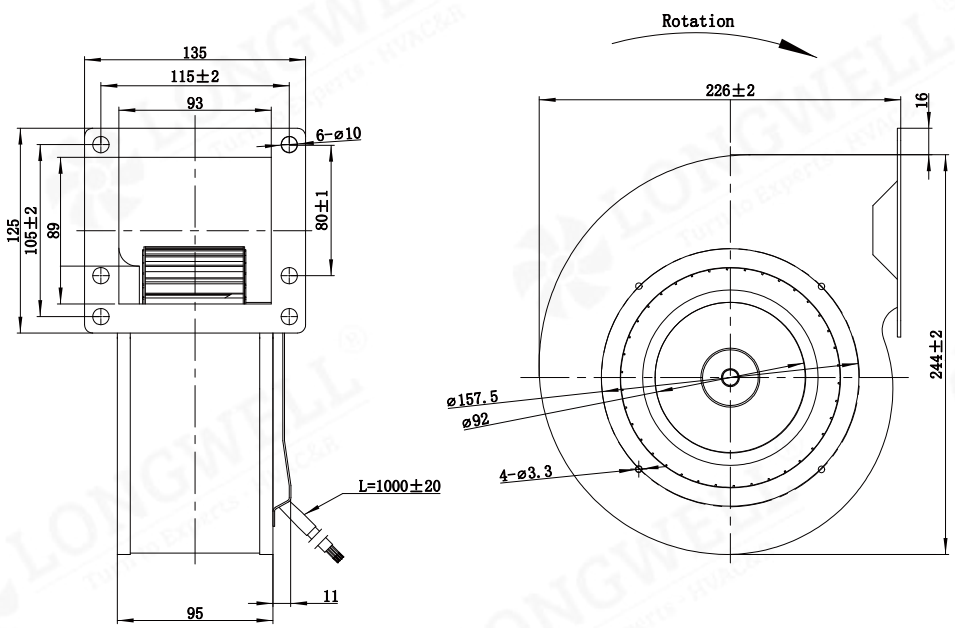

LWFD-160 Serise

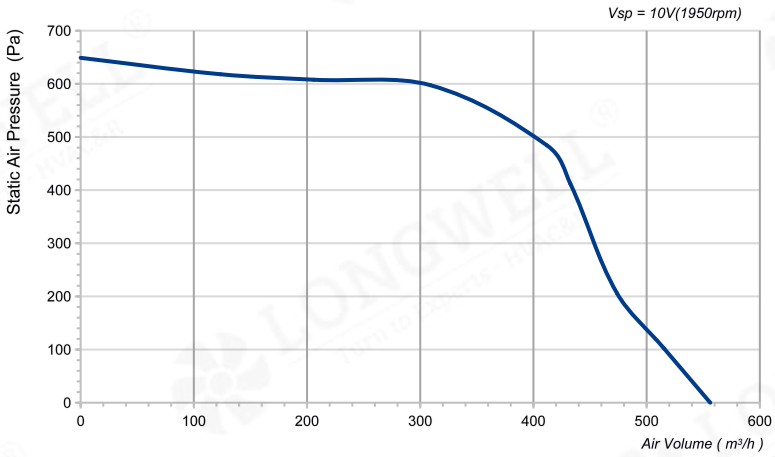




Product Characteristic


- Material: Plastic PA66
- Bearing: Maintenance-free ball bearings
- Mode of Operation: S1
- Type of Protection: IP54
- Insulation Class: B
- Operation Temperature: -30℃～+60℃

Technical Specifications

Model	Voltage (V)	Power (W)	Current (A)	Speed (RPM)	Air Flow (m³/h)	Air Pressure (Pa)	Noise [dB(A)]	Curve
LWFD3G160-092SM-02	24	105	4.4	1950	556	649	62	/
LWFD3G160-092SH-03	48	105	2.2	1950	556	649	62	/

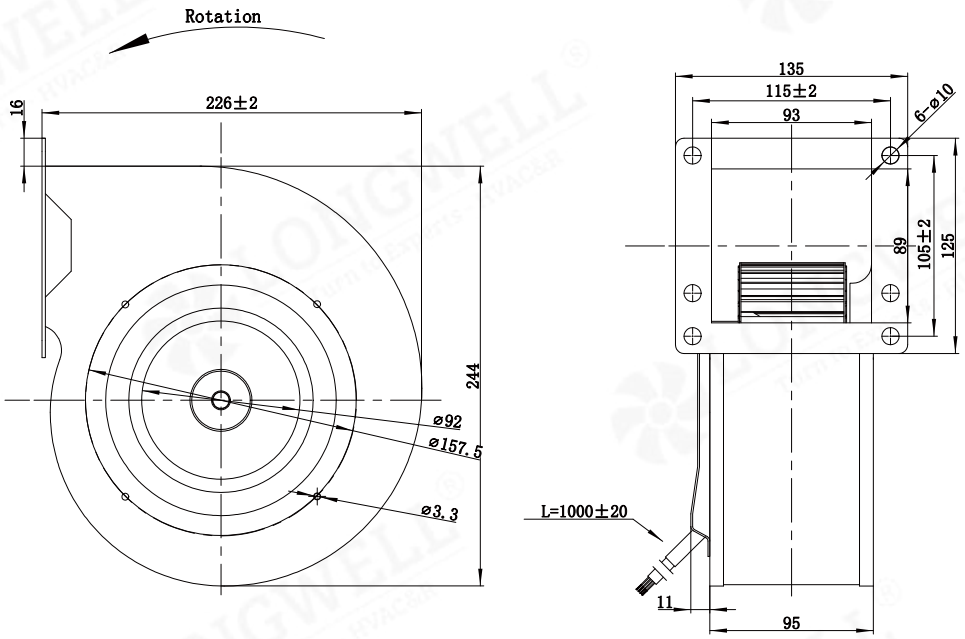

LWFD-160 Serise

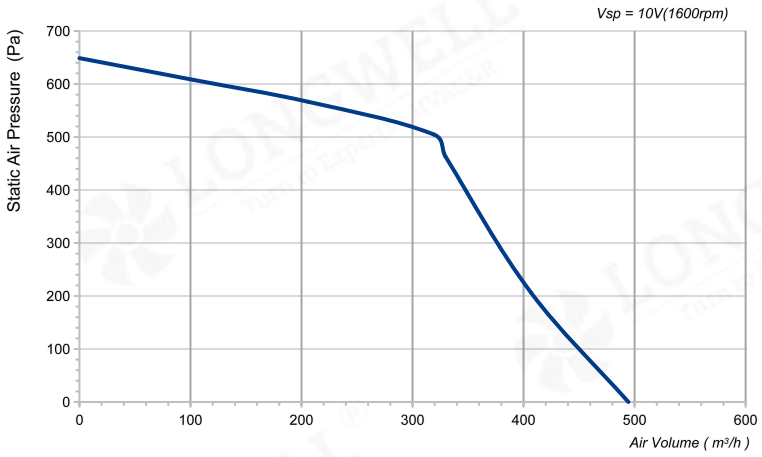




Product Characteristic


- Material: Plastic PA66
- Bearing: Maintenance-free ball bearings
- Mode of Operation: S1
- Type of Protection: IP54
- Insulation Class: B
- Operation Temperature: -30℃～+60℃

Technical Specifications

Model	Voltage (V)	Power (W)	Current (A)	Speed (RPM)	Air Flow (m³/h)	Air Pressure (Pa)	Noise [dB(A)]	Curve
LWFD3G160-072SZ-01	310	80	0.26	1600	494	649	61	/

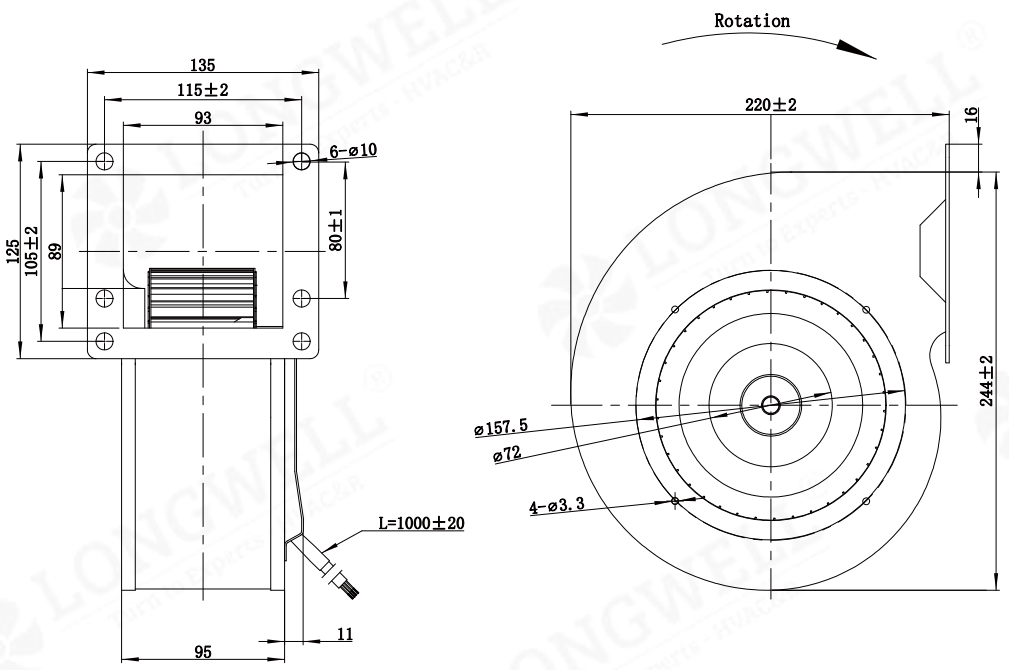

LWFD-160 Serise

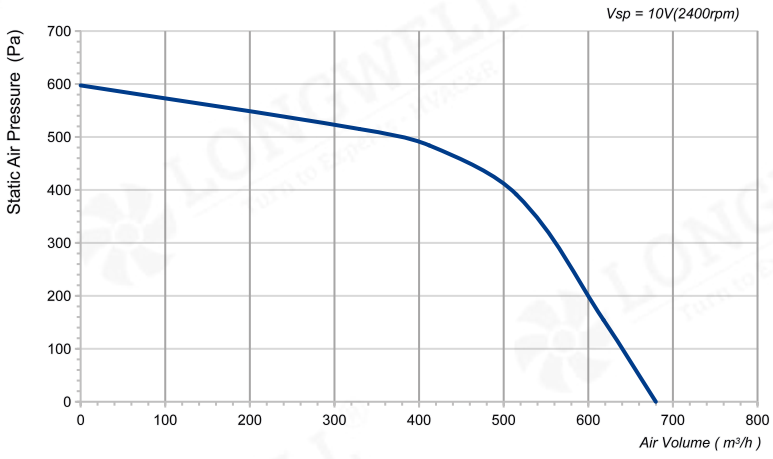




Product Characteristic


- Material: Plastic PA66
- Bearing: Maintenance-free ball bearings
- Mode of Operation: S1
- Type of Protection: IP54
- Insulation Class: B
- Operation Temperature: -30℃～+60℃

Technical Specifications

Model	Voltage (V)	Power (W)	Current (A)	Speed (RPM)	Air Flow (m³/h)	Air Pressure (Pa)	Noise [dB(A)]	Curve
LWFD3G160-092SZ-01	310	220	0.71	2400	680	597	66	/

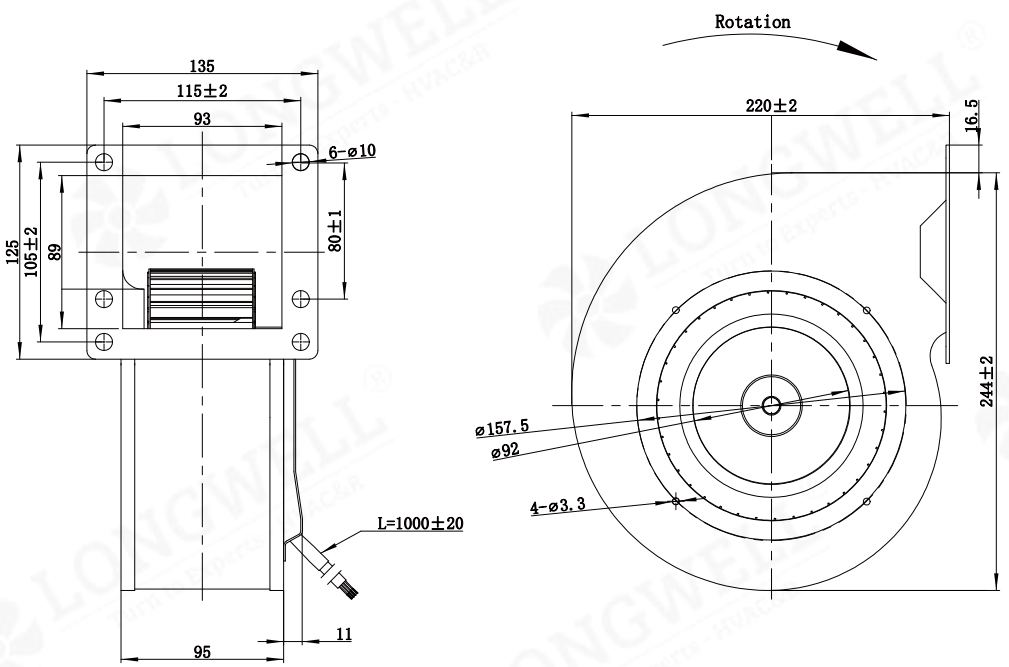

LWFD-160 Serise

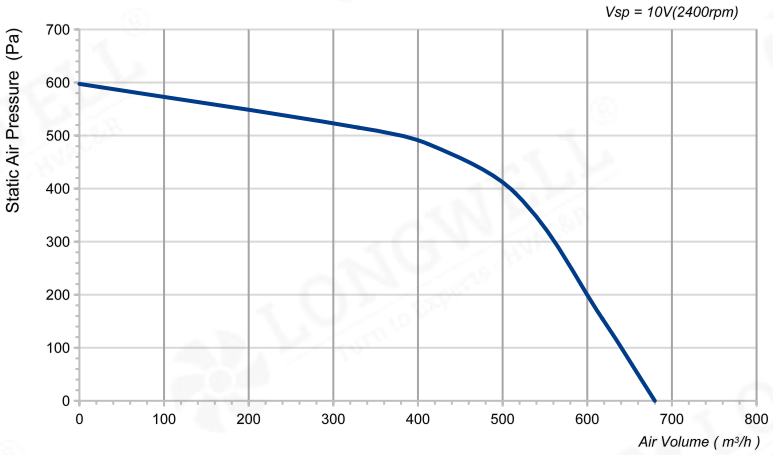



Product Characteristic

- Material: Plastic PA66
- Bearing: Maintenance-free ball bearings
- Mode of Operation: S1
- Type of Protection: IP54
- Insulation Class: B
- Operation Temperature: -30℃～+60℃

Technical Specifications

Model	Voltage (V)	Power (W)	Current (A)	Speed (RPM)	Air Flow (m³/h)	Air Pressure (Pa)	Noise [dB(A)]	Curve
LWFD3G160-092SZ-02	310	220	0.71	2400	680	597	66	/

