
LWAD-250 Serise



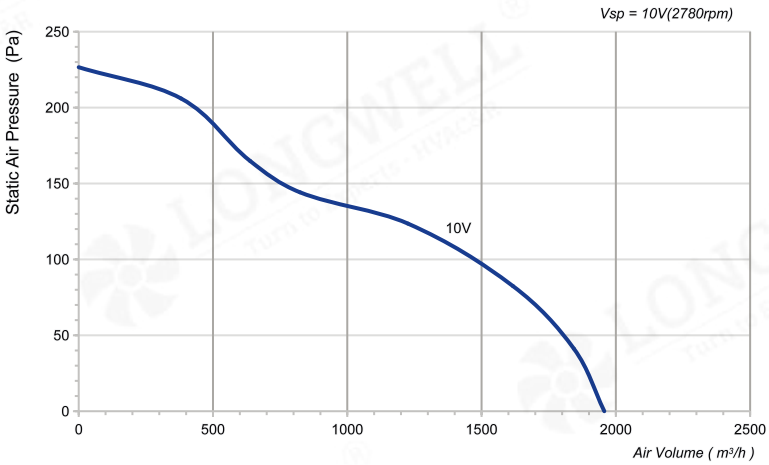



Product Characteristic

- Impeller Material : Metal sheet
- Protection Class: IP44
- Insulation Class: B
- Operation Temperature: -25℃～+60℃
- Motor Type: Brushless DC external rotor motor
- Technical Feature: Control input 0-10VDC/PWM,Tach output,Locked-Rotor protection,Reverse Polarity, Over-voltage Protection,Soft Start Protection

Technical Specifications

Model	Voltage (V)	Frequency (Hz)	Current (A)	Power [W(@0Pa)]	Speed (RPM)	Air Volume (m³/h)	Air Pressure (Pa)	Noise [dB(A)]
LWAD3G250MS-7MKB-01	24	50/60	4.4	105	2780	1957	227	69
LWAD3G250HS-7MKB-02	48	50/60	2.2	105	2780	1957	227	69

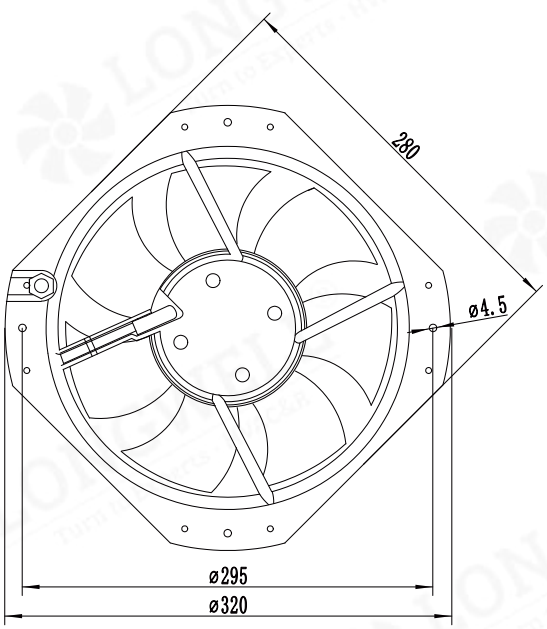

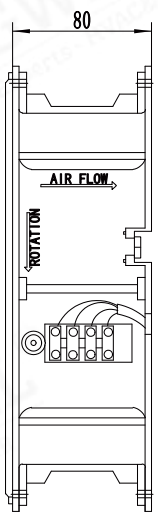

Ningbo Longwell Electric Technology Co., Ltd
https://www.longwellfans.com Email:sales@zjlongwell.com

LWAD-250 Serise




Product Characteristic


- Impeller Material : Metal sheet
- Protection Class: IP44
- Insulation Class: B
- Operation Temperature: -25℃～+60℃
- Motor Type: Brushless DC external rotor motor
- Technical Feature: Control input 0-10VDC/PWM,Tach output,Locked-Rotor protection,Reverse Polarity, Over-voltage Protection,Soft Start Protection

Technical Specifications


Model	Voltage (V)	Frequency (Hz)	Current (A)	Power [W(@0Pa)]	Speed (RPM)	Air Volume (m³/h)	Air Pressure (Pa)	Noise [dB(A)]
LWAD3G250ZS-7MNW-03	310	50/60	0.44	135	3150	1751	288	69
LWAD3G250ZB-7MNW-04	310	50/60	0.44	135	3150	1751	288	69
LWAD3G250ZS-7MEW-05	310	50/60	0.44	135	3150	1751	288	69
LWAD3G250ZB-7MEW-06	310	50/60	0.44	135	3150	1751	288	69
LWAD3G250ZS-7MKW-07	310	50/60	0.44	135	3150	1751	288	69
LWAD3G250ZB-7MKW-08	310	50/60	0.44	135	3150	1751	288	69

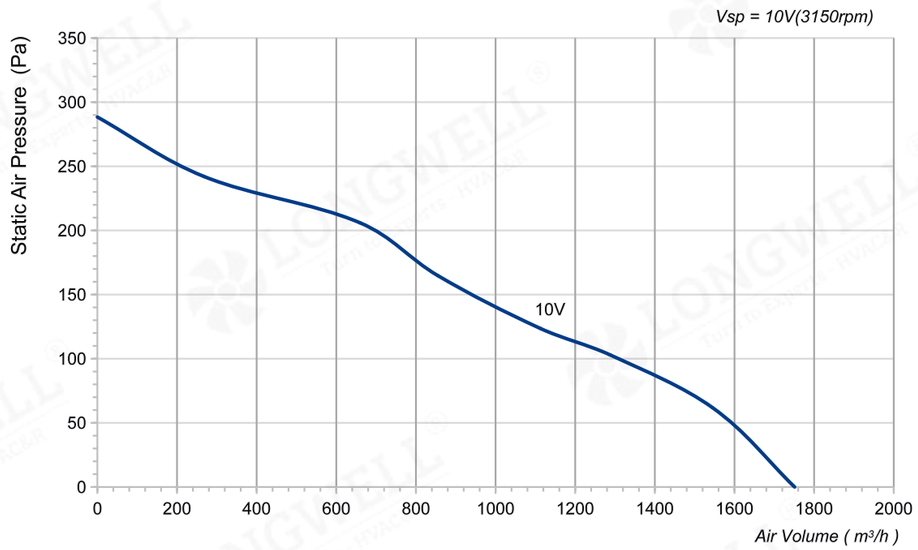


LWAD3G250ZS-7MNW-03(Suction)

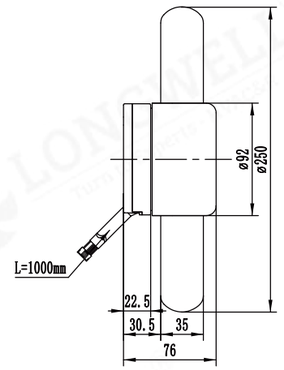


LWAD3G250ZB-7MNW-04(Blowing)

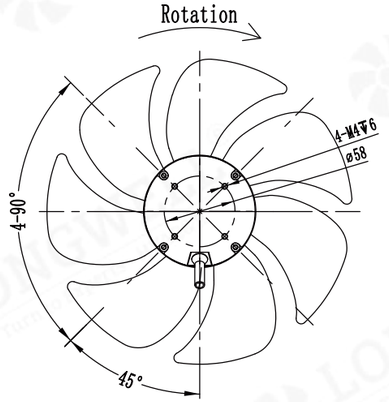


LWAD3G250ZS-7MEW-05(Suction)

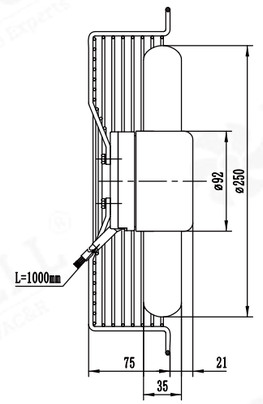

LWAD3G250ZB-7MEW-06(Blowing)

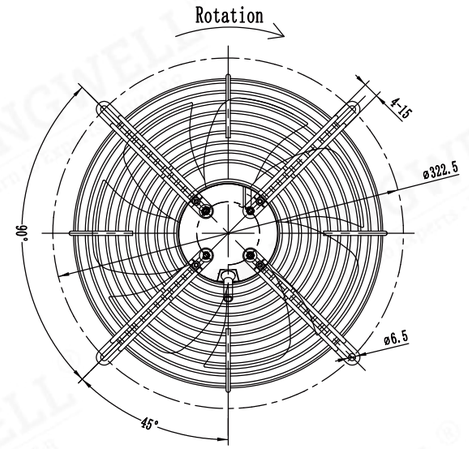

LWAD3G250ZS-7MKW-07(Suction)

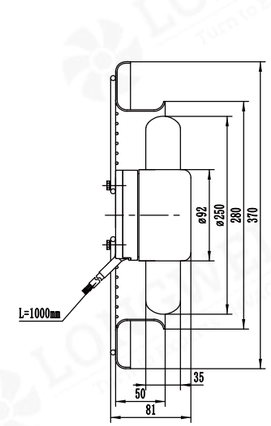

LWAD3G250ZB-7MKW-08(Blowing)

