
LWBD-280 Series



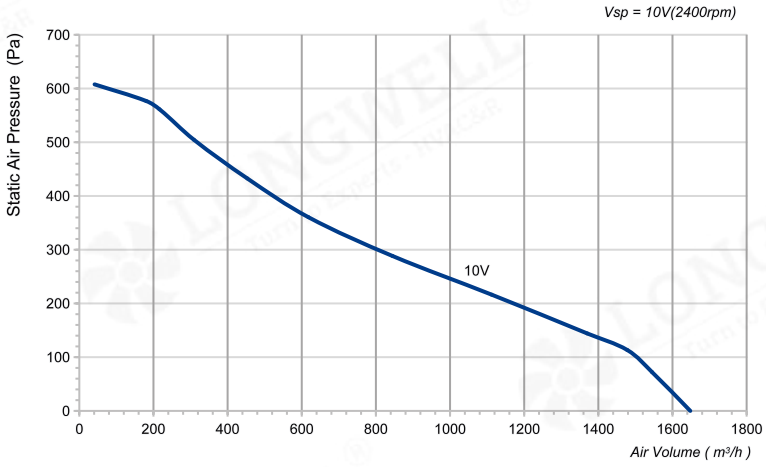


Product Characteristic

• Impeller Material:	Sheet Galvanized	• Motor Type:	BLDC
• Direction of Rotation:	Clockwise,seen on rotor	• Mode of Operation:	S1
• Protection Class:	IP42	• Insulation Class:	F
• Mounting Position:	Horizontal or Vertical	• Operation Temperature:	-25℃～+60℃
• Bearing:	Maintenance-free ball bearings	• Technical Features:	Control input 0-10VDC/PWM


• Protection: Tach output,Locked-Rotor protection Reverse Polarity,Over-voltage protection,Soft Start

Technical Specifications

Model	Voltage (V)	Current (A)	Rated Power (W)	Speed (RPM)	Air Volume (m³/h)	Static Pressure (Pa)	Noise [dB(A)]
LWBD3G280-092NH-04	48	2.8	130	2400	1648	608	72

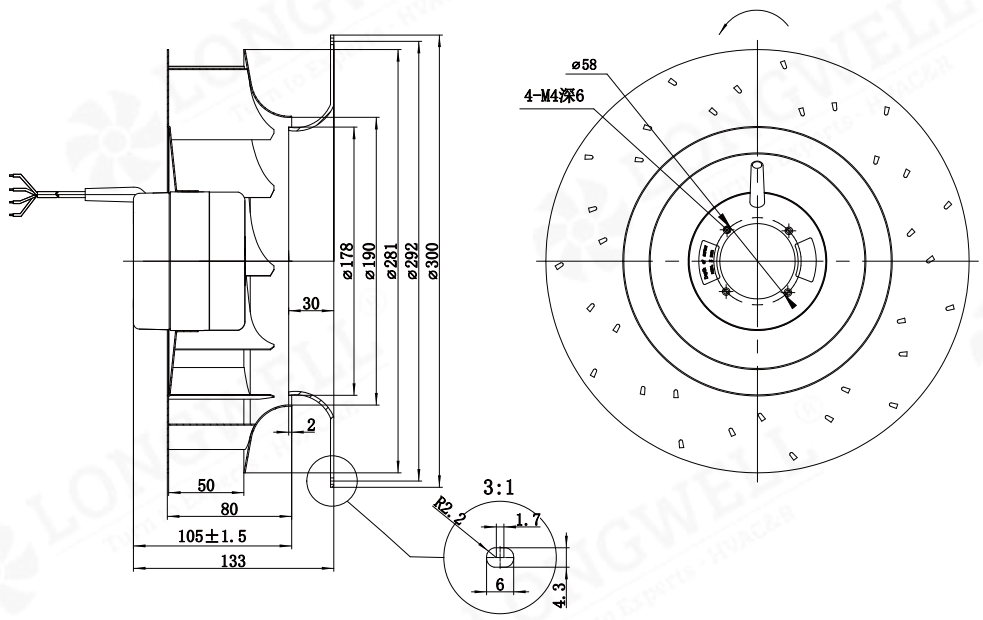

LWBD-280 Series

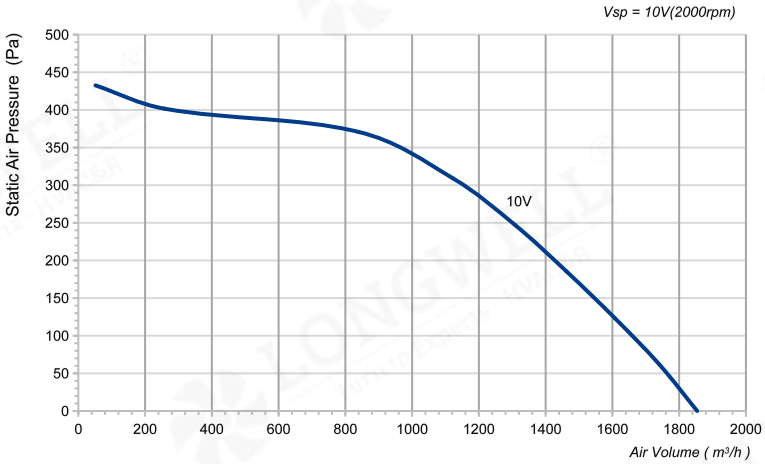



Product Characteristic

- Impeller Material: Sheet Galvanized
- Motor Type: BLDC
- Direction of Rotation: Clockwise,seen on rotor
- Mode of Operation: S1
- Protection Class: IP42
- Insulation Class: F
- Mounting Position: Horizontal or Vertical
- Operation Temperature: -25℃～+60℃
- Bearing: Maintenance-free ball bearings
- Technical Features: Control input 0-10VDC/PWM
- Protection: Tach output,Locked-Rotor protection Reverse Polarity,Over-voltage protection,Soft Start

Technical Specifications

Model	Voltage (V)	Current (A)	Rated Power (W)	Speed (RPM)	Air Volume (m^3/h)	Static Pressure (Pa)	Noise [dB(A)]
LWBD3G280-092NH-05	48	2.9	135	2000	1854	433	69

