
LWFE-160 Serise



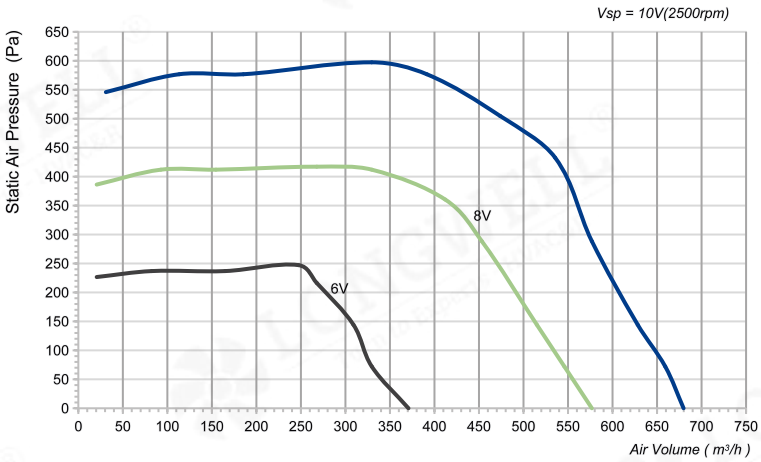


Product Characteristic


• Material:	Galvanised sheet steel	• Mode of Operation:	S1
• Insulation Class:	F	• Type of Protection:	IP54
• Bearing:	Maintenance-free ball bearings	• Operation Temperature:	-30℃～+60℃

Technical Specifications

Model	Voltage (V)	Frequency (Hz)	Power (W)	Current (A)	Speed (RPM)	Air Flow (m³/h)	Air Pressure (Pa)	Noise [dB(A)]	Curve
LWFE3G160-092SS-01	230	50/60	240	1.8	2500	680	556	72	/

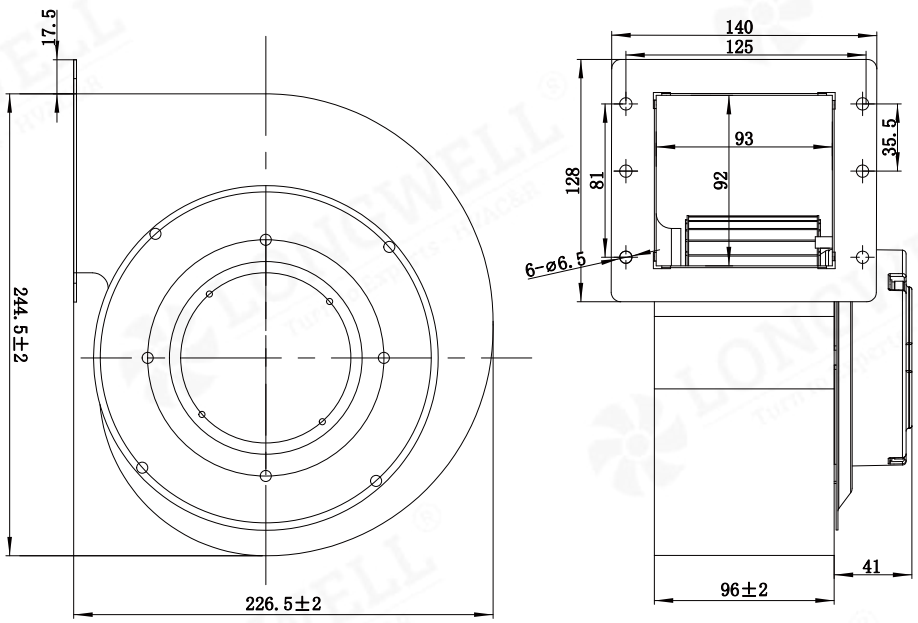

LWFE-160 Serise

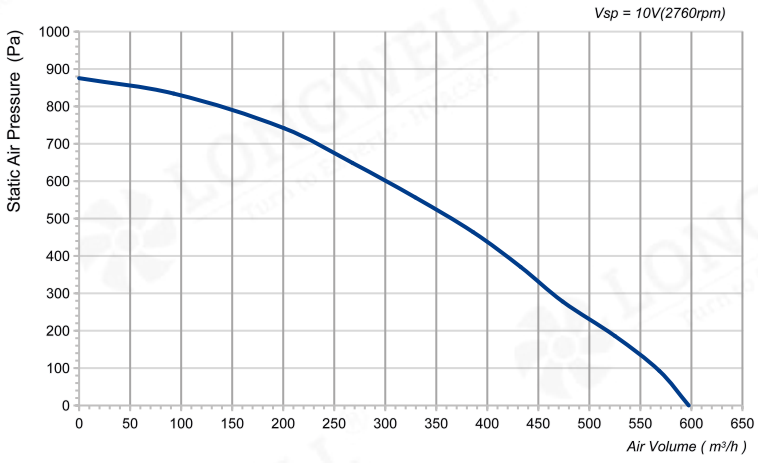




Product Characteristic


- Material: Galvanised sheet steel
- Insulation Class: B
- Bearing: Maintenance-free ball bearings
- Mode of Operation: S1
- Type of Protection: IP55
- Operation Temperature: -30℃～+60℃

Technical Specifications

Model	Voltage (V)	Frequency (Hz)	Power (W)	Current (A)	Speed (RPM)	Air Flow (m³/h)	Air Pressure (Pa)	Noise [dB(A)]	Curve
LWFE3G160-072SS-03	230	50/60	115	0.9	2760	597	876	67	/

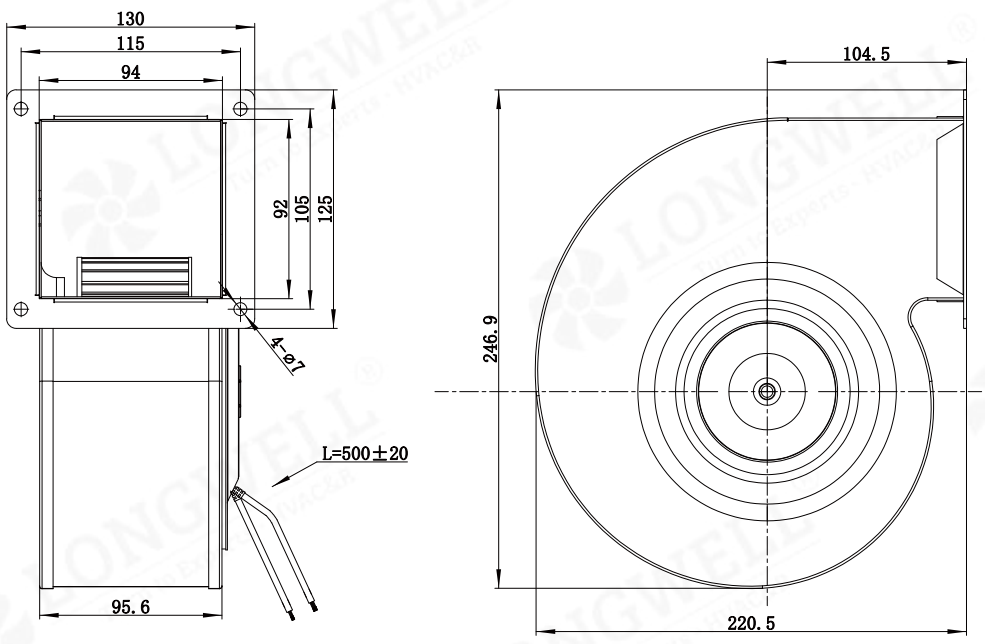

LWFE-160 Serise

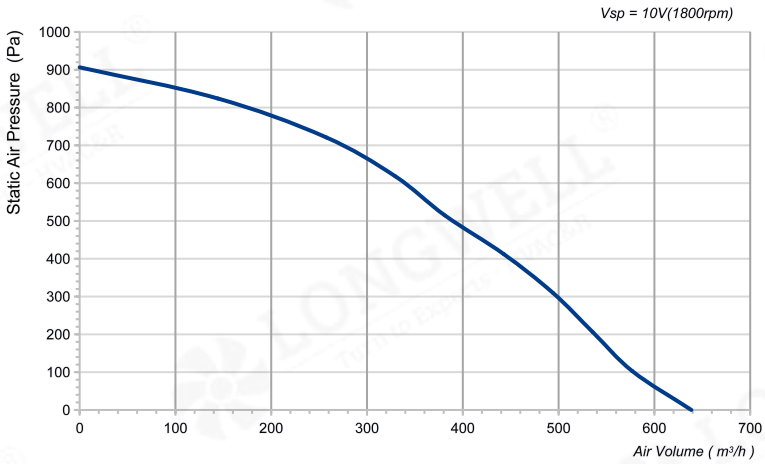




Product Characteristic


- Material: PA6+GF
- Insulation Class: B
- Bearing: Maintenance-free ball bearings
- Mode of Operation: S1
- Type of Protection: IP55
- Operation Temperature: -30℃～+60℃

Technical Specifications

Model	Voltage (V)	Frequency (Hz)	Power (W)	Current (A)	Speed (RPM)	Air Flow (m³/h)	Air Pressure (Pa)	Noise [dB(A)]	Curve
LWFE3G160-072SS-06	230	50/60	115	0.85	1800	639	906	64	/

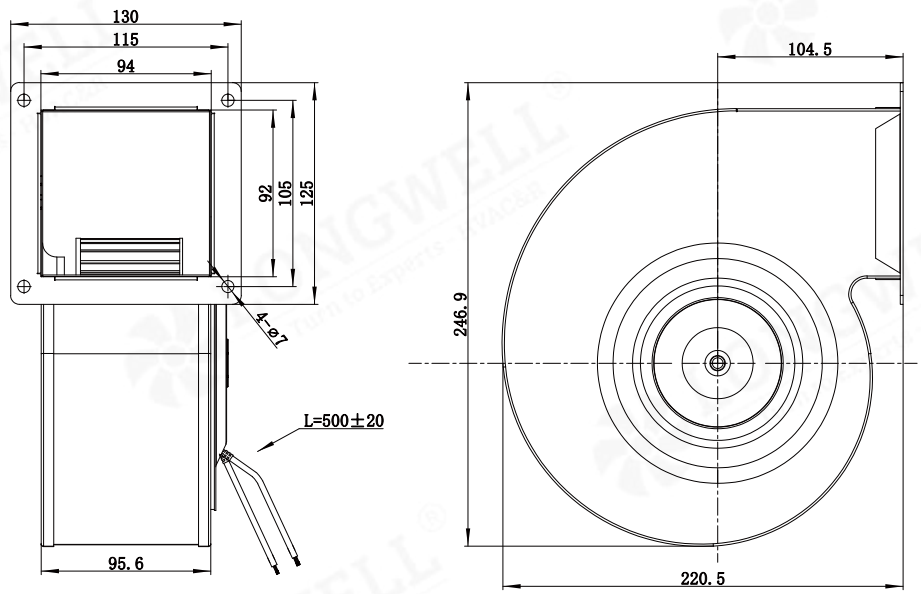

LWFE-160 Serise

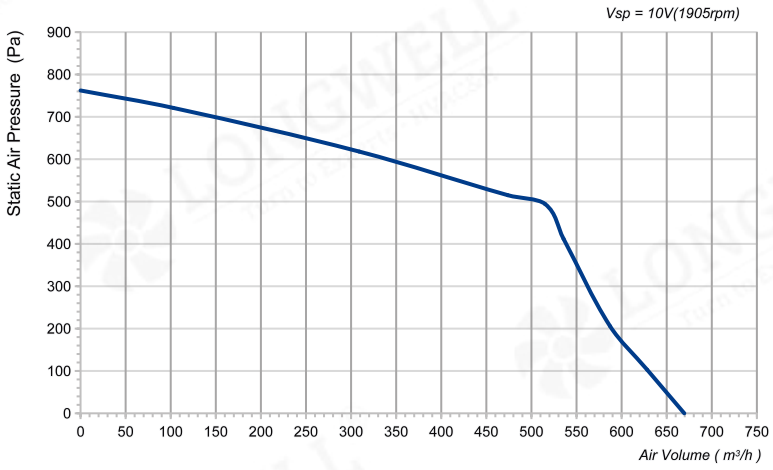





Product Characteristic

- Material: Galvanised sheet steel
- Insulation Class: F
- Bearing: Maintenance-free ball bearings
- Mode of Operation: S1
- Type of Protection: IP54
- Operation Temperature: -30℃～+60℃


Technical Specifications

Model	Voltage (V)	Frequency (Hz)	Power (W)	Current (A)	Speed (RPM)	Air Flow (m³/h)	Air Pressure (Pa)	Noise [dB(A)]	Curve
LWFE3G160-092SS-02	230	50/60	143	0.65	1905	666	773	/	/

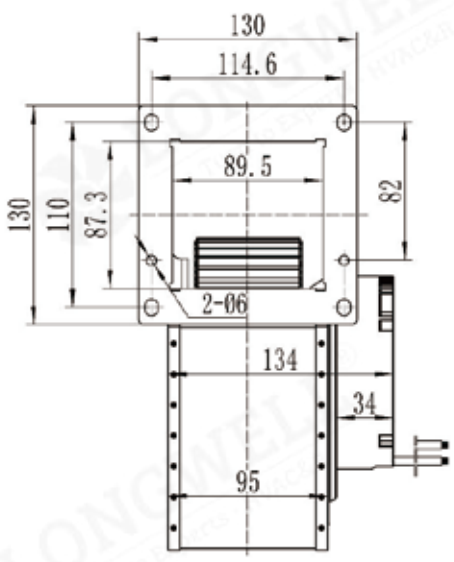

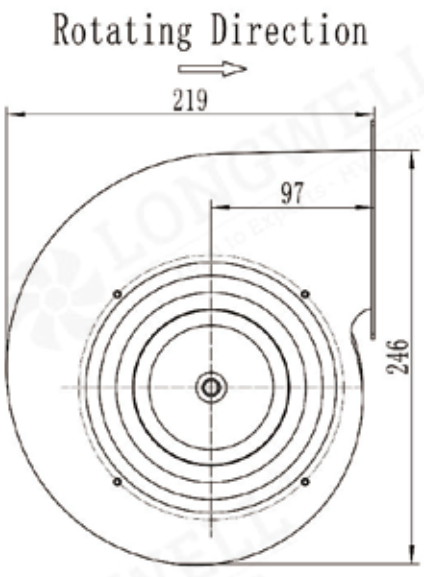

LWFE-160 Serise

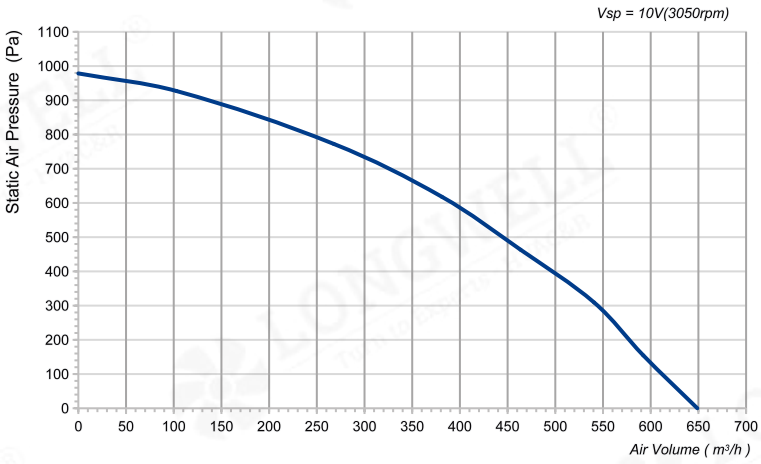





Product Characteristic

- Material: Galvanised sheet steel
- Insulation Class: B
- Bearing: Maintenance-free ball bearings
- Mode of Operation: S1
- Type of Protection: IP55
- Operation Temperature: -30℃～+60℃


Technical Specifications

Model	Voltage (V)	Frequency (Hz)	Power (W)	Current (A)	Speed (RPM)	Air Flow (m³/h)	Air Pressure (Pa)	Noise [dB(A)]	Curve
LWFE3G160-072SS-04	230	50/60	155	1.1	3050	649	989	68	/

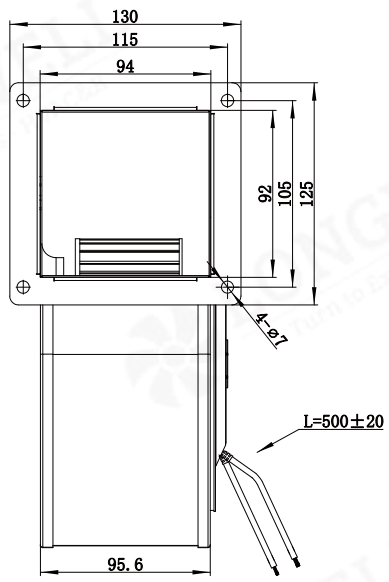

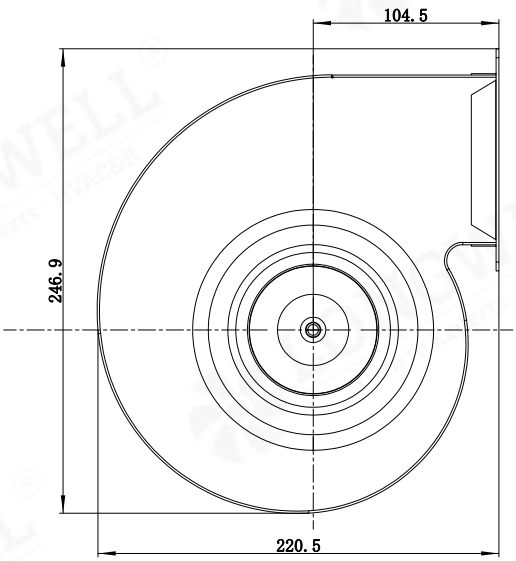

LWFE-160 Serise

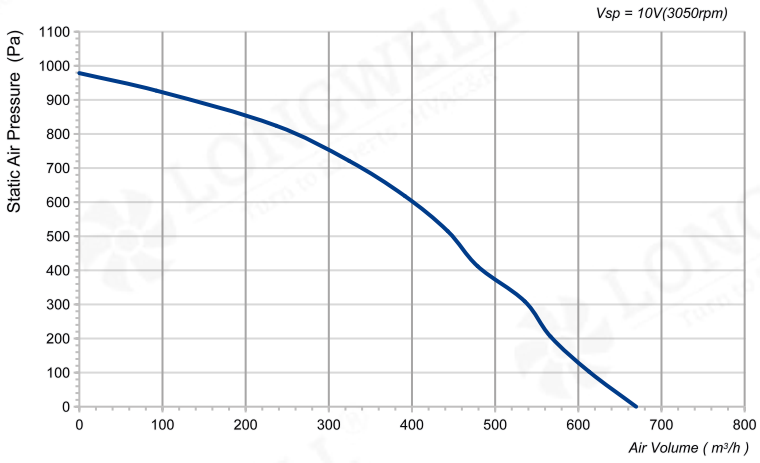





Product Characteristic

- Material: PA6+GF
- Insulation Class: B
- Bearing: Maintenance-free ball bearings
- Mode of Operation: S1
- Type of Protection: IP55
- Operation Temperature: -30℃～+60℃


Technical Specifications

Model	Voltage (V)	Frequency (Hz)	Power (W)	Current (A)	Speed (RPM)	Air Flow (m³/h)	Air Pressure (Pa)	Noise [dB(A)]	Curve
LWFE3G160-072SS-07	230	50/60	170	1.2	3050	670	979	67	/

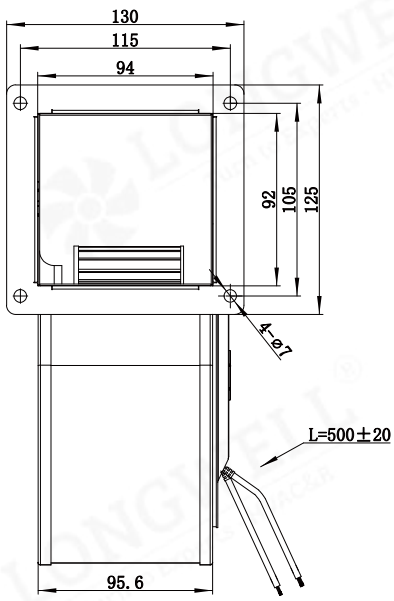

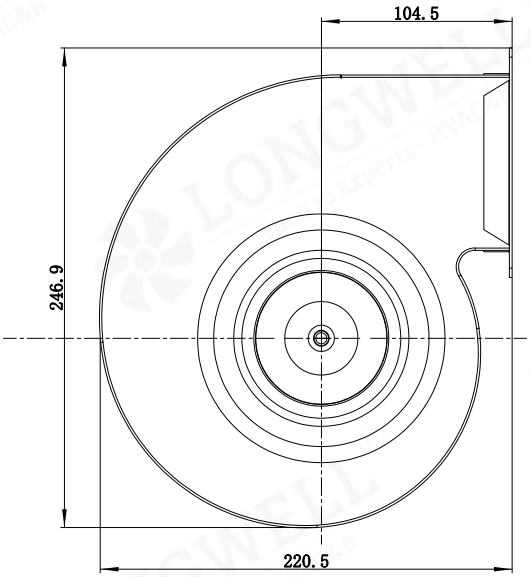

LWFE-160 Serise

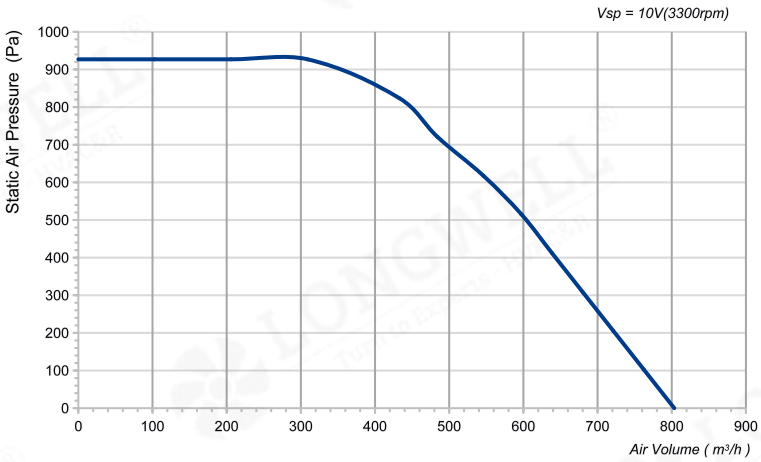




Product Characteristic


- Material: Galvanised sheet steel
- Insulation Class: B
- Bearing: Maintenance-free ball bearings
- Mode of Operation: S1
- Type of Protection: IP55
- Operation Temperature: -30℃～+60℃

Technical Specifications

Model	Voltage (V)	Frequency (Hz)	Power (W)	Current (A)	Speed (RPM)	Air Flow (m³/h)	Air Pressure (Pa)	Noise [dB(A)]	Curve
LWFE3G160-092SS-05	230	50/60	230	1.65	3300	803	927	75	/

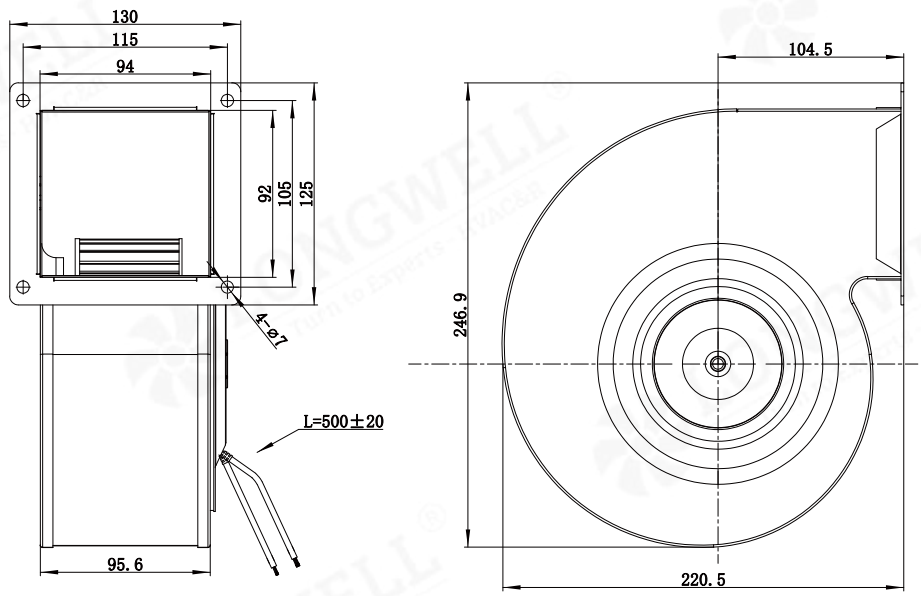

LWFE-160 Serise

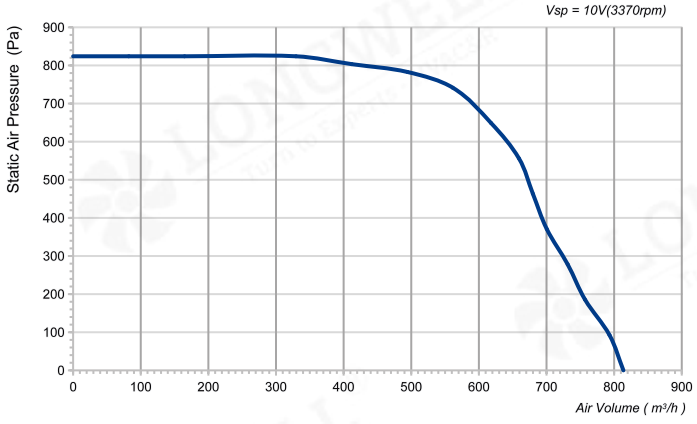



Product Characteristic

- Material: PA6+GF
- Insulation Class: B
- Bearing: Maintenance-free ball bearings
- Mode of Operation: S1
- Type of Protection: IP55
- Operation Temperature: -30℃～+60℃

Technical Specifications

Model	Voltage (V)	Frequency (Hz)	Power (W)	Current (A)	Speed (RPM)	Air Flow (m³/h)	Air Pressure (Pa)	Noise [dB(A)]	Curve
LWFE3G160-092SS-08	230	50/60	230	1.65	3370	814	824	73	/

