
LWFE-160 Serise



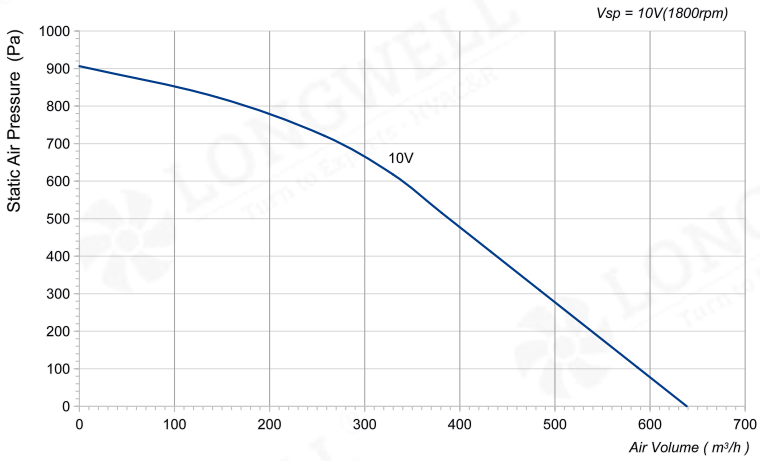



Product Characteristic

- Material: Galvanised sheet steel
- Bearing: Maintenance-free ball bearings
- Mode of Operation: S1
- Type of Protection: IP55
- Insulation Class: B
- Operation Temperature: -30℃～+60℃


Technical Specifications

Model	Voltage (V)	Frequency (Hz)	Power (W)	Current (A)	Speed (RPM)	Air Flow (m³/h)	Air Pressure (Pa)	Noise [dB(A)]	Curve
LWFE3G160-072NS-01	230	50/60	115	0.85	1800	639	906	64	/

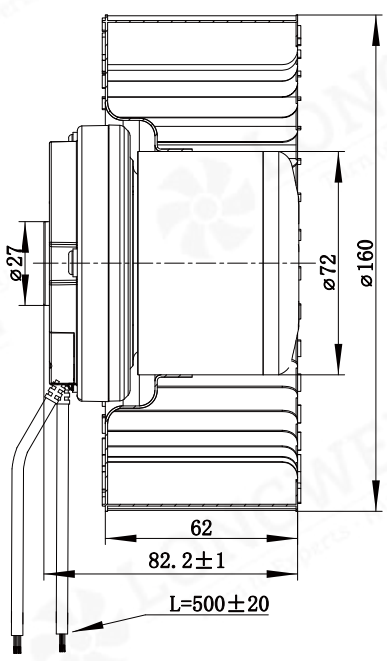

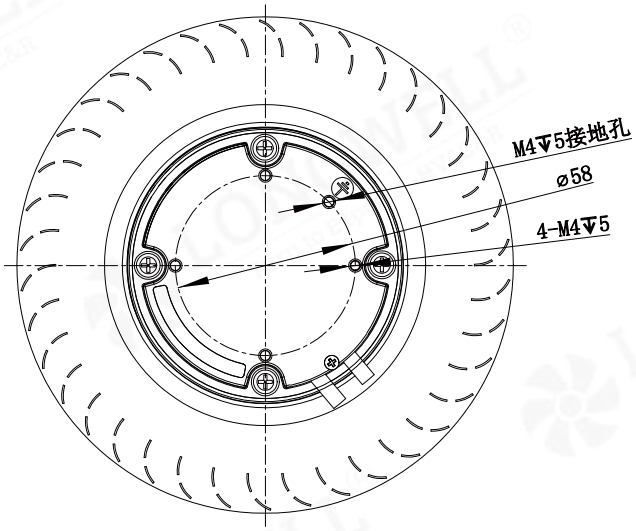

LWFE-160 Serise

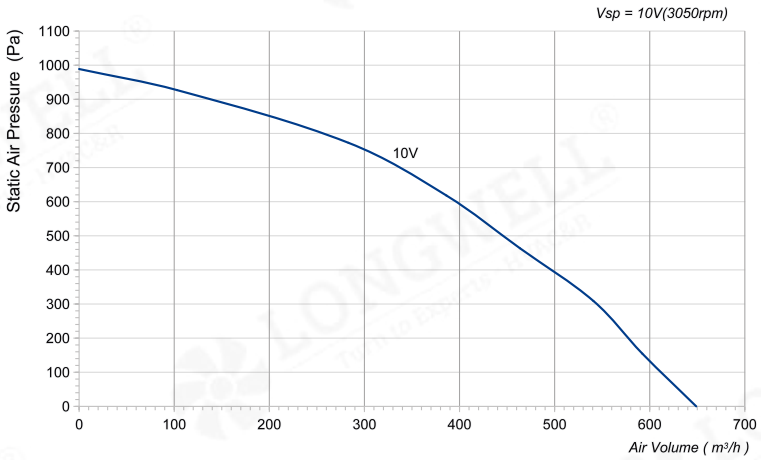





Product Characteristic

- Material: Galvanised sheet steel
- Bearing: Maintenance-free ball bearings
- Mode of Operation: S1
- Type of Protection: IP55
- Insulation Class: B
- Operation Temperature: -30℃～+60℃


Technical Specifications

Model	Voltage (V)	Frequency (Hz)	Power (W)	Current (A)	Speed (RPM)	Air Flow (m³/h)	Air Pressure (Pa)	Noise [dB(A)]	Curve
LWFE3G160-072NS-02	230	50/60	155	1.1	3050	649	989	68	/

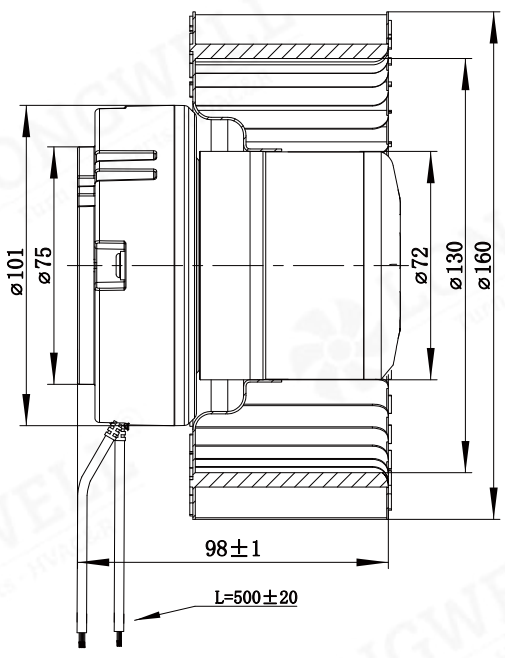

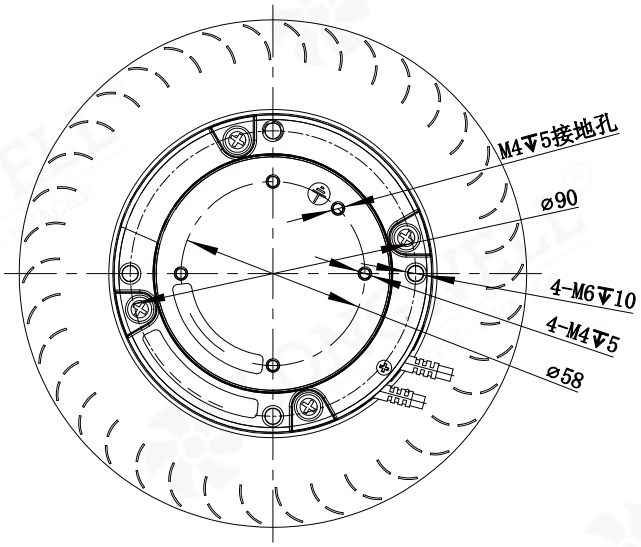

LWFE-160 Serise

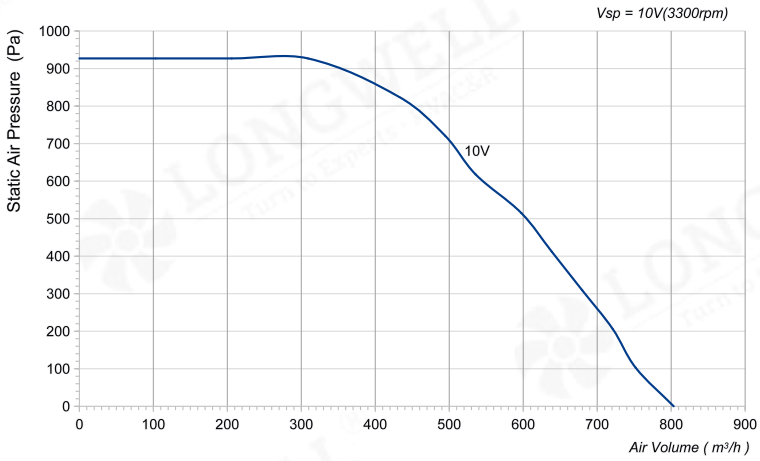



Product Characteristic

- Material: Galvanised sheet steel
- Bearing: Maintenance-free ball bearings
- Mode of Operation: S1
- Type of Protection: IP55
- Insulation Class: B
- Operation Temperature: -30℃～+60℃

Technical Specifications

Model	Voltage (V)	Frequency (Hz)	Power (W)	Current (A)	Speed (RPM)	Air Flow (m³/h)	Air Pressure (Pa)	Noise [dB(A)]	Curve
LWFE3G160-092NS-03	230	50/60	230	1.65	3300	803	927	75	/

