
LWFE-200 Serise



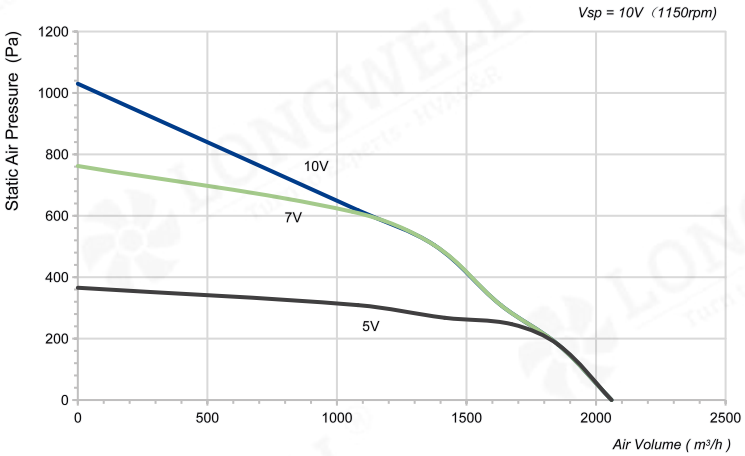


Product Characteristic

- Material : Metal
- Type of Protection: IP44
- Bearing: Maintenance-free ball bearings
- Insulation Class: B
- Mode of Operation: S1
- Operation Temperature: -20℃～+60℃


CE RoHS BSCI ISO EAC UL LVD

Technical Specifications

Model	Voltage (V)	Frequency (Hz)	Power (W)	Current (A)	Speed (RPM)	Air Flow (m³/h)	Air Pressure (Pa)	Noise [dB(A)]	Curve
LWFE3G200-102DS-01	230	50/60	300	1.36	1150	2060	1030	64	/

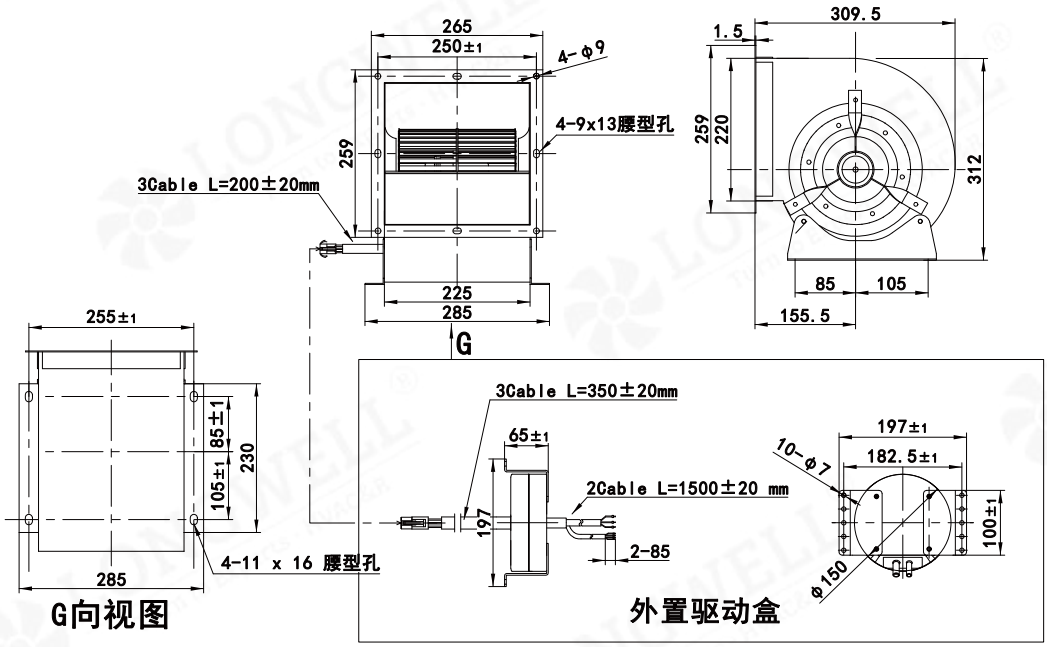

LWFE-200 Serise

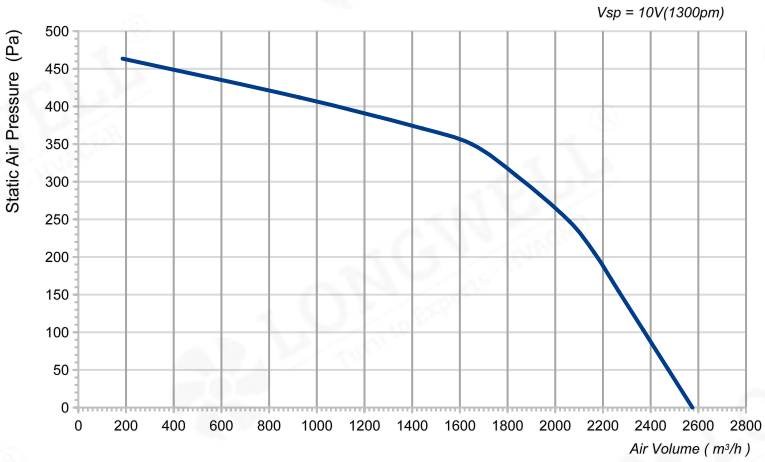



Product Characteristic

- Material : Metal
- Bearing: Maintenance-free ball bearings
- Mode of Operation: S1
- Type of Protection: IP54
- Insulation Class: F
- Operation Temperature: -30℃～+60℃

CE RoHS BSCI ISO EAC UL LVD

Technical Specifications

Model	Voltage (V)	Frequency (Hz)	Power (W)	Current (A)	Speed (RPM)	Air Flow (m³/h)	Air Pressure (Pa)	Noise [dB(A)]	Curve
LWFE3G200-102DS-02	230	50/60	390	1.55	1300	2575	464	66	/

