Ningbo Longwell Electric Technology Co., Ltd
https://www.longwellfans.com Email:sales@zjlongwell.com

LWBE-250 Serise




Product Characteristic


- Impeller Material: PA6+GF
- Supply Voltage: 230V,50/60Hz
- Mode of Operation: S1
- Protection Class: IP55
- Insulation Class: F
- Operation Temperature: -25℃～+60℃
- Technical Feature: Control input 0-10VDC/PWM,Tach output,Locked-Rotor protection,Reverse Polarity Over-voltage protection,Soft Start Protection.

Technical Specifications


Model	Voltage (V)	Input Power (W)	Current (A)	Air Volume (m^3/h)	Static Pressure (Pa)	Speed (RPM)	Noise [dB(A)]
LWBE3G250-072PS-01	230	85	1.26	1185	618	1810	62

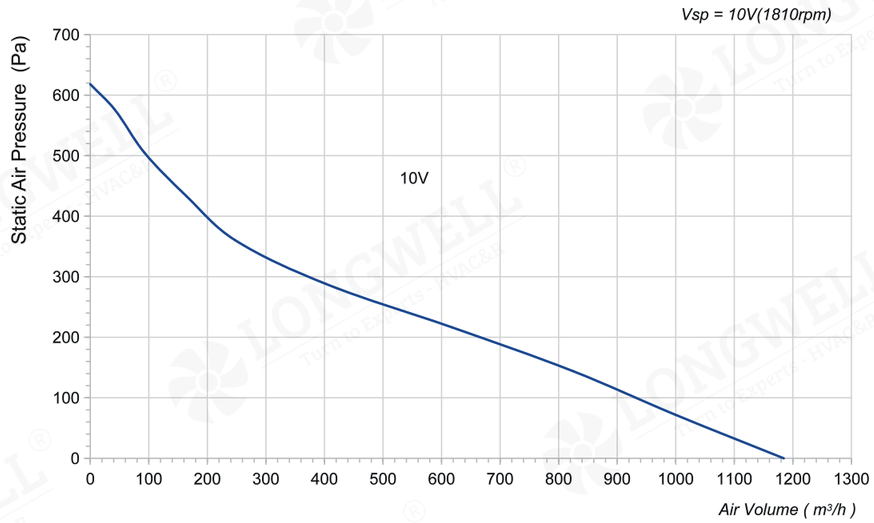

LWBE3G250-072NS-08 (without bracket)

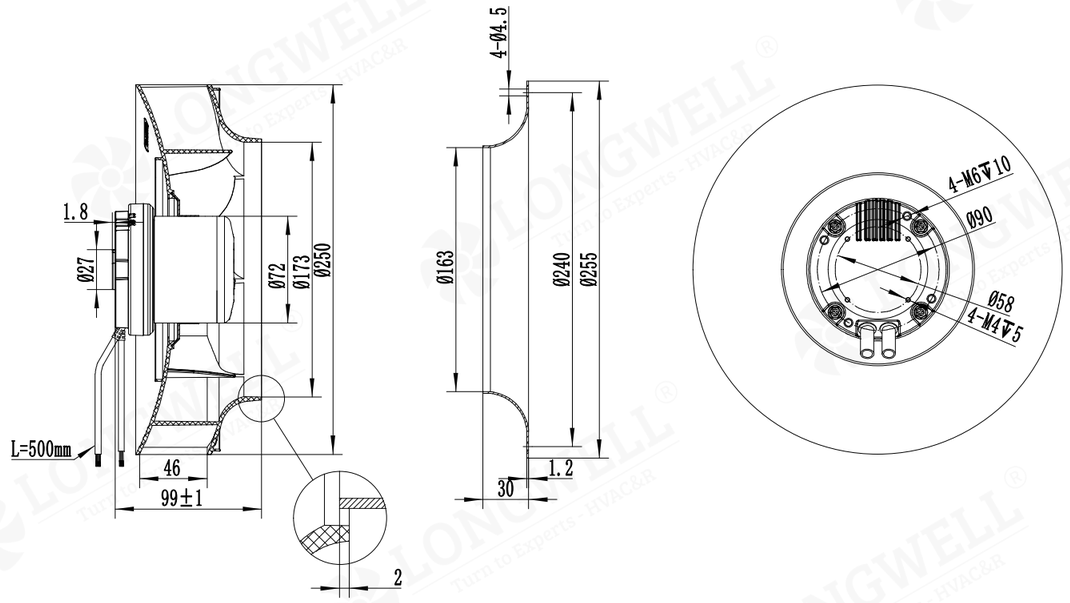

LWBE3G250-072PS-01 (with bracket)

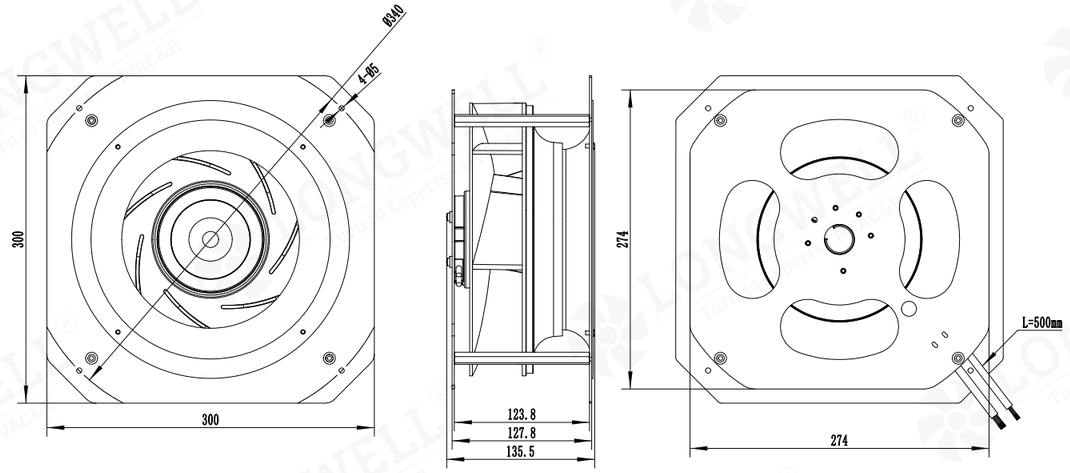

Ningbo Longwell Electric Technology Co., Ltd
https://www.longwellfans.com Email:sales@zjlongwell.com

LWBE-250 Serise




Product Characteristic


- Impeller Material: PA6+GF
- Supply Voltage: 230V,50/60Hz
- Mode of Operation: S1
- Protection Class: IP55
- Insulation Class: F
- Operation Temperature: -25℃～+60℃
- Technical Feature: Control input 0-10VDC/PWM,Tach output,Locked-Rotor protection,Reverse Polarity Over-voltage protection,Soft Start Protection.

Technical Specifications


Model	Voltage (V)	Input Power (W)	Current (A)	Air Volume (m^3/h)	Static Pressure (Pa)	Speed (RPM)	Noise [dB(A)]
LWBE3G250-072PS-02	230	115	0.9	1236	515	2180	62

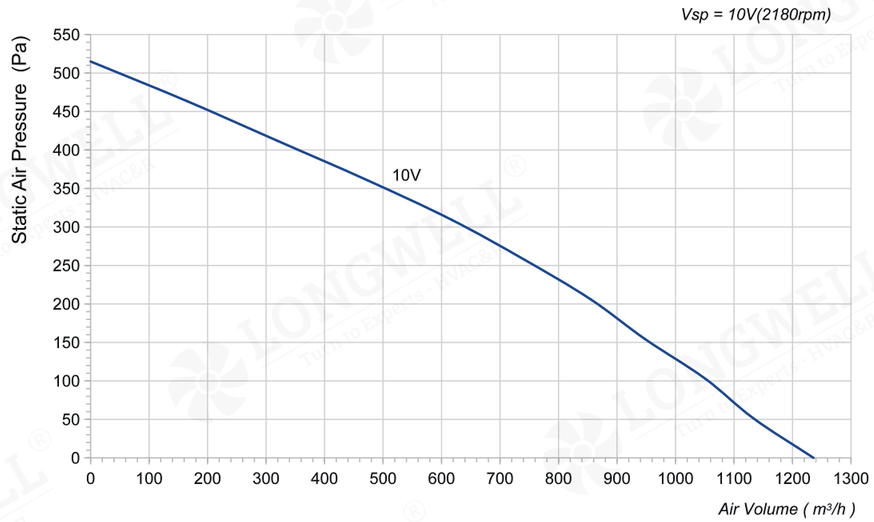

LWBE3G250-072NS-18 (without bracket)

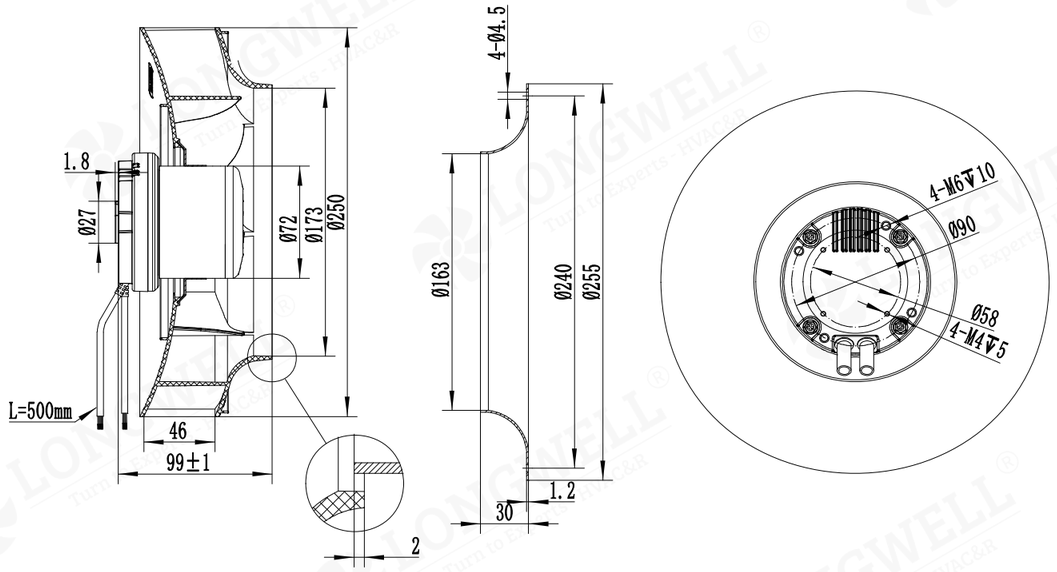

LWBE3G250-072PS-02 (with bracket)

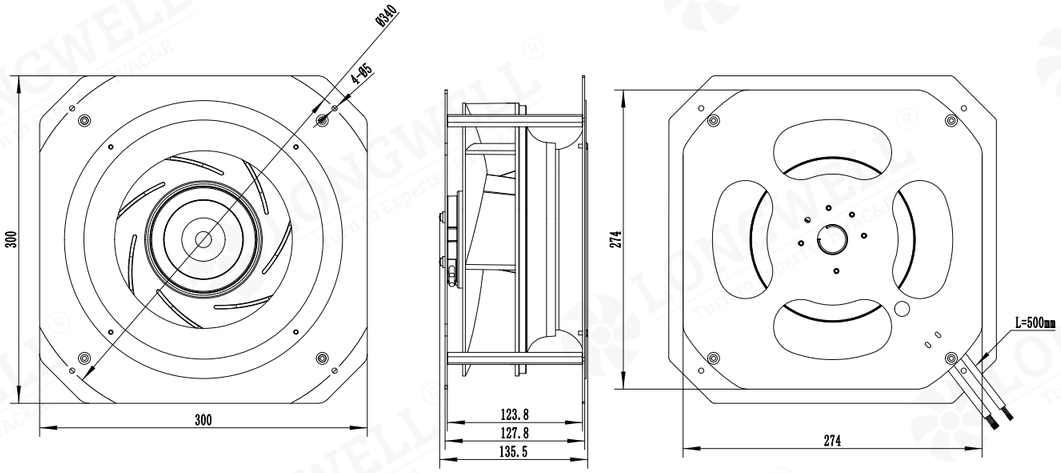

Ningbo Longwell Electric Technology Co., Ltd
https://www.longwellfans.com Email:sales@zjlongwell.com

LWBE-250 Serise




Product Characteristic


- Impeller Material: PA6+GF
- Supply Voltage: 230V,50/60Hz
- Mode of Operation: S1
- Protection Class: IP55
- Insulation Class: F
- Operation Temperature: -25℃～+60℃
- Technical Feature: Control input 0-10VDC/PWM,Tach output,Locked-Rotor protection,Reverse Polarity Over-voltage protection,Soft Start Protection.

Technical Specifications


Model	Voltage (V)	Input Power (W)	Current (A)	Air Volume (m^3/h)	Static Pressure (Pa)	Speed (RPM)	Noise [dB(A)]
LWBE3G250-072PS-04	230	169	1.27	1478	927	2570	71

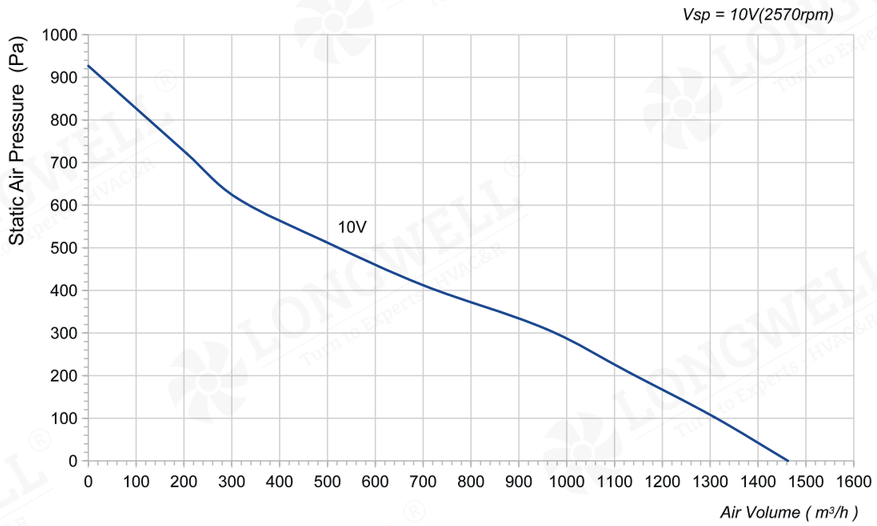

LWBE3G250-072NS-09 (without bracket)

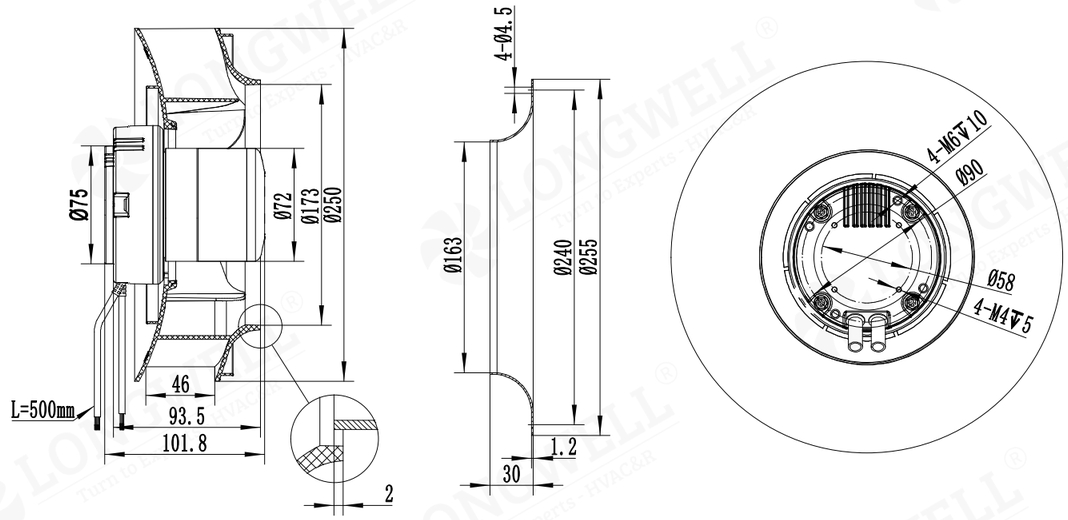

LWBE3G250-072PS-04 (with bracket)

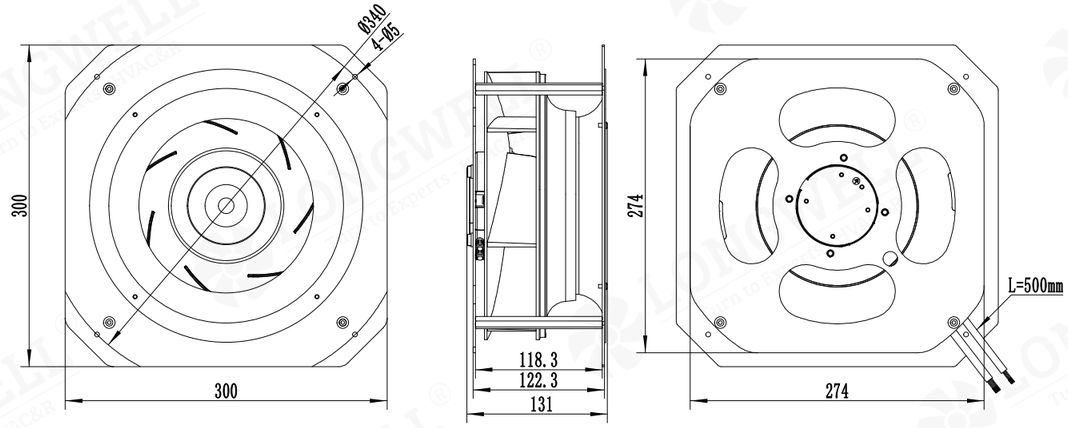

Ningbo Longwell Electric Technology Co., Ltd
https://www.longwellfans.com Email:sales@zjlongwell.com

LWBE-250 Serise




Product Characteristic


- Impeller Material: PA6+GF
- Supply Voltage: 230V,50/60Hz
- Mode of Operation: S1
- Protection Class: IP55
- Insulation Class: F
- Operation Temperature: -25℃～+60℃
- Technical Feature: Control input 0-10VDC/PWM,Tach output,Locked-Rotor protection,Reverse Polarity Over-voltage protection,Soft Start Protection.

Technical Specifications


Model	Voltage (V)	Input Power (W)	Current (A)	Air Volume (m^3/h)	Static Pressure (Pa)	Speed (RPM)	Noise [dB(A)]
LWBE3G250-092PS-05	230	230	1.65	1648	721	2700	71

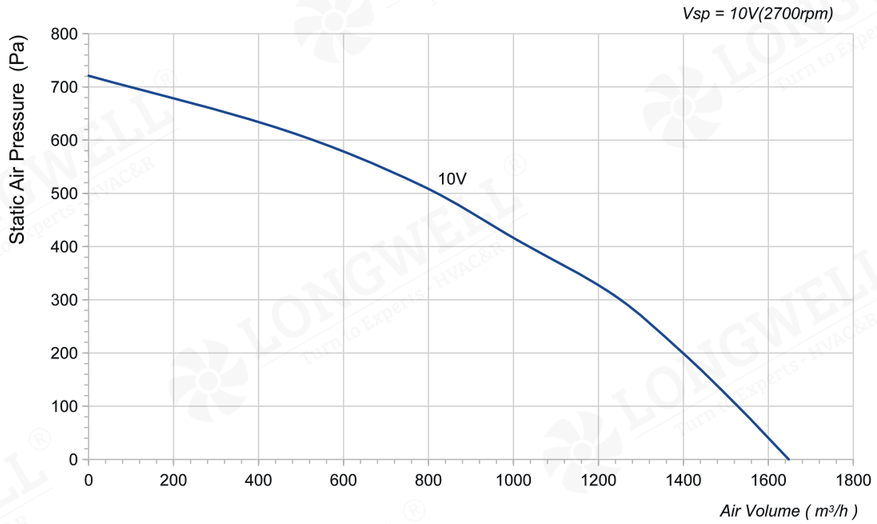

LWBE3G250-092NS-19 (without bracket)

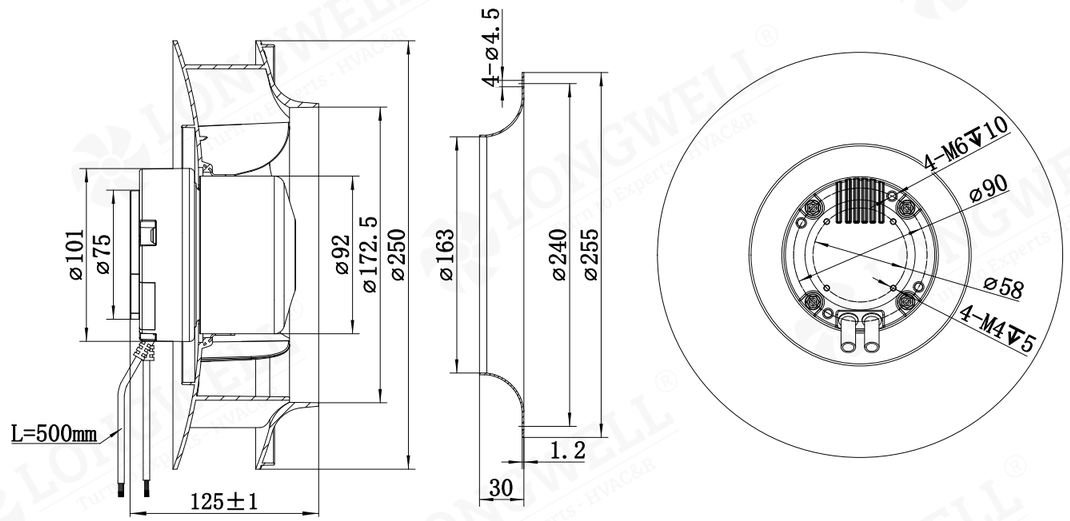

LWBE3G250-092PS-05 (with bracket)

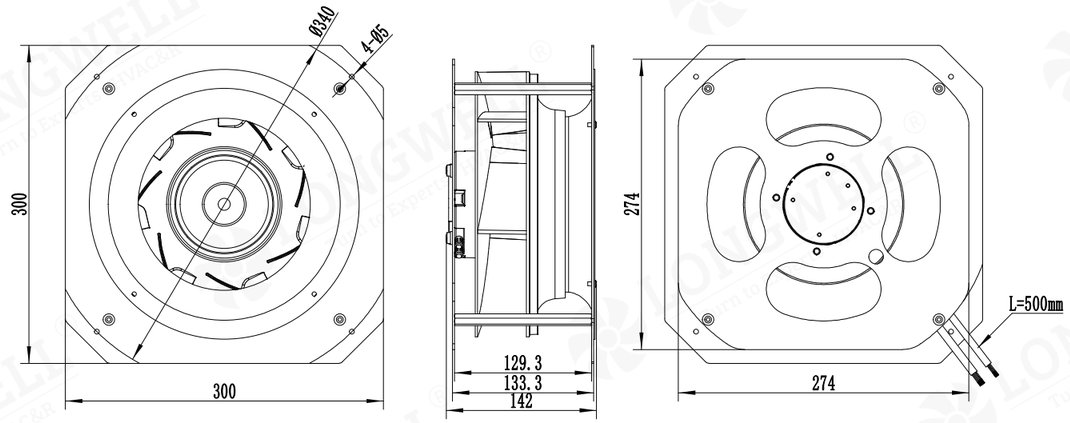

Ningbo Longwell Electric Technology Co., Ltd
https://www.longwellfans.com Email:sales@zjlongwell.com

LWBE-250 Serise




Product Characteristic


- Impeller Material: Aluminum Alloy
- Supply Voltage: 230V,50/60Hz
- Mode of Operation: S1
- Protection Class: IP55
- Insulation Class: F
- Operation Temperature: -25℃～+60℃
- Technical Feature: Control input 0-10VDC/PWM,Tach output,Locked-Rotor protection,Reverse Polarity Over-voltage protection,Soft Start Protection.

Technical Specifications


Model	Voltage (V)	Input Power (W)	Current (A)	Air Volume (m^3/h)	Static Pressure (Pa)	Speed (RPM)	Noise [dB(A)]
LWBE3G250-102PS-06	230	520	2.5	2472	1545	3650	85

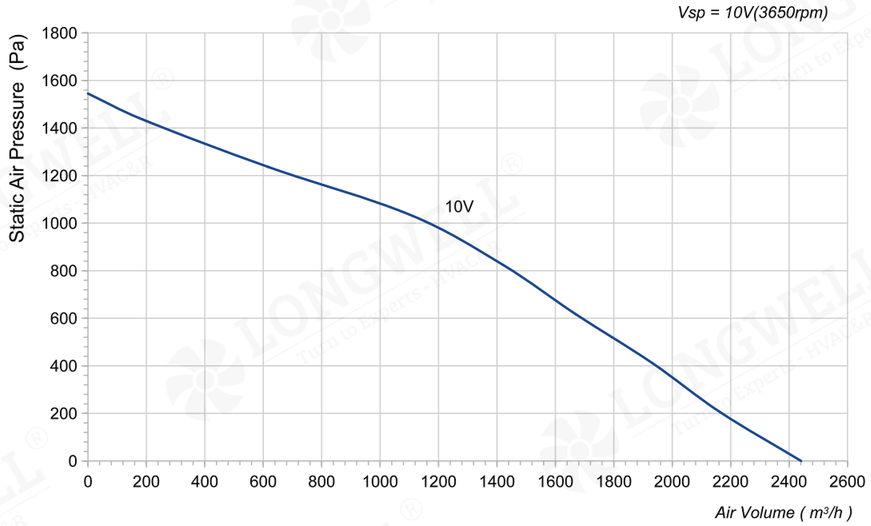

LWBE3G250-102NS-10 (without bracket)

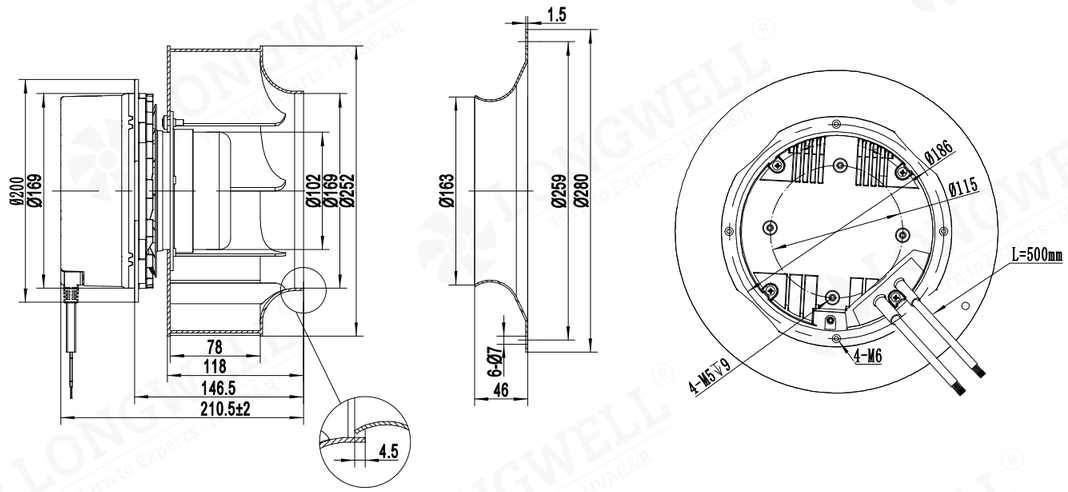

LWBE3G250-102PS-06 (with bracket)

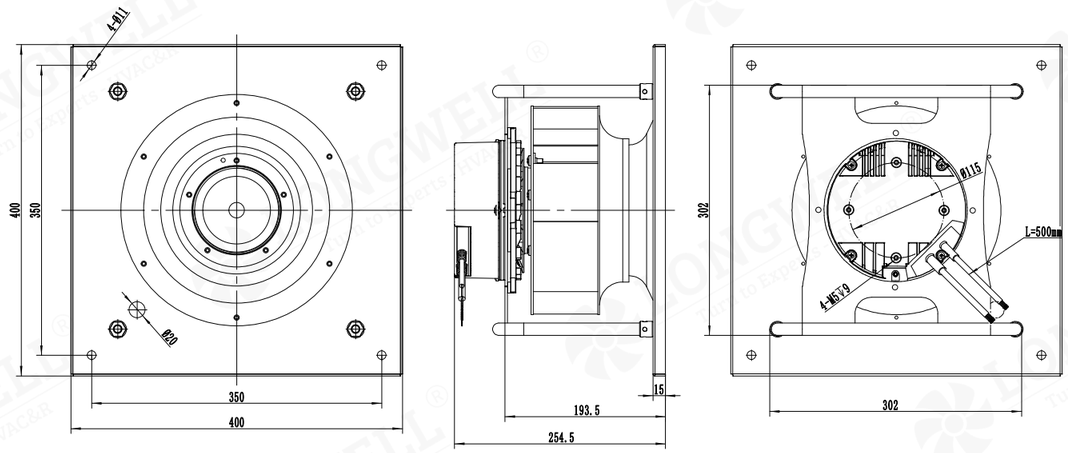

Ningbo Longwell Electric Technology Co., Ltd
https://www.longwellfans.com Email:sales@zjlongwell.com

LWBE-250 Serise




Product Characteristic


- Impeller Material: Aluminum Alloy
- Supply Voltage: 230V,50/60Hz
- Mode of Operation: S1
- Protection Class: IP55
- Insulation Class: F
- Operation Temperature: -25℃～+60℃
- Technical Feature: Control input 0-10VDC/PWM,Tach output,Locked-Rotor protection,Reverse Polarity Over-voltage protection,Soft Start Protection.

Technical Specifications


Model	Voltage (V)	Input Power (W)	Current (A)	Air Volume (m^3/h)	Static Pressure (Pa)	Speed (RPM)	Noise [dB(A)]
LWBE3G250-102PS-07	230	750	3.4	3039	1442	4100	93

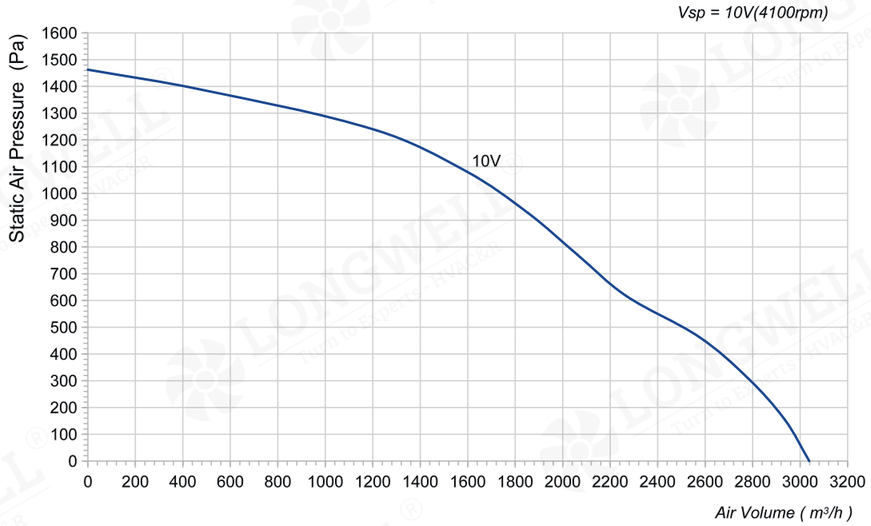

LWBE3G250-102NS-20 (without bracket)

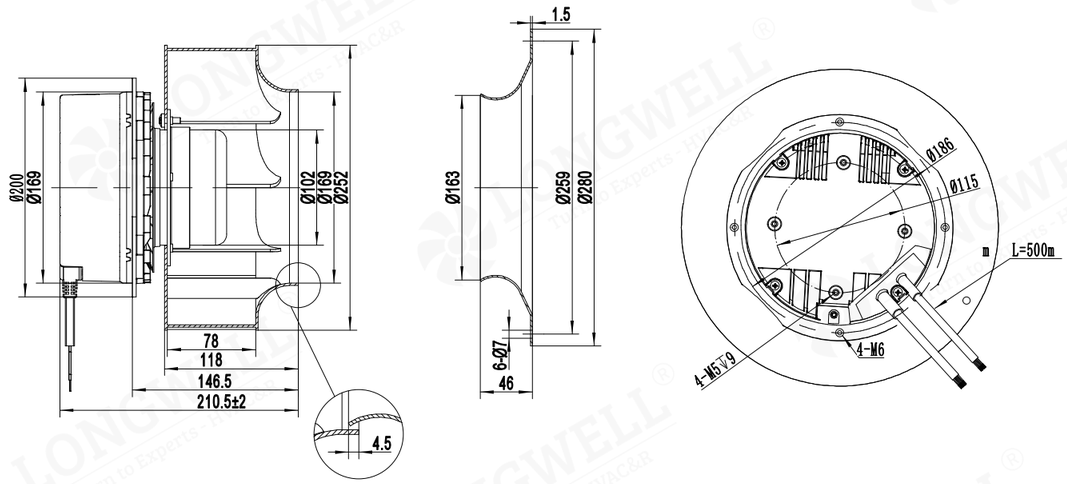

LWBE3G250-102PS-07 (with bracket)

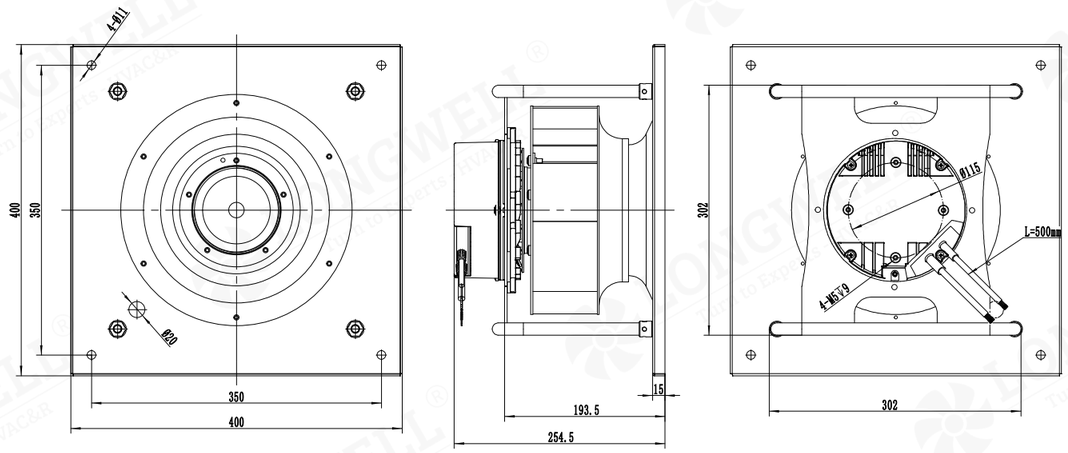

Ningbo Longwell Electric Technology Co., Ltd
https://www.longwellfans.com Email:sales@zjlongwell.com

LWBE-250 Serise




Product Characteristic


- Impeller Material: Aluminum Alloy
- Supply Voltage: 400V,50/60Hz
- Mode of Operation: S1
- Protection Class: IP55
- Insulation Class: F
- Operation Temperature: -25℃～+60℃
- Technical Feature: Control input 0-10VDC/PWM,Tach output,Locked-Rotor protection,Reverse Polarity Over-voltage protection,Soft Start Protection.

Technical Specifications

Model	Voltage (V)	Input Power (W)	Current (A)	Air Volume (m^3/h)	Static Pressure (Pa)	Speed (RPM)	Noise [dB(A)]
LWBE3G250-102PT-08	400	1000	1.6	3708	1751	3860	92

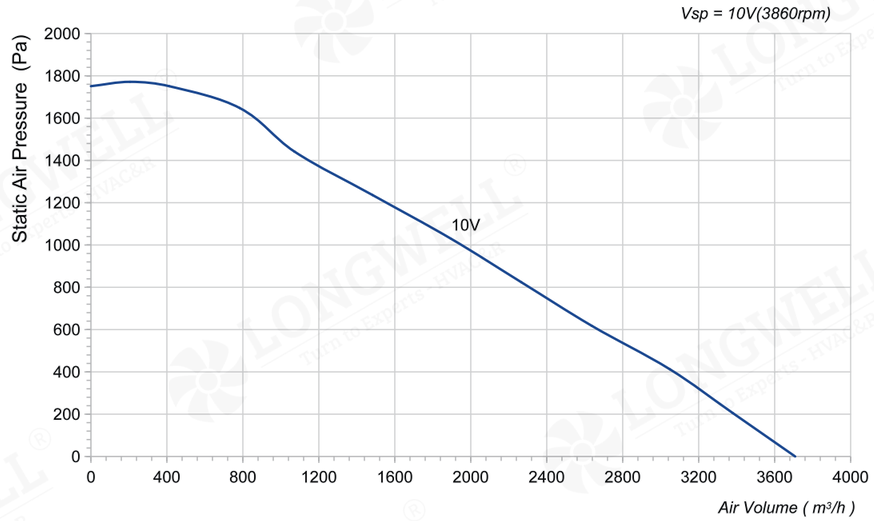

LWBE3G250-102NT-21 (without bracket)

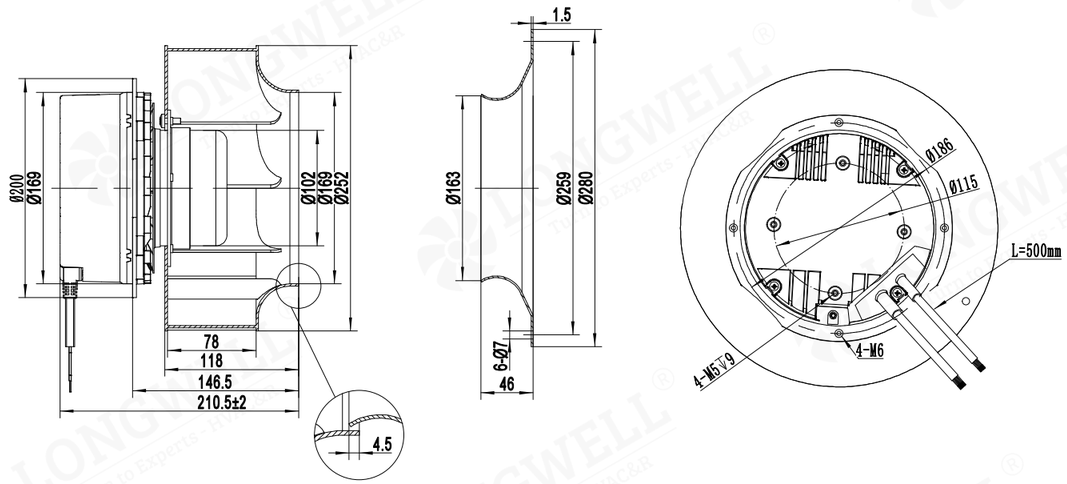

LWBE3G250-102PT-08 (with bracket)

