
LWBE-270 Serise



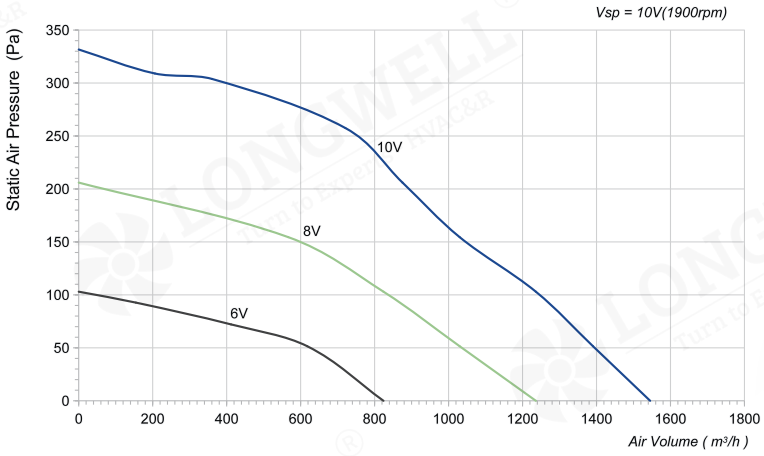


Product Characteristic


- Impeller Material: Aluminum Alloy
- Supply Voltage: 230V,50/60Hz
- Direction of Rotation: Clockwise,seen on rotor
- Mode of Operation: S1
- Protection Class: IP44
- Insulation Class: F
- Mounting Position: Horizontal or Vertical
- Operation Temperature: -25℃～+60℃
- Bearing: Maintenance-free ball bearings
- Technical Features: Control input 0-10VDC/PWM
- Protection: Tach output,Locked-Rotor protection Reverse Polarity,Over-voltage protection,Soft Start

Technical Specifications

Model	Voltage (V)	Input Power (W)	Current (A)	Air Volume (m³/h)	Static Pressure (Pa)	Speed (RPM)	Noise [dB(A)]
LWBE3G270-092NS-02	230	150	1.3	1545	332	1900	68

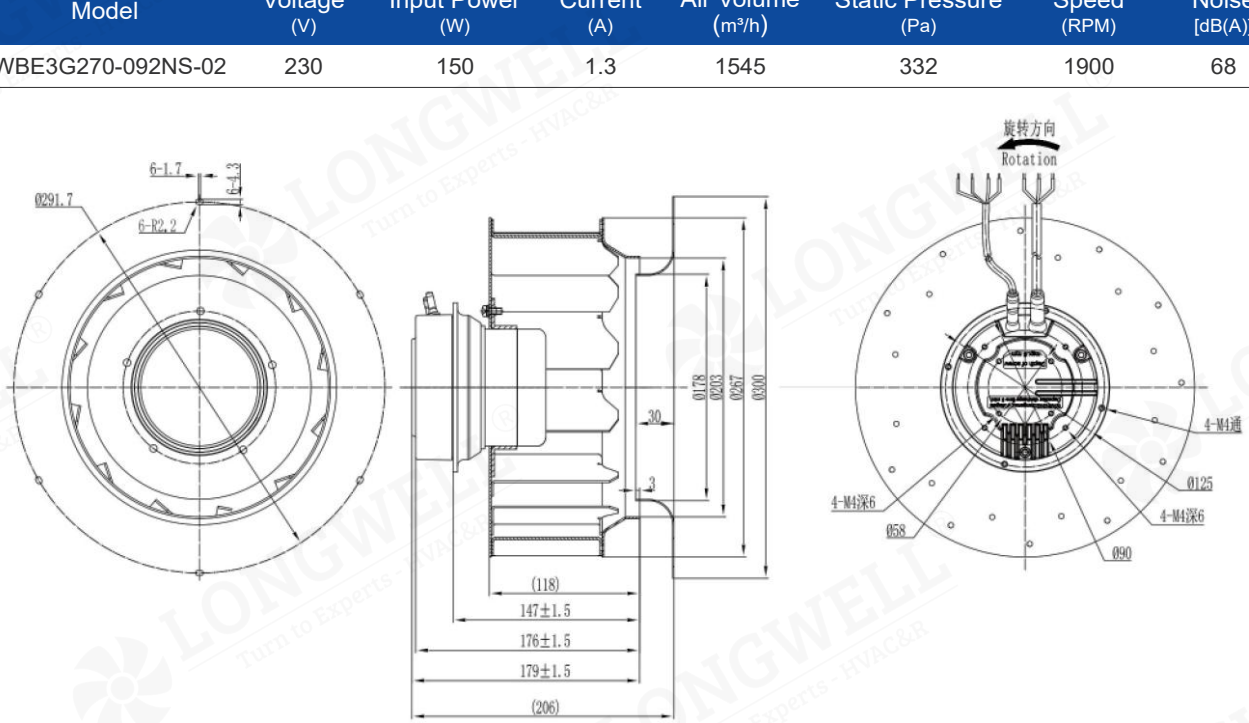

LWBE-270 Serise

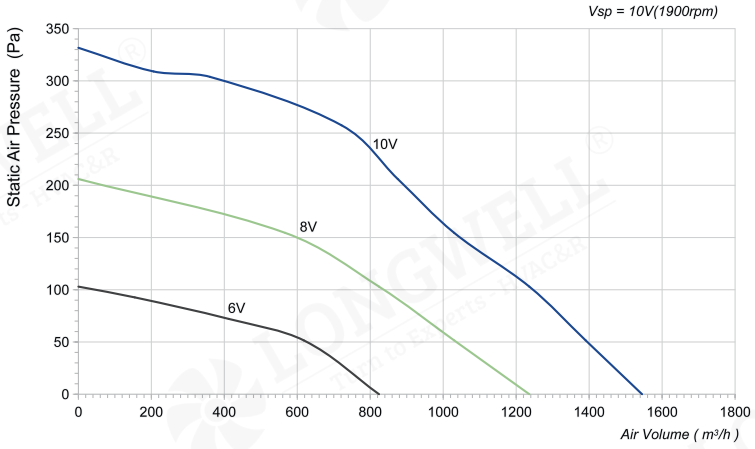



Product Characteristic

- Impeller Material: Aluminum Alloy
- Supply Voltage: 115V,50/60Hz
- Direction of Rotation: Clockwise,seen on rotor
- Mode of Operation: S1
- Protection Class: IP44
- Insulation Class: F
- Mounting Position: Horizontal or Vertical
- Operation Temperature: -25℃～+60℃
- Bearing: Maintenance-free ball bearings
- Technical Features: Control input 0-10VDC/PWM
- Protection: Tach output,Locked-Rotor protection Reverse Polarity,Over-voltage protection,Soft Start

Technical Specifications

Model	Voltage (V)	Input Power (W)	Current (A)	Air Volume (m³/h)	Static Pressure (Pa)	Speed (RPM)	Noise [dB(A)]
LWBE3G270-092NU-01	115	170	2.3	1545	332	1900	68

