
LWBE-280 Serise



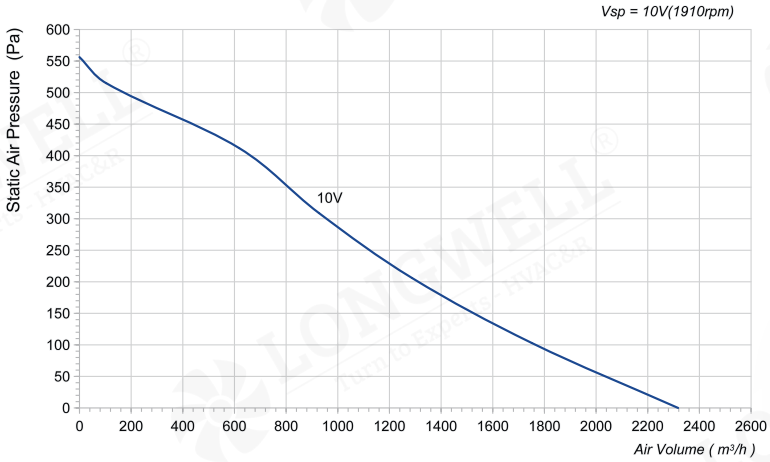


Product Characteristic


- Impeller Material: Aluminum Alloy
- Supply Voltage: 230V,50/60Hz
- Direction of Rotation: Clockwise,seen on rotor
- Mode of Operation: S1
- Protection Class: IP55
- Insulation Class: F
- Mounting Position: Horizontal or Vertical
- Operation Temperature: -25℃～+60℃
- Bearing: Maintenance-free ball bearings
- Technical Features: Control input 0-10VDC/PWM
- Protection: Tach output,Locked-Rotor protection Reverse Polarity,Over-voltage protection,Soft Start

Technical Specifications

Model	Voltage (V)	Input Power (W)	Current (A)	Air Volume (m³/h)	Static Pressure (Pa)	Speed (RPM)	Noise [dB(A)]
LWBE3G280-072NS-12	230	170	1.2	2318	556	1910	73
LWBE3G280-072NU-21	115	170	2.4	2318	556	1910	73

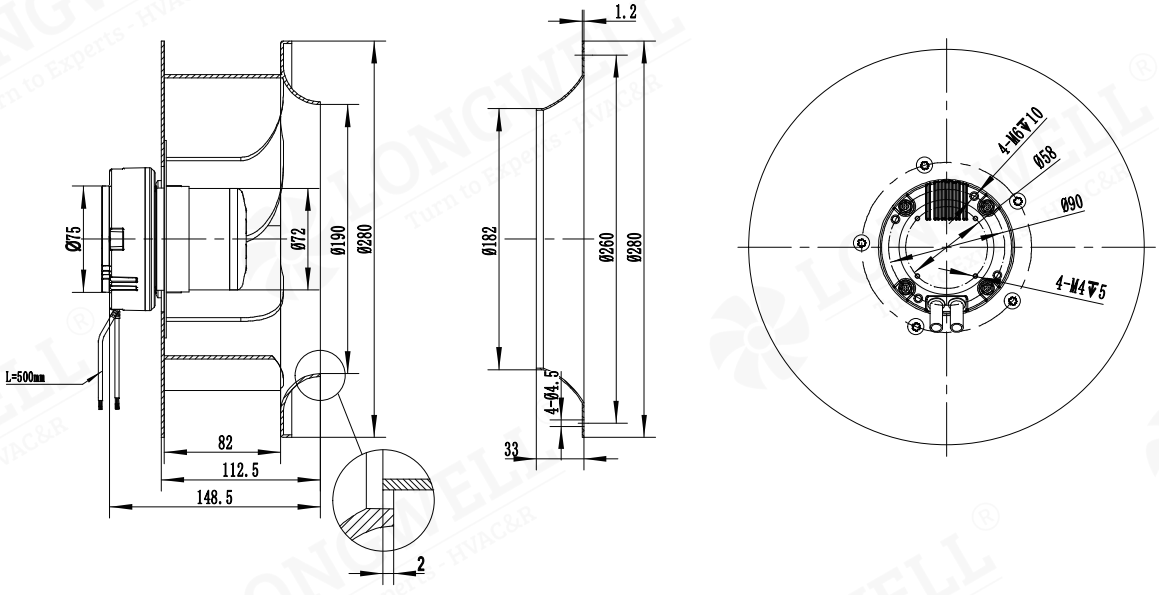

LWBE-280 Serise

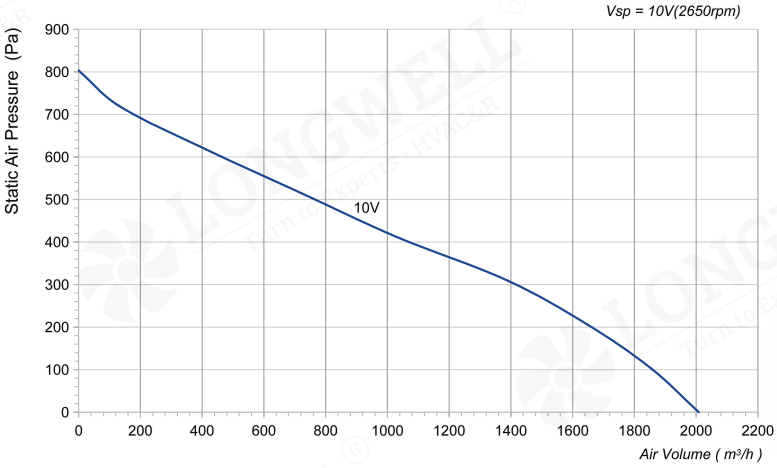




Product Characteristic


- Impeller Material: Aluminum Alloy
- Supply Voltage: 230V,50/60Hz
- Direction of Rotation: Clockwise,seen on rotor
- Mode of Operation: S1
- Protection Class: IP55
- Insulation Class: F
- Mounting Position: Horizontal or Vertical
- Operation Temperature: -25℃～+60℃
- Bearing: Maintenance-free ball bearings
- Technical Features: Control input 0-10VDC/PWM
- Protection: Tach output,Locked-Rotor protection Reverse Polarity,Over-voltage protection,Soft Start

Technical Specifications

Model	Voltage (V)	Input Power (W)	Current (A)	Air Volume (m³/h)	Static Pressure (Pa)	Speed (RPM)	Noise [dB(A)]
LWBE3G280-092NS-11	230	225	1.6	2009	803	2650	70

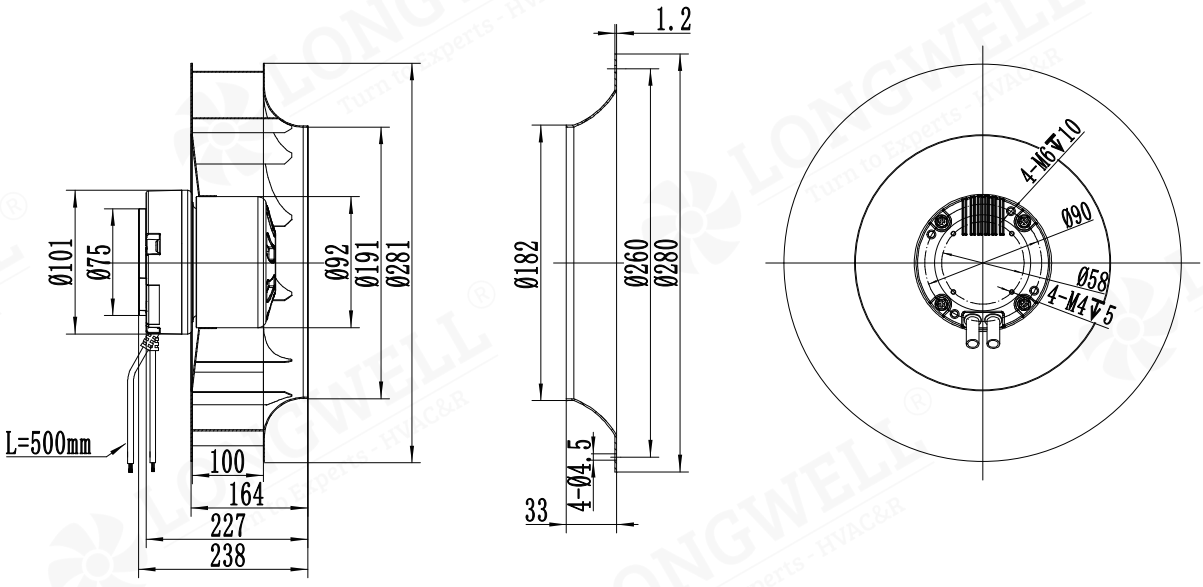

LWBE-280 Serise

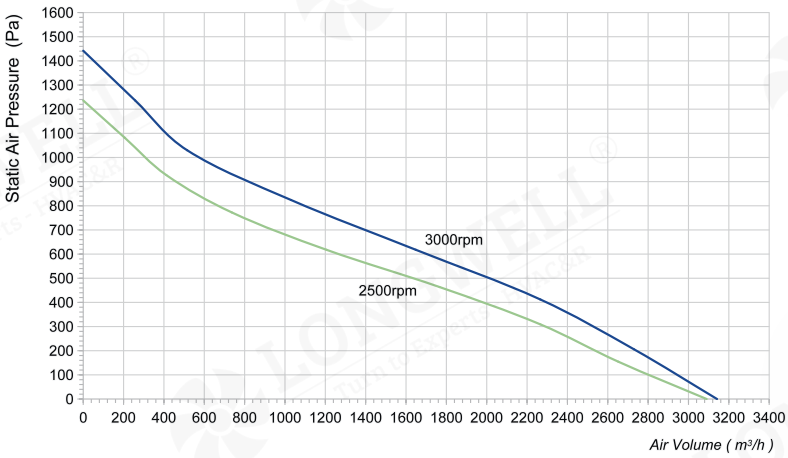




Product Characteristic


Impeller Material:	Aluminum Alloy	Supply Voltage:	230V,50/60Hz
Direction of Rotation:	Clockwise,seen on rotor	Mode of Operation:	S1
Protection Class:	IP55	Insulation Class:	F
Mounting Position:	Horizontal or Vertical	Operation Temperature:	-25℃～+60℃
Bearing:	Maintenance-free ball bearings	Technical Features:	Control input 0-10VDC/PWM

- Protection: Tach output,Locked-Rotor protection Reverse Polarity,Over-voltage protection,Soft Start


Technical Specifications

Model	Voltage (V)	Input Power (W)	Current (A)	Air Volume (m³/h)	Static Pressure (Pa)	Speed (RPM)	Noise [dB(A)]
LWBE3G280-102NS-16	230	500	2.3	3193	1442	3000	75
LWBE3G280-102NU-22	115	400	3.5	3090	1236	2500	71

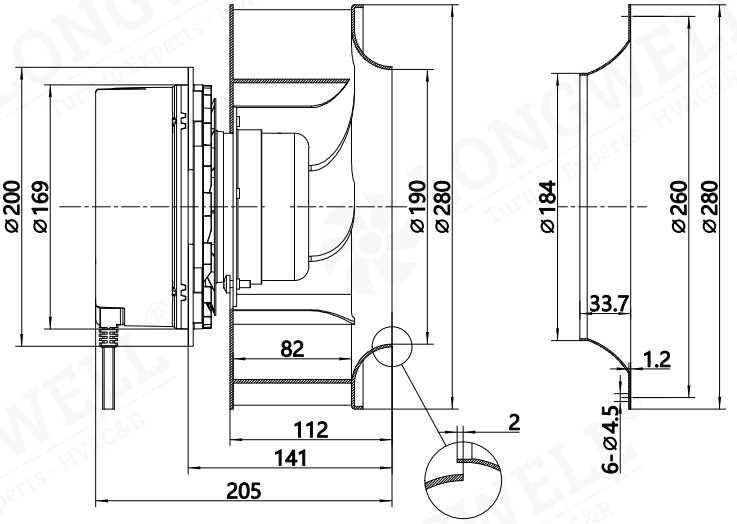

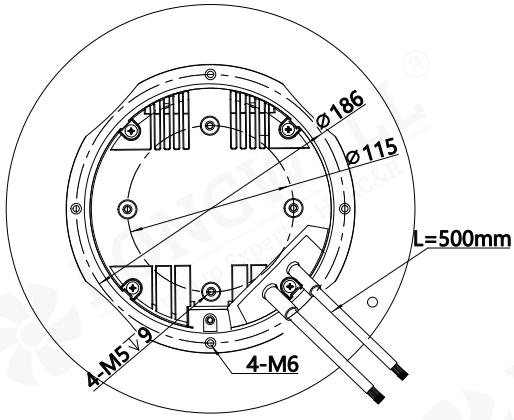

LWBE-280 Serise

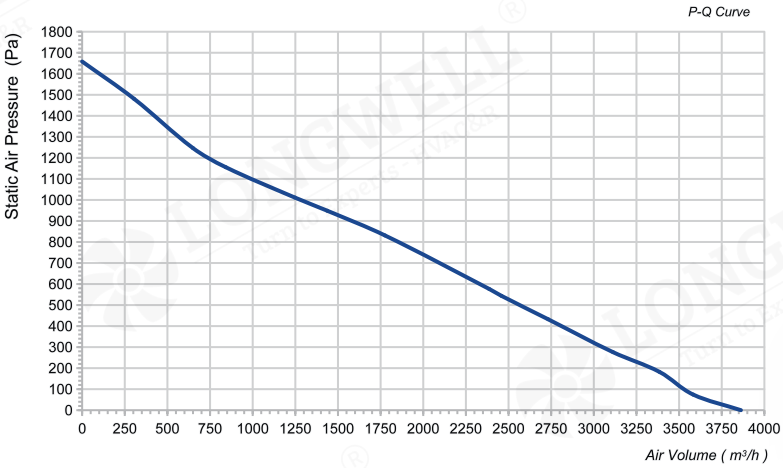





Product Characteristic


- Impeller Material: Aluminum Alloy
- Supply Voltage: 230V,50/60Hz
- Direction of Rotation: Clockwise,seen on rotor
- Mode of Operation: S1
- Protection Class: IP55
- Insulation Class: F
- Mounting Position: Horizontal or Vertical
- Operation Temperature: -25℃～+60℃
- Bearing: Maintenance-free ball bearings
- Technical Features: Control input 0-10VDC/PWM
- Protection: Tach output,Locked-Rotor protection Reverse Polarity,Over-voltage protection,Soft Start

Technical Specifications


Model	Voltage (V)	Input Power (W)	Current (A)	Air Volume (m³/h)	Static Pressure (Pa)	Speed (RPM)	Noise [dB(A)]
LWBE3G280-102NS-06	230	700	3.1	3863	1658	3270	85

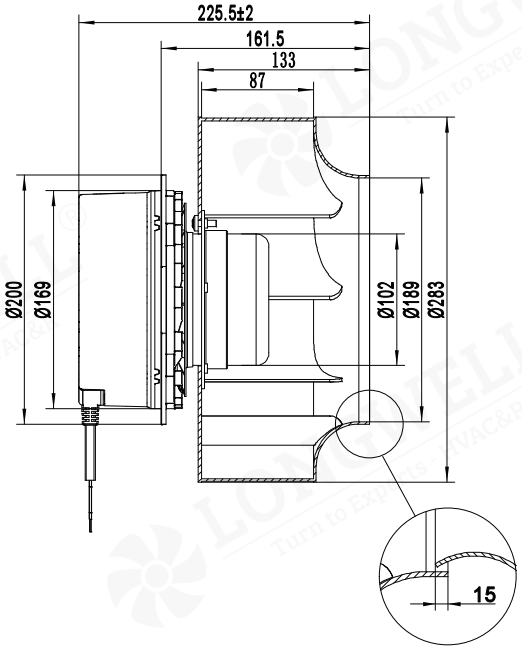

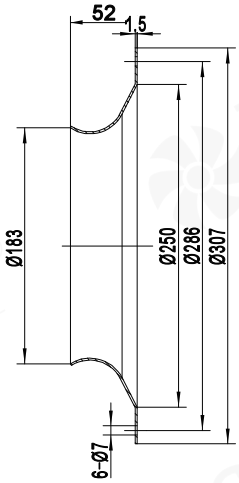

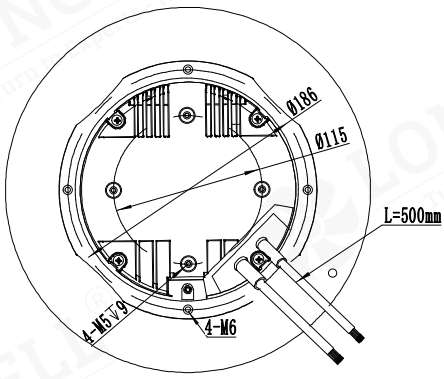

LWBE-280 Serise

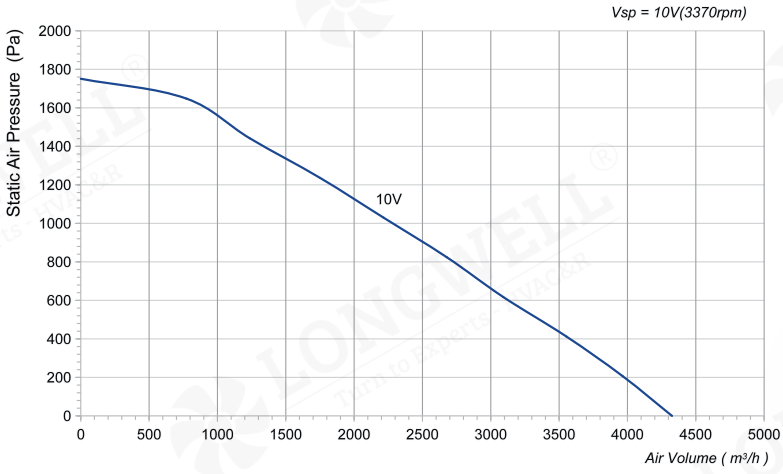



Product Characteristic

• Impeller Material:	Aluminum Alloy	• Supply Voltage:	400V,50/60Hz
• Direction of Rotation:	Clockwise,seen on rotor	• Mode of Operation:	S1
• Protection Class:	IP55	• Insulation Class:	F
• Mounting Position:	Horizontal or Vertical	• Operation Temperature:	-25℃～+60℃
• Bearing:	Maintenance-free ball bearings	• Technical Features:	Control input 0-10VDC/PWM

• Protection: Tach output,Locked-Rotor protection Reverse Polarity,Over-voltage protection,Soft Start

Technical Specifications

Model	Voltage (V)	Input Power (W)	Current (A)	Air Volume (m³/h)	Static Pressure (Pa)	Speed (RPM)	Noise [dB(A)]
LWBE3G280-102NT-17	400	1100	1.7	4378	1751	3370	78

