Ningbo Longwell Electric Technology Co., Ltd
https://www.longwellfans.com Email:sales@zjlongwell.com

LWBE-280 Serise




Product Characteristic


- Impeller Material: Aluminum Alloy
- Supply Voltage: 230V,50/60Hz
- Mode of Operation: S1
- Protection Class: IP55
- Insulation Class: F
- Operation Temperature: -25℃～+60℃
- Technical Feature: Control input 0-10VDC/PWM,Tach output,Locked-Rotor protection,Reverse Polarity Over-voltage protection,Soft Start Protection.

Technical Specifications


Model	Voltage (V)	Input Power (W)	Current (A)	Air Volume (m^3/h)	Static Pressure (Pa)	Speed (RPM)	Noise [dB(A)]
LWBE3G280-072PS-01	230	170	1.2	2318	556	1910	73

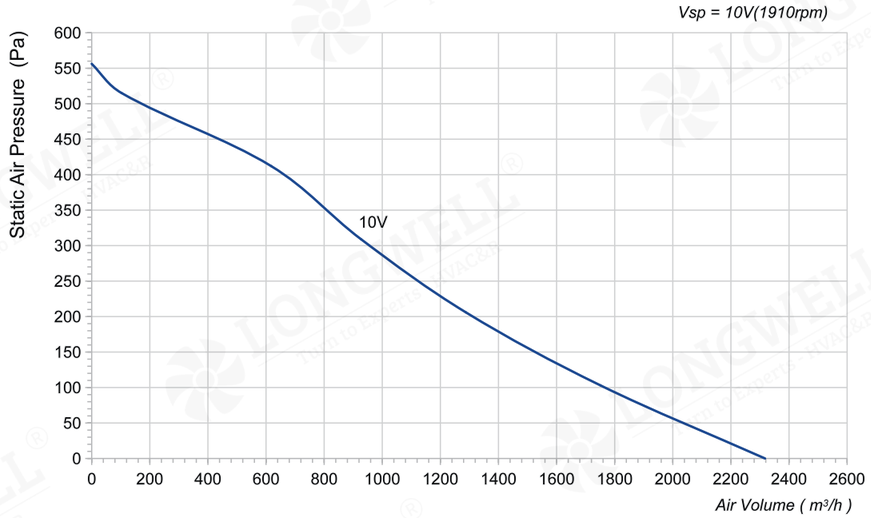

LWBE3G280-072NS-12 (without bracket)

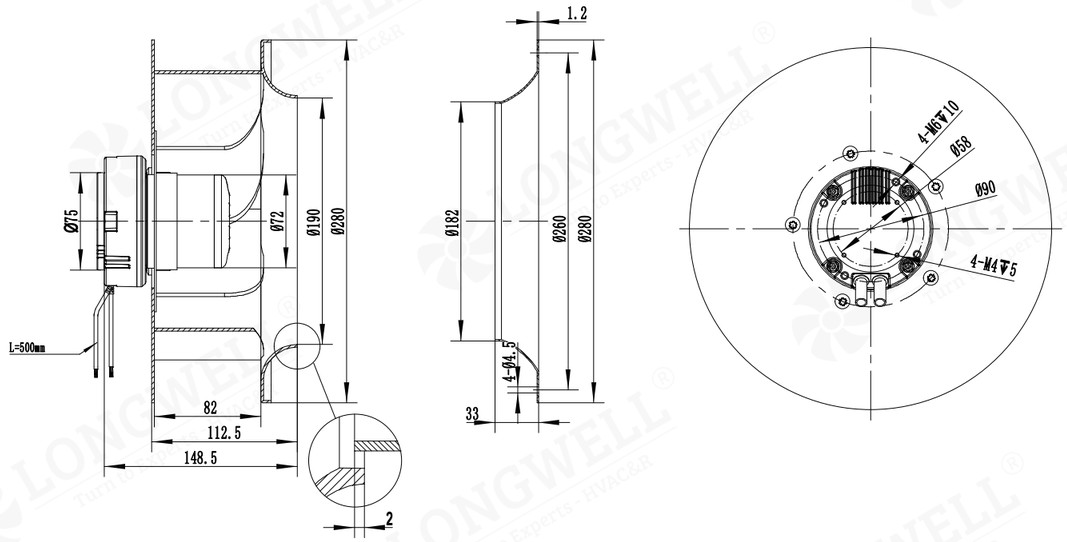

LWBE3G280-072PS-01 (with bracket)

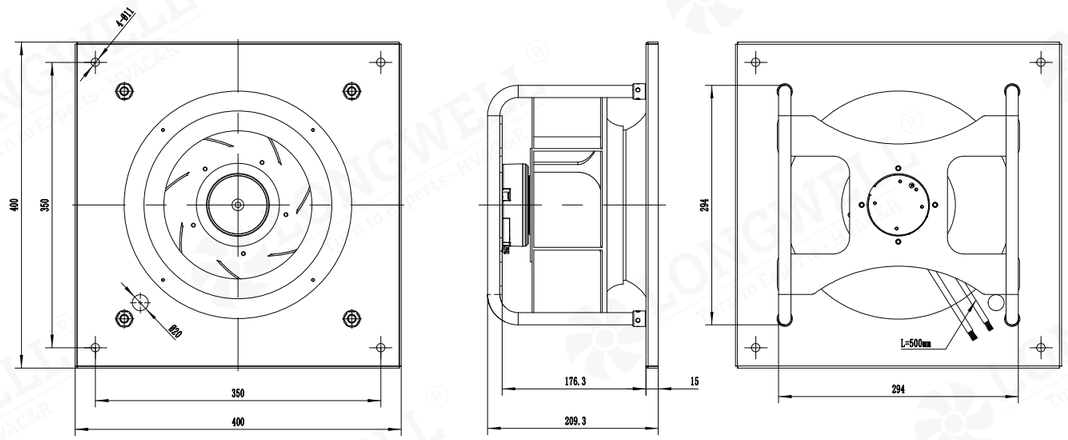

Ningbo Longwell Electric Technology Co., Ltd
https://www.longwellfans.com Email:sales@zjlongwell.com

LWBE-280 Serise




Product Characteristic


- Impeller Material: Aluminum Alloy
- Supply Voltage: 230V,50/60Hz
- Mode of Operation: S1
- Protection Class: IP55
- Insulation Class: F
- Operation Temperature: -25℃～+60℃
- Technical Feature: Control input 0-10VDC/PWM,Tach output,Locked-Rotor protection,Reverse Polarity Over-voltage protection,Soft Start Protection.

Technical Specifications


Model	Voltage (V)	Input Power (W)	Current (A)	Air Volume (m^3/h)	Static Pressure (Pa)	Speed (RPM)	Noise [dB(A)]
LWBE3G280-092PS-03	230	225	1.6	2009	803	2650	70

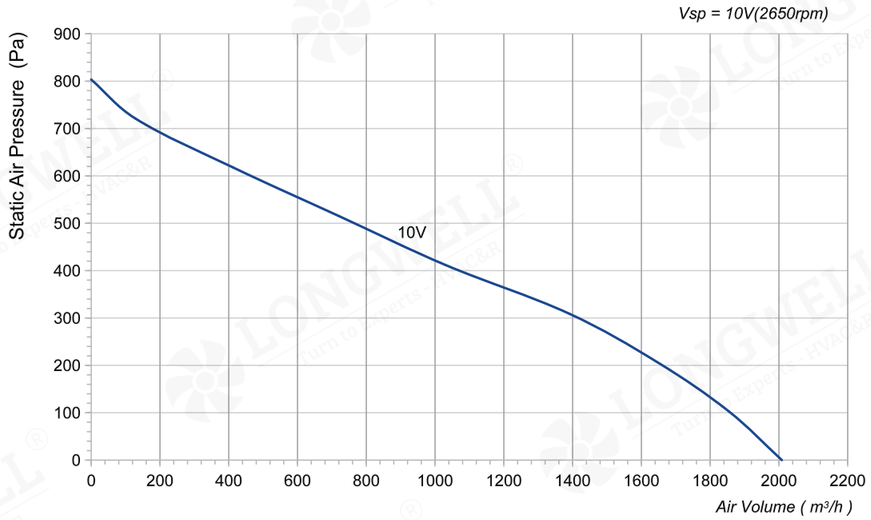

LWBE3G280-092NS-11 (without bracket)

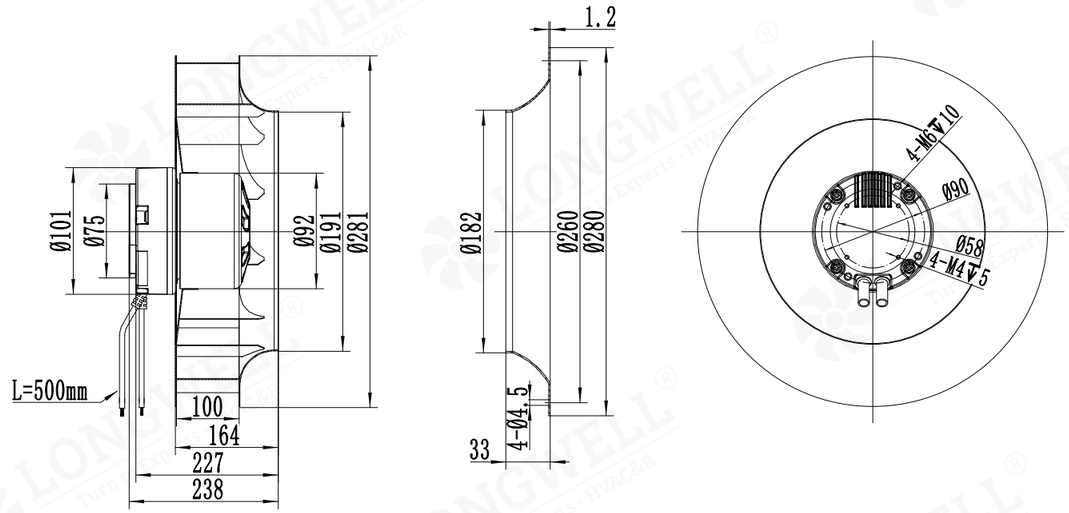

LWBE3G280-092PS-03 (with bracket)

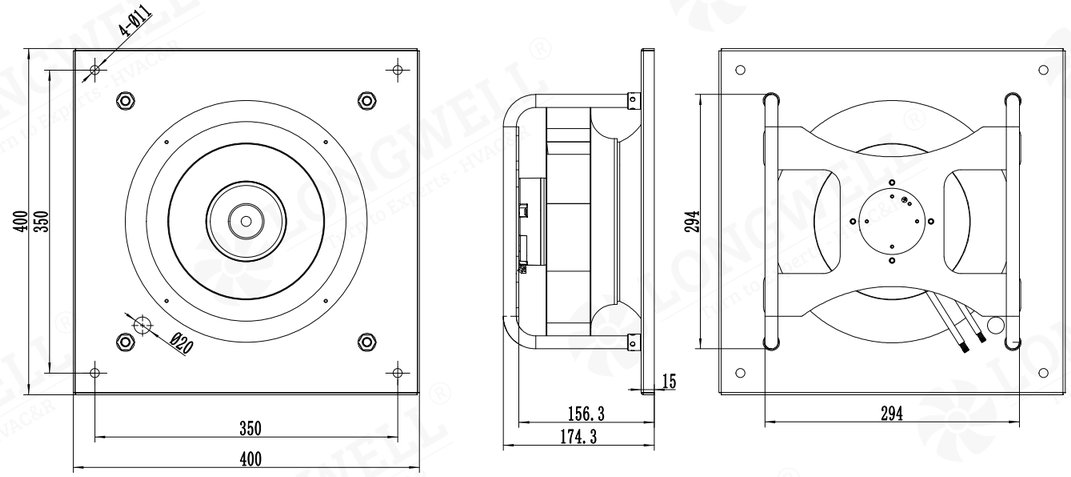

Ningbo Longwell Electric Technology Co., Ltd
https://www.longwellfans.com Email:sales@zjlongwell.com

LWBE-280 Serise




Product Characteristic


- Impeller Material: Aluminum Alloy
- Supply Voltage: 230V,50/60Hz
- Mode of Operation: S1
- Protection Class: IP55
- Insulation Class: F
- Operation Temperature: -25℃～+60℃
- Technical Feature: Control input 0-10VDC/PWM,Tach output,Locked-Rotor protection,Reverse Polarity Over-voltage protection,Soft Start Protection.

Technical Specifications


Model	Voltage (V)	Input Power (W)	Current (A)	Air Volume (m^3/h)	Static Pressure (Pa)	Speed (RPM)	Noise [dB(A)]
LWBE3G280-102PS-07	230	500	2.3	3193	1442	3000	75

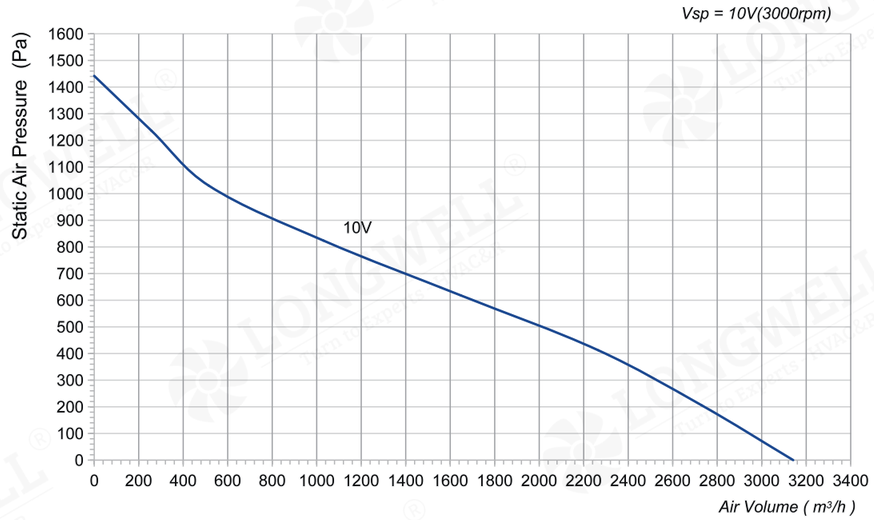

LWBE3G280-102NS-16 (without bracket)

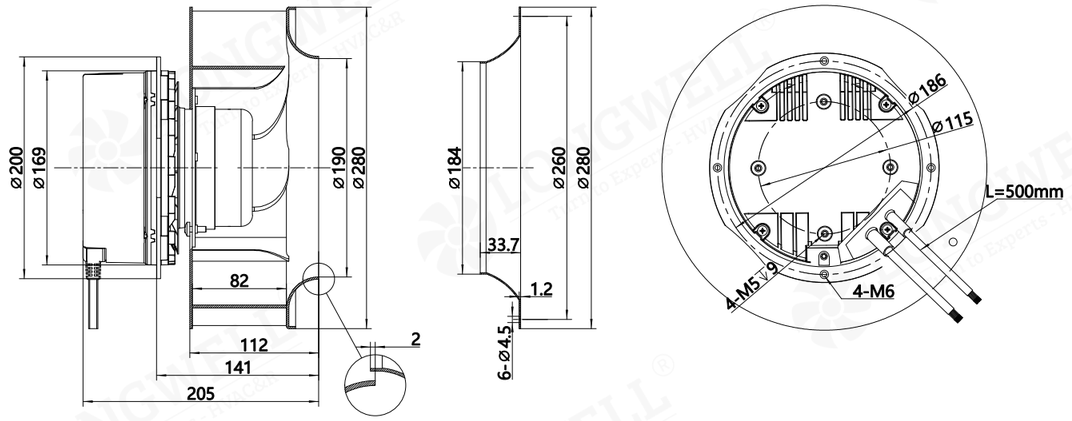

LWBE3G280-102PS-07 (with bracket)

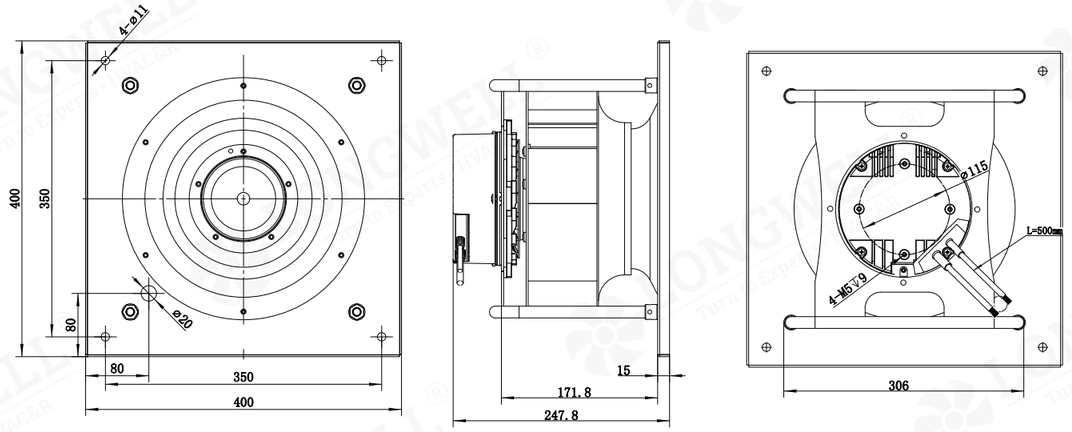

Ningbo Longwell Electric Technology Co., Ltd
https://www.longwellfans.com Email:sales@zjlongwell.com

LWBE-280 Serise




Product Characteristic


- Impeller Material: Aluminum Alloy
- Supply Voltage: 230V,50/60Hz
- Mode of Operation: S1
- Protection Class: IP55
- Insulation Class: F
- Operation Temperature: -25℃～+60℃
- Technical Feature: Control input 0-10VDC/PWM,Tach output,Locked-Rotor protection,Reverse Polarity Over-voltage protection,Soft Start Protection.

Technical Specifications


Model	Voltage (V)	Input Power (W)	Current (A)	Air Volume (m^3/h)	Static Pressure (Pa)	Speed (RPM)	Noise [dB(A)]
LWBE3G280-102PS-04	230	700	3.1	3863	1658	3270	85

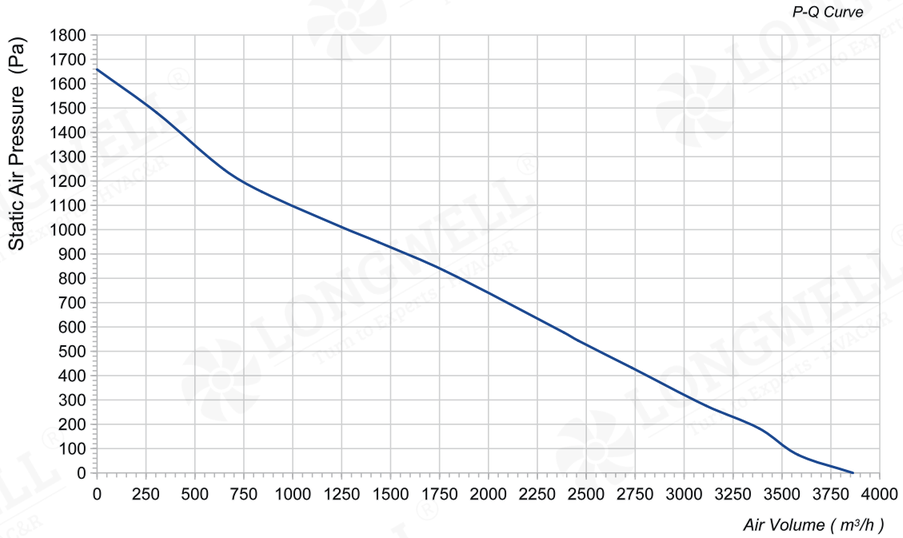

LWBE3G280-102NS-06 (without bracket)

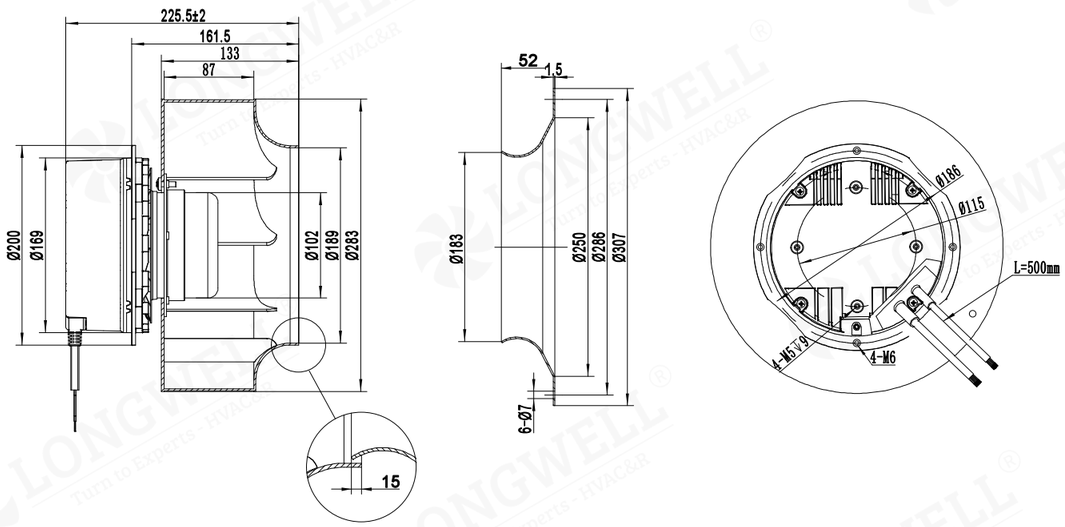

LWBE3G280-102PS-04 (with bracket)

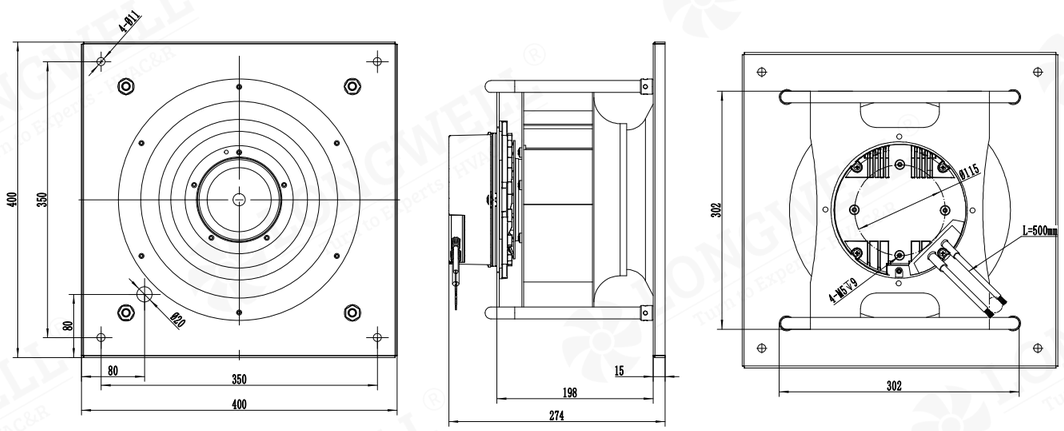

Ningbo Longwell Electric Technology Co., Ltd
https://www.longwellfans.com Email:sales@zjlongwell.com

LWBE-280 Serise




Product Characteristic


- Impeller Material: Aluminum Alloy
- Supply Voltage: 400V,50/60Hz
- Mode of Operation: S1
- Protection Class: IP55
- Insulation Class: F
- Operation Temperature: -25℃～+60℃
- Technical Feature: Control input 0-10VDC/PWM,Tach output,Locked-Rotor protection,Reverse Polarity Over-voltage protection,Soft Start Protection.

Technical Specifications

Model	Voltage (V)	Input Power (W)	Current (A)	Air Volume (m^3/h)	Static Pressure (Pa)	Speed (RPM)	Noise [dB(A)]
LWBE3G280-102PT-08	400	1100	1.7	4378	1751	3370	78

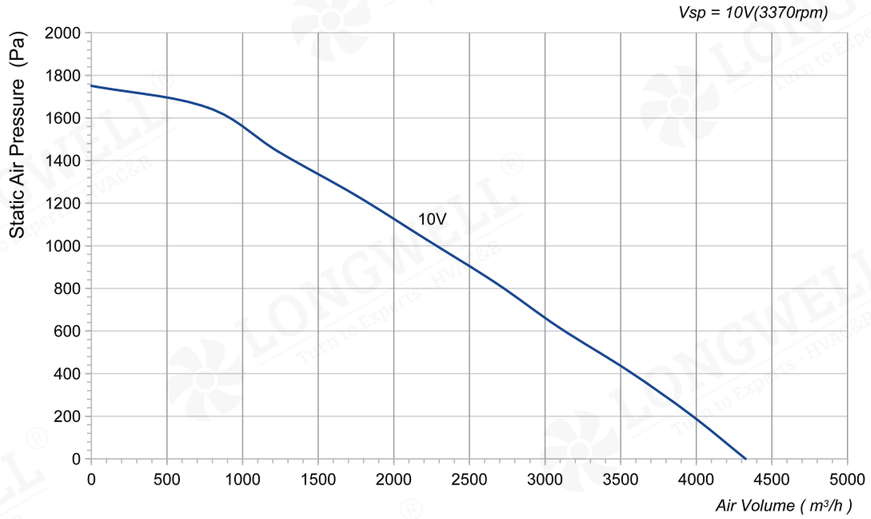

LWBE3G280-102NT-17 (without bracket)

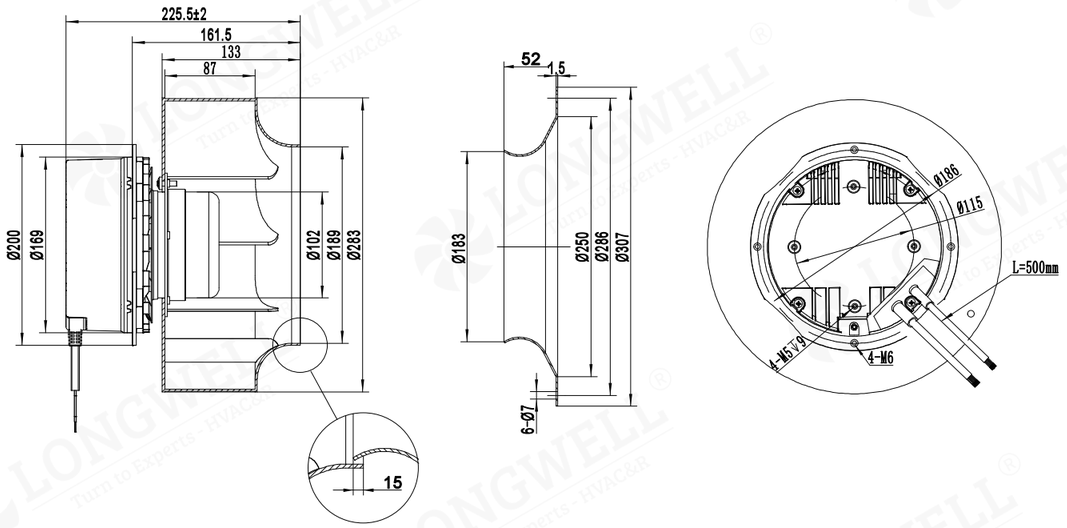

LWBE3G280-102PT-08 (with bracket)

