Ningbo Longwell Electric Technology Co., Ltd
https://www.longwellfans.com Email:sales@zjlongwell.com

LWBE-310 Serise




Product Characteristic


- Impeller Material: Aluminum Alloy
- Supply Voltage: 230V,50/60Hz
- Mode of Operation: S1
- Protection Class: IP55
- Insulation Class: F
- Operation Temperature: -25℃～+60℃
- Technical Feature: Control input 0-10VDC/PWM,Tach output,Locked-Rotor protection,Reverse Polarity Over-voltage protection,Soft Start Protection.


Technical Specifications


Model	Voltage (V)	Input Power (W)	Current (A)	Air Volume (m^3/h)	Static Pressure (Pa)	Speed (RPM)	Noise [dB(A)]
LWBE3G310-072PS-01	230	175	1.25	2266	700	1810	66

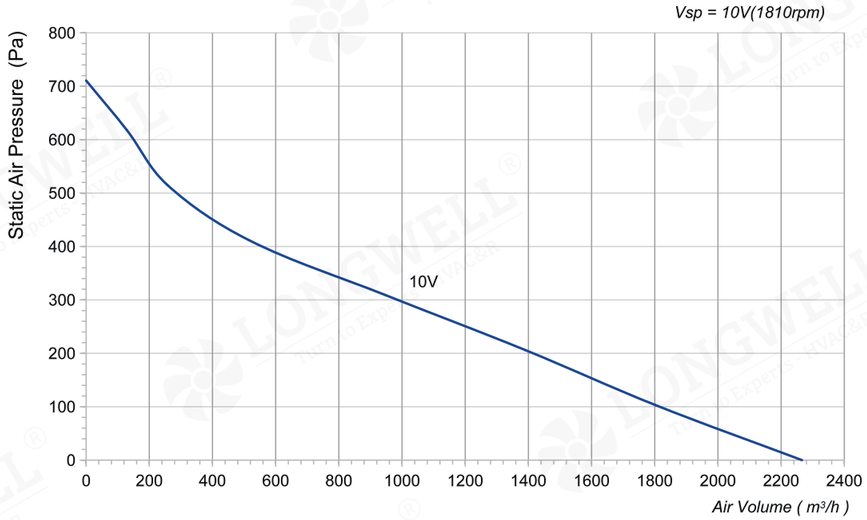


LWBE3G310-072NS-07 (without bracket)

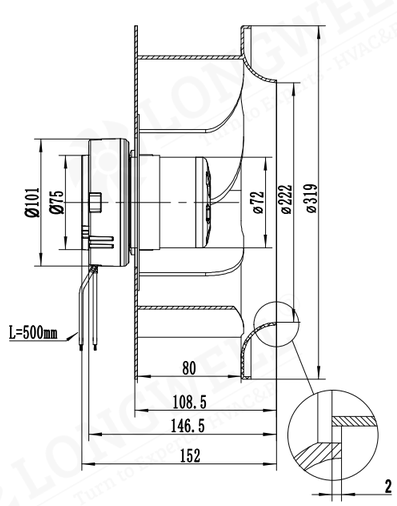


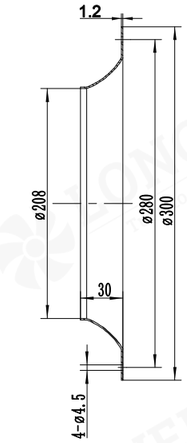

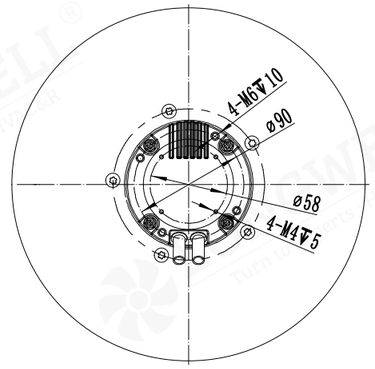

LWBE3G310-072PS-01 (with bracket)

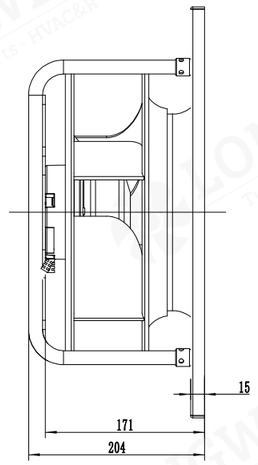

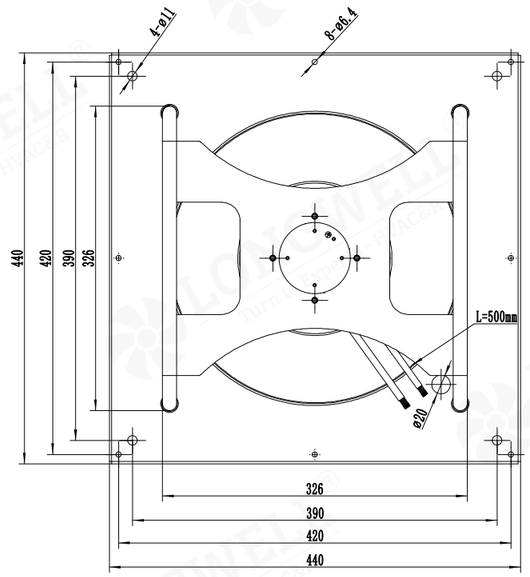

Ningbo Longwell Electric Technology Co., Ltd
https://www.longwellfans.com Email:sales@zjlongwell.com

LWBE-310 Serise




Product Characteristic


- Impeller Material: Aluminum Alloy
- Supply Voltage: 230V,50/60Hz
- Mode of Operation: S1
- Protection Class: IP55
- Insulation Class: F
- Operation Temperature: -25℃～+60℃
- Technical Feature: Control input 0-10VDC/PWM,Tach output,Locked-Rotor protection,Reverse Polarity Over-voltage protection,Soft Start Protection.


Technical Specifications


Model	Voltage (V)	Input Power (W)	Current (A)	Air Volume (m^3/h)	Static Pressure (Pa)	Speed (RPM)	Noise [dB(A)]
LWBE3G310-072PS-06	230	175	1.25	2266	618	1710	72

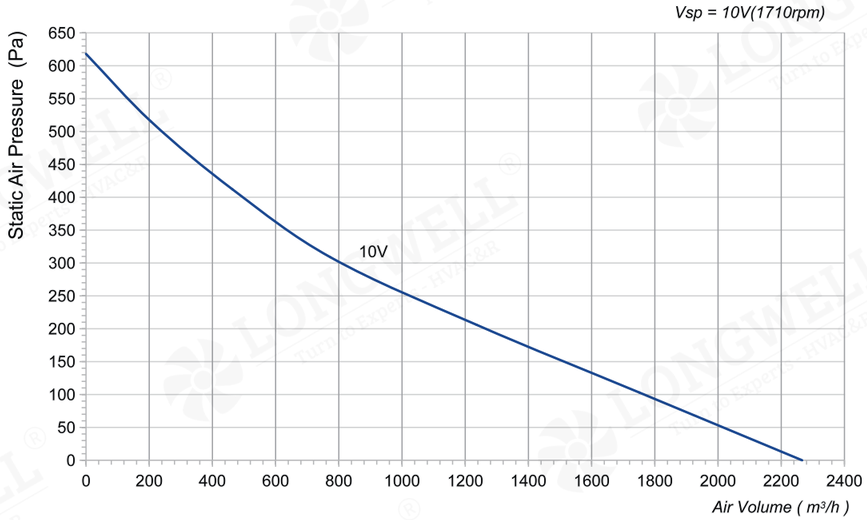


LWBE3G310-072NS-21 (without bracket)

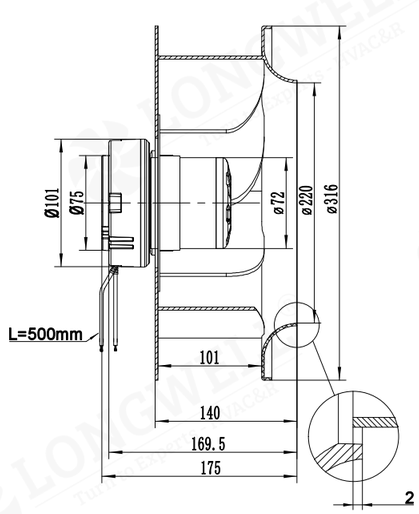


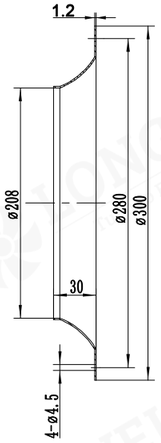

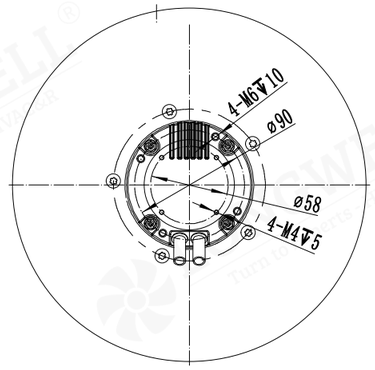

LWBE3G310-072PS-06 (with bracket)

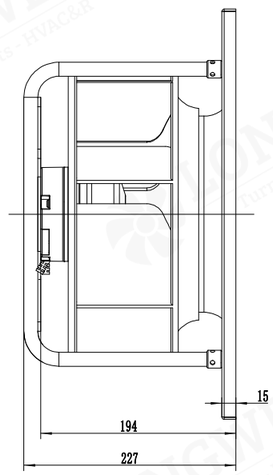

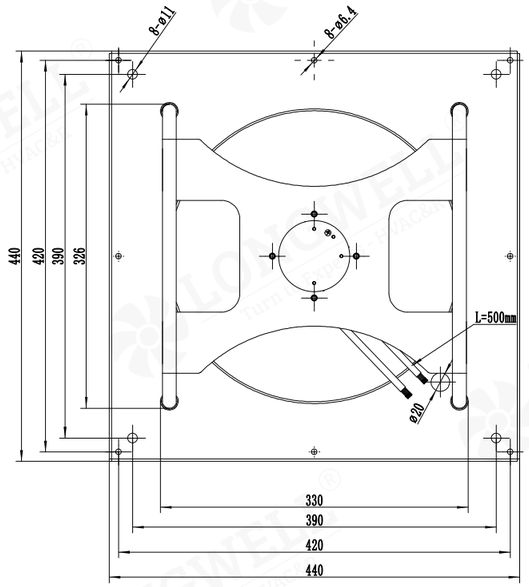

Ningbo Longwell Electric Technology Co., Ltd
https://www.longwellfans.com Email:sales@zjlongwell.com

LWBE-310 Serise




Product Characteristic


- Impeller Material: Aluminum Alloy
- Supply Voltage: 230V,50/60Hz
- Mode of Operation: S1
- Protection Class: IP55
- Insulation Class: F
- Operation Temperature: -25℃～+60℃
- Technical Feature: Control input 0-10VDC/PWM,Tach output,Locked-Rotor protection,Reverse Polarity Over-voltage protection,Soft Start Protection.


Technical Specifications


Model	Voltage (V)	Input Power (W)	Current (A)	Air Volume (m^3/h)	Static Pressure (Pa)	Speed (RPM)	Noise [dB(A)]
LWBE3G310-092PS-07	230	175	1.3	2678	608	1500	63

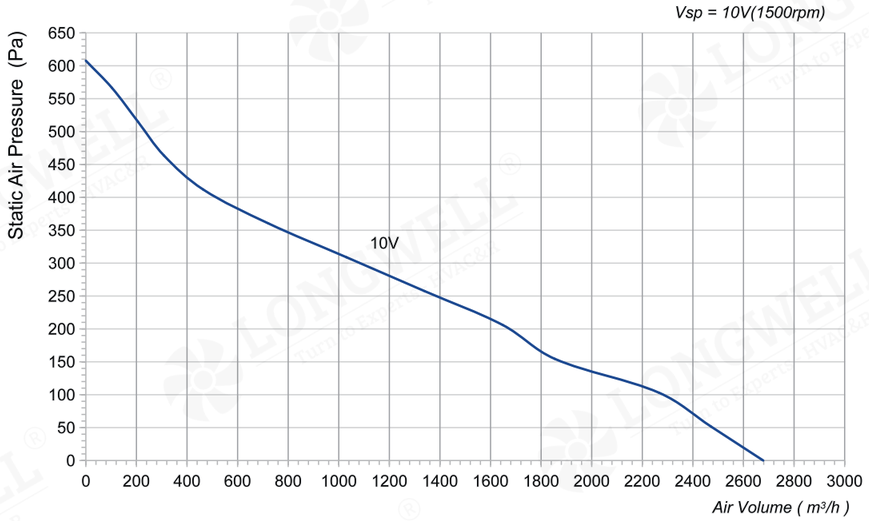


LWBE3G310-092NS-22 (without bracket)

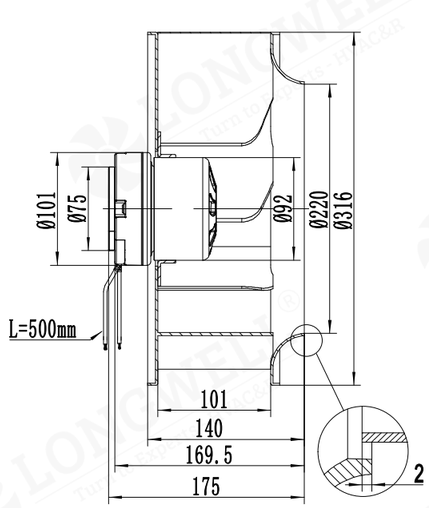


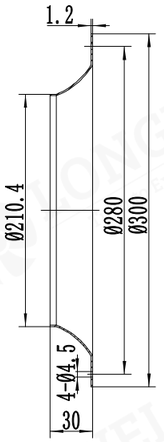

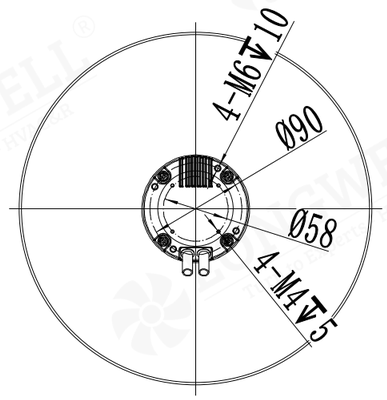

LWBE3G310-092PS-07 (with bracket)

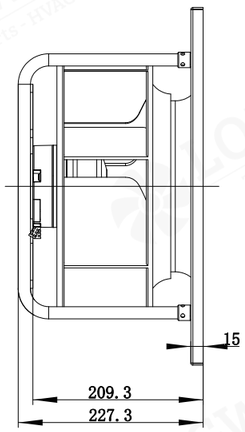

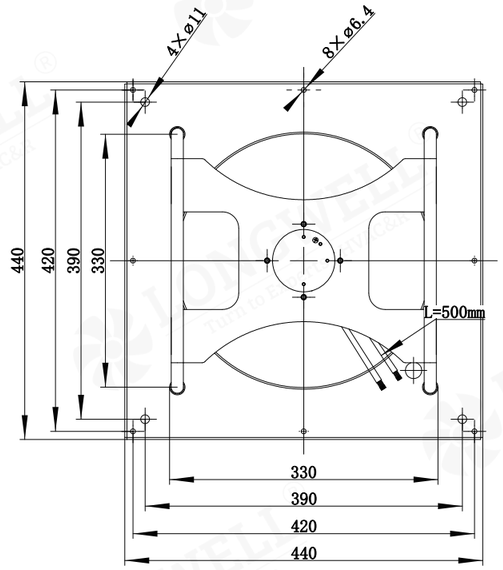

Ningbo Longwell Electric Technology Co., Ltd
https://www.longwellfans.com Email:sales@zjlongwell.com

LWBE-310 Serise




Product Characteristic


- Impeller Material: Aluminum Alloy
- Supply Voltage: 230V,50/60Hz
- Mode of Operation: S1
- Protection Class: IP55
- Insulation Class: F
- Operation Temperature: -25℃～+60℃
- Technical Feature: Control input 0-10VDC/PWM,Tach output,Locked-Rotor protection,Reverse Polarity Over-voltage protection,Soft Start Protection.

Technical Specifications


Model	Voltage (V)	Input Power (W)	Current (A)	Air Volume (m^3/h)	Static Pressure (Pa)	Speed (RPM)	Noise [dB(A)]
LWBE3G310-092PS-08	230	220	1.55	2524	670	2050	66

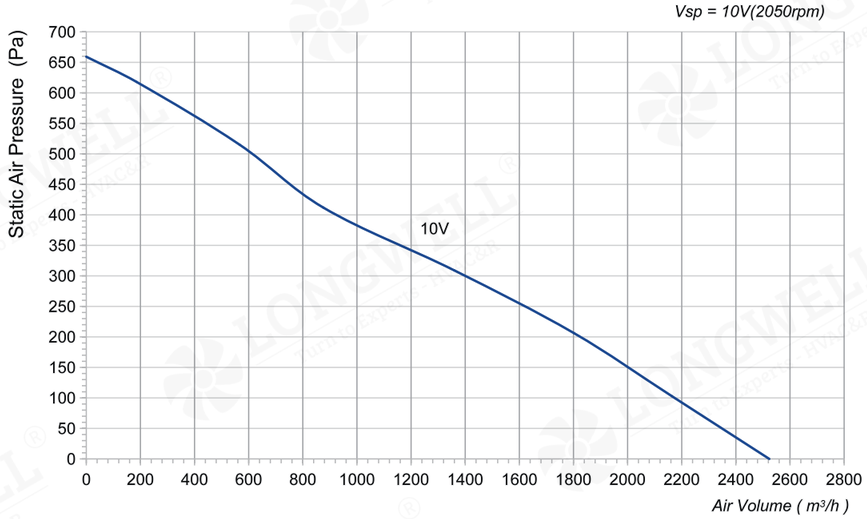

LWBE3G310-092NS-23 (without bracket)

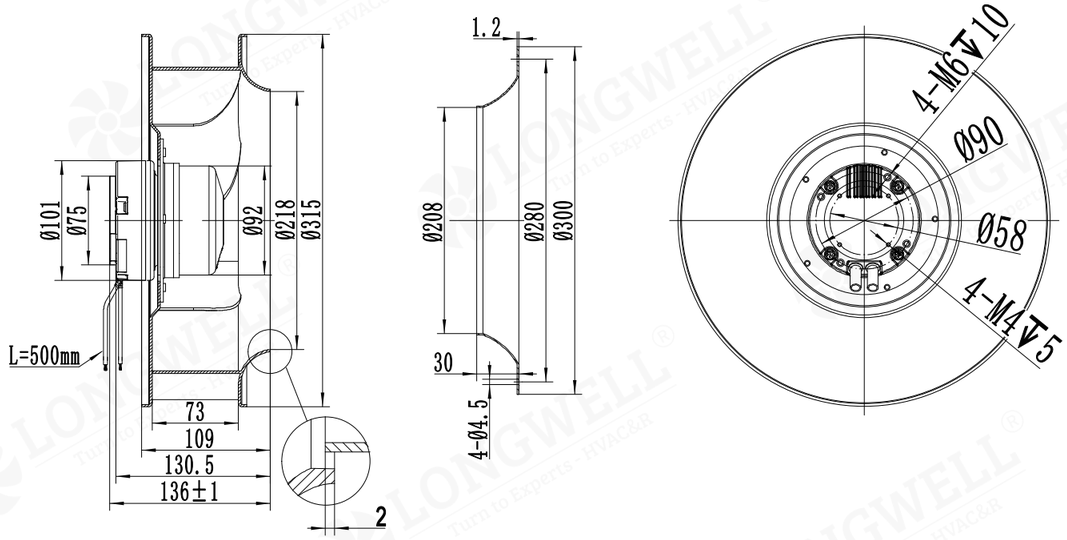

LWBE3G310-092PS-08 (with bracket)

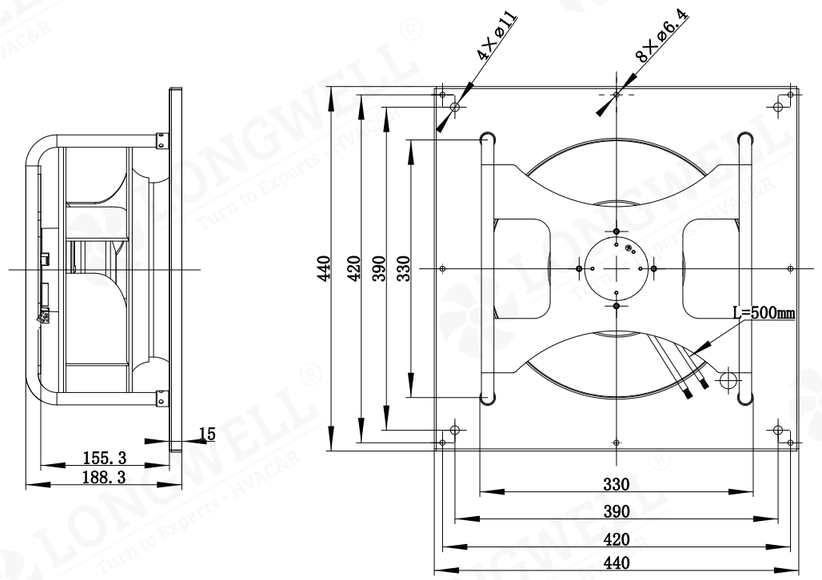

Ningbo Longwell Electric Technology Co., Ltd
https://www.longwellfans.com Email:sales@zjlongwell.com

LWBE-310 Serise




Product Characteristic


- Impeller Material: Aluminum Alloy
- Supply Voltage: 230V,50/60Hz
- Mode of Operation: S1
- Protection Class: IP55
- Insulation Class: F
- Operation Temperature: -25℃～+60℃
- Technical Feature: Control input 0-10VDC/PWM,Tach output,Locked-Rotor protection,Reverse Polarity Over-voltage protection,Soft Start Protection.

Technical Specifications


Model	Voltage (V)	Input Power (W)	Current (A)	Air Volume (m^3/h)	Static Pressure (Pa)	Speed (RPM)	Noise [dB(A)]
LWBE3G310-102PS-03	230	700	3.1	4120	1082	2960	85

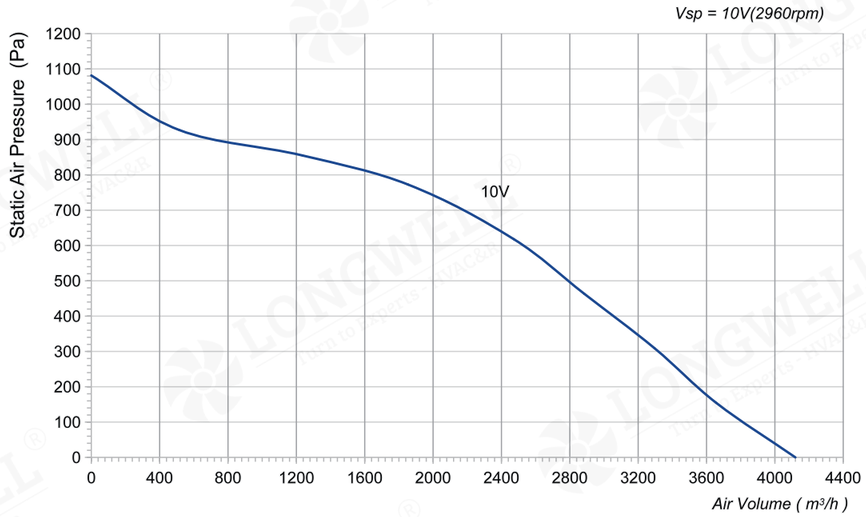

LWBE3G310-102NS-09 (without bracket)

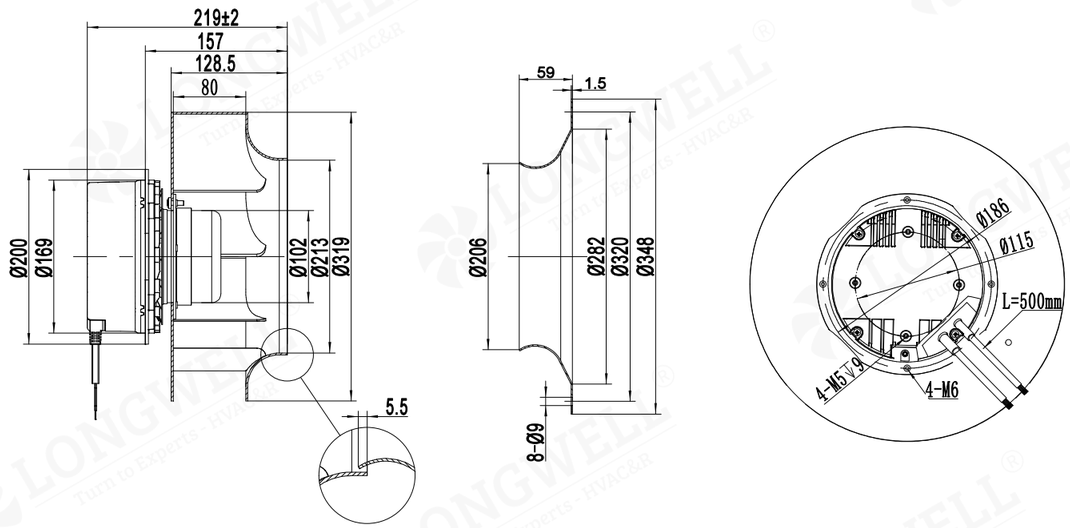

LWBE3G310-102PS-03 (with bracket)

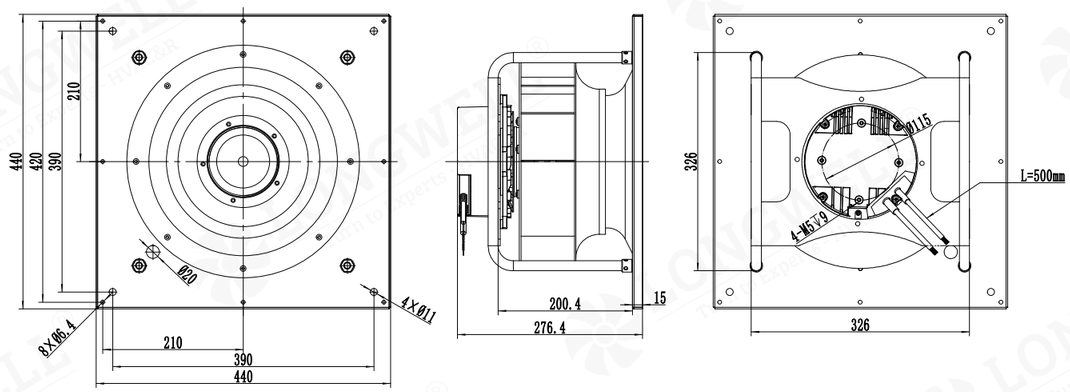

Ningbo Longwell Electric Technology Co., Ltd
https://www.longwellfans.com Email:sales@zjlongwell.com

LWBE-310 Serise




Product Characteristic


- Impeller Material: Aluminum Alloy
- Supply Voltage: 400V,50/60Hz
- Mode of Operation: S1
- Protection Class: IP55
- Insulation Class: F
- Operation Temperature: -25℃～+60℃
- Technical Feature: Control input 0-10VDC/PWM,Tach output,Locked-Rotor protection,Reverse Polarity Over-voltage protection,Soft Start Protection.

Technical Specifications

Model	Voltage (V)	Input Power (W)	Current (A)	Air Volume (m^3/h)	Static Pressure (Pa)	Speed (RPM)	Noise [dB(A)]
LWBE3G310-102PT-09	400	1100	1.2	5150	1730	3000	85

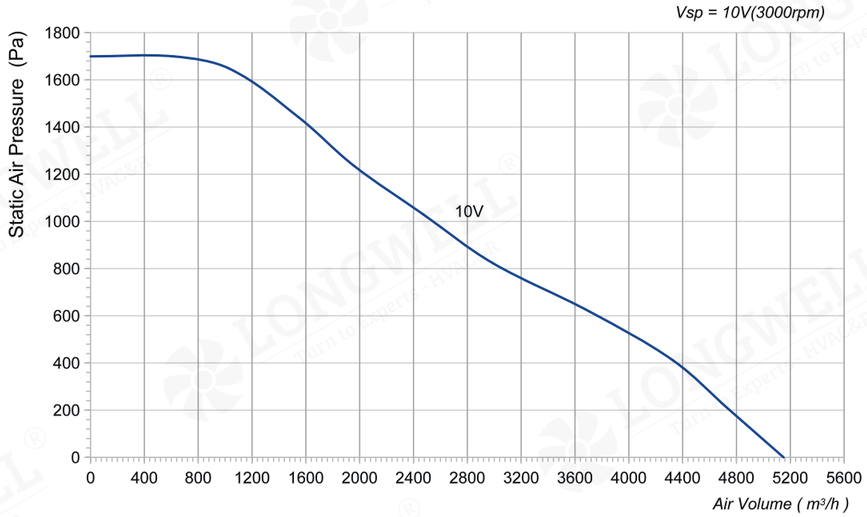

LWBE3G310-102NT-24 (without bracket)

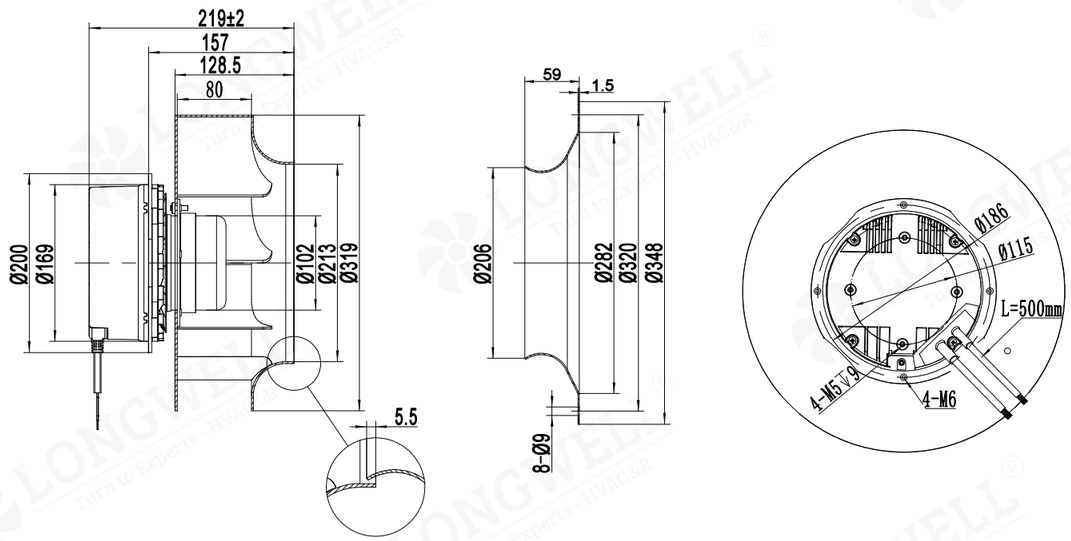

LWBE3G310-102PT-09 (with bracket)

