Ningbo Longwell Electric Technology Co., Ltd
https://www.longwellfans.com Email:sales@zjlongwell.com

LWBE-310 Serise




Product Characteristic


- Impeller Material: Aluminum Alloy
- Supply Voltage: 230V/115V,50/60Hz
- Mode of Operation: S1
- Protection Class: IP44
- Insulation Class: F
- Operation Temperature: -25℃～+60℃
- Technical Feature: Control input 0-10VDC/PWM,Tach output,Locked-Rotor protection,Reverse Polarity Over-voltage protection,Soft Start Protection.


Technical Specifications

Model	Voltage (V)	Input Power (W)	Current (A)	Air Volume (m^3/h)	Static Pressure (Pa)	Speed (RPM)	Noise [dB(A)]
LWBE3G310-092PS-12	230	150	1.2	2410	443	1750	75

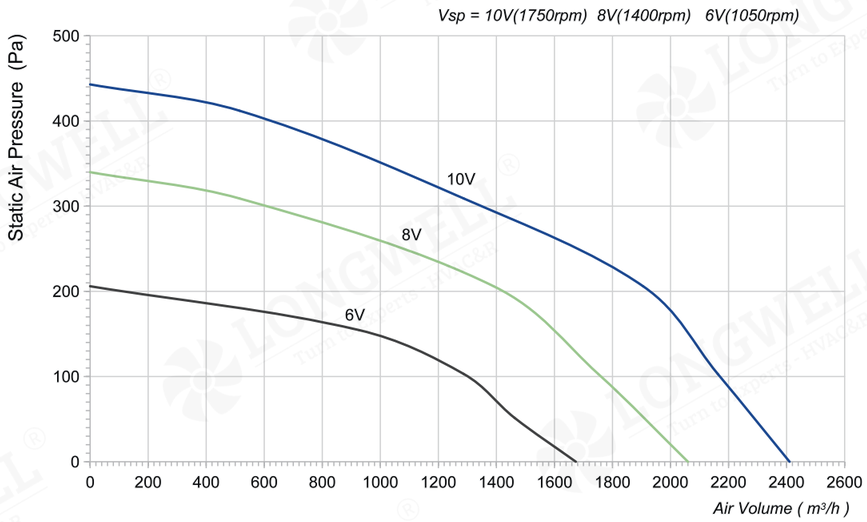



LWBE3G310-092NS-17 (without bracket)

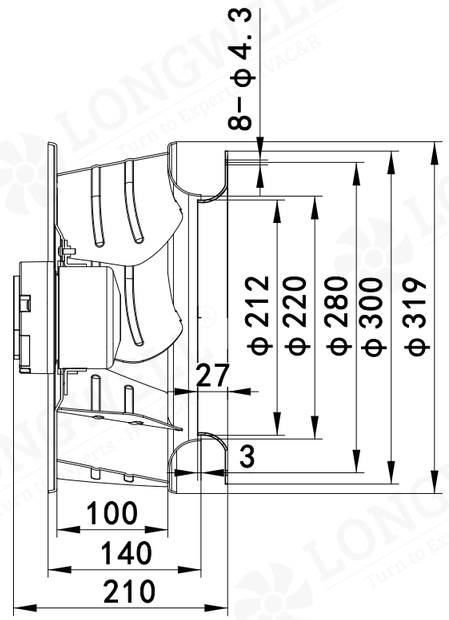

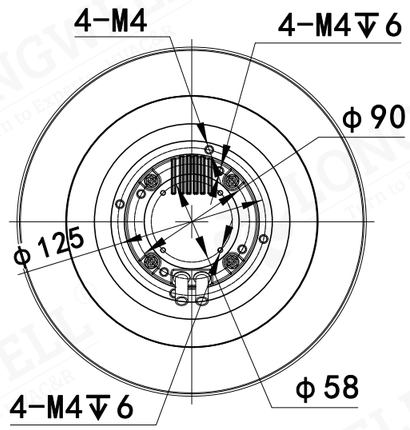

LWBE3G310-092PS-12 (with bracket)

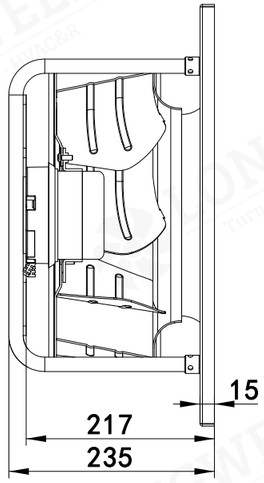

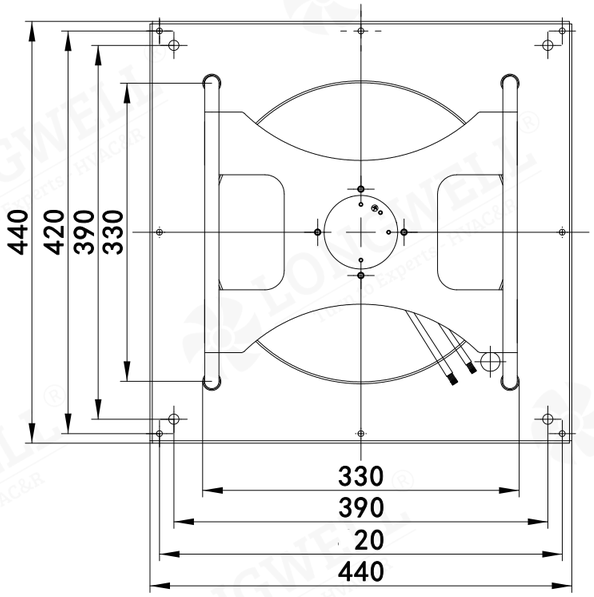

Ningbo Longwell Electric Technology Co., Ltd
https://www.longwellfans.com Email:sales@zjlongwell.com

LWBE-310 Serise




Product Characteristic


- Impeller Material: Aluminum Alloy
- Supply Voltage: 230V/115V,50/60Hz
- Mode of Operation: S1
- Protection Class: IP44
- Insulation Class: F
- Operation Temperature: -25℃～+60℃
- Technical Feature: Control input 0-10VDC/PWM,Tach output,Locked-Rotor protection,Reverse Polarity Over-voltage protection,Soft Start Protection.

Technical Specifications


Model	Voltage (V)	Input Power (W)	Current (A)	Air Volume (m^3/h)	Static Pressure (Pa)	Speed (RPM)	Noise [dB(A)]
LWBE3G310-092PS-11	230	160	1.25	2235	474	1850	75

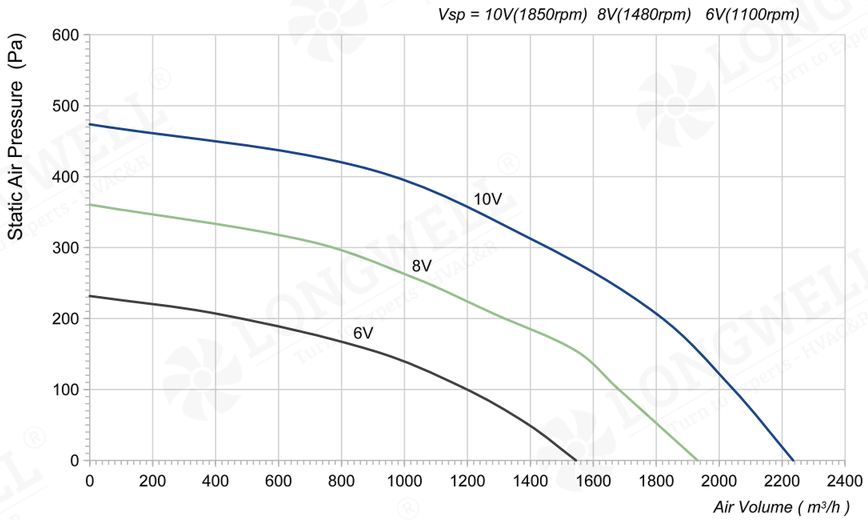

LWBE3G310-92NS-20 (without bracket)

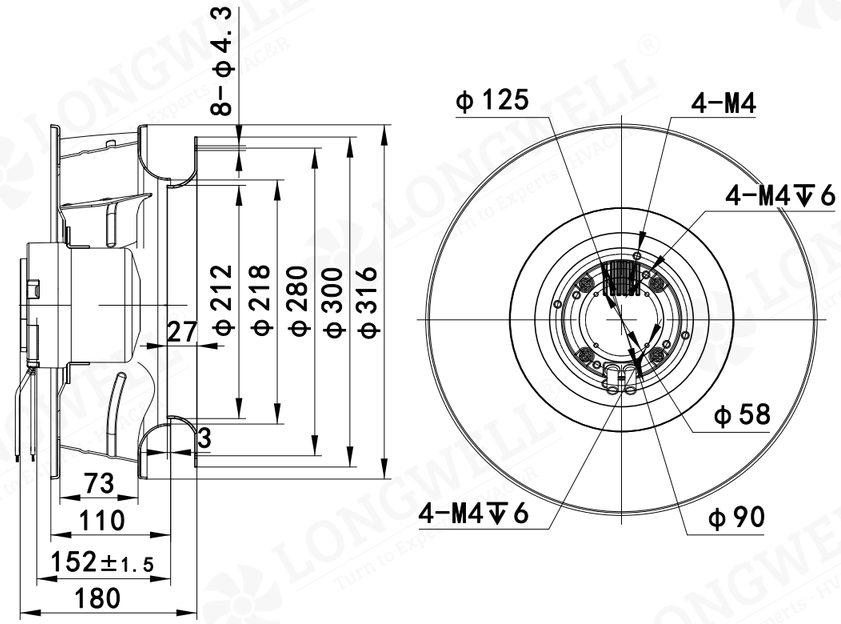

LWBE3G310-92PS-11 (with bracket)

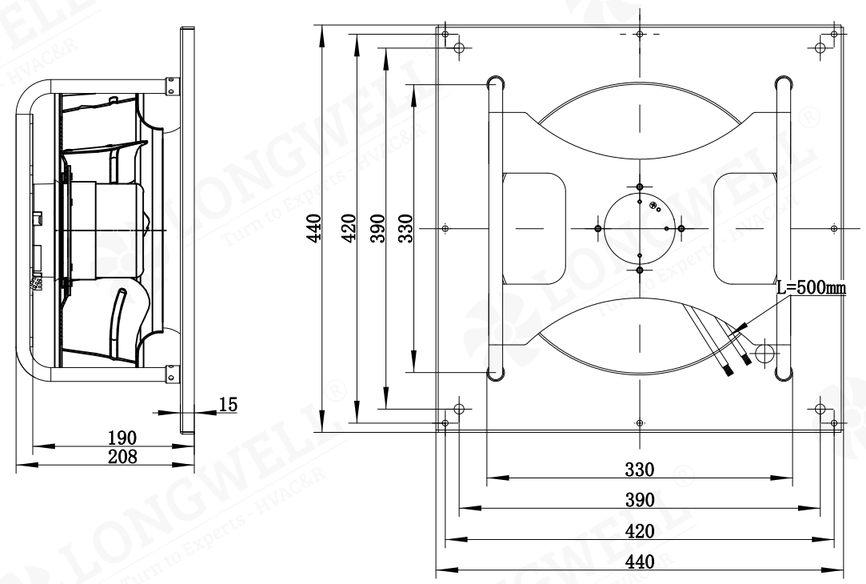

Ningbo Longwell Electric Technology Co., Ltd
https://www.longwellfans.com Email:sales@zjlongwell.com

LWBE-310 Serise




Product Characteristic


- Impeller Material: Aluminum Alloy
- Supply Voltage: 230V/115V,50/60Hz
- Mode of Operation: S1
- Protection Class: IP54
- Insulation Class: F
- Operation Temperature: -25℃～+60℃
- Technical Feature: Control input 0-10VDC/PWM,Tach output,Locked-Rotor protection,Reverse Polarity Over-voltage protection,Soft Start Protection.


Technical Specifications

Model	Voltage (V)	Input Power (W)	Current (A)	Air Volume (m^3/h)	Static Pressure (Pa)	Speed (RPM)	Noise [dB(A)]
LWBE3G310-102PS-02	230	285	1.57	2869	630	2150	70

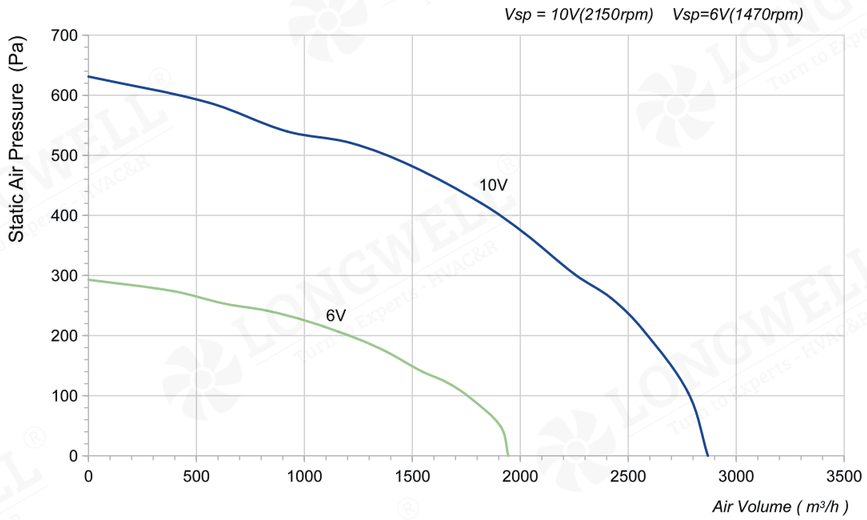



LWBE3G310-102NS-16 (without bracket)

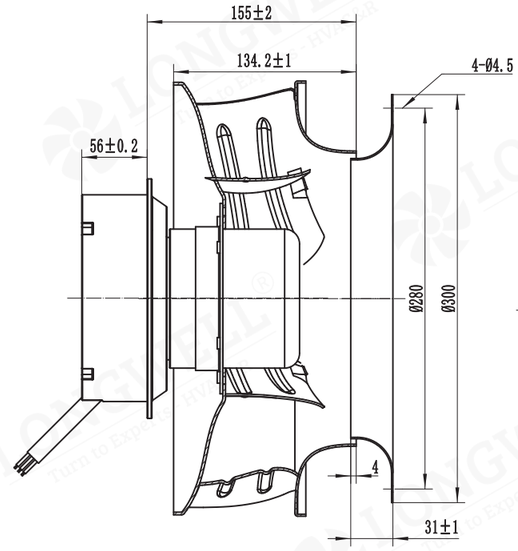

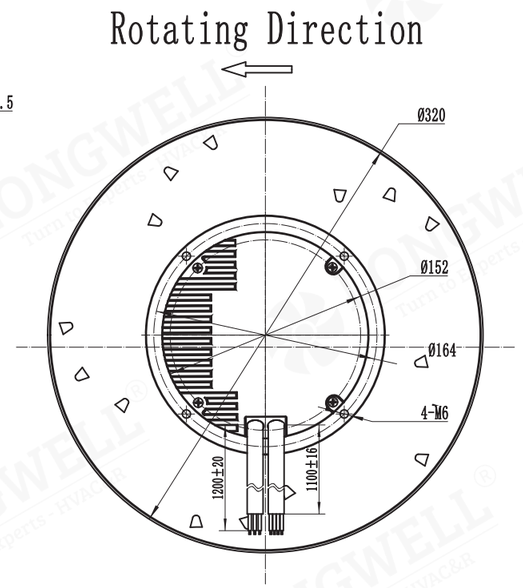

LWBE3G310-102PS-02 (with bracket)

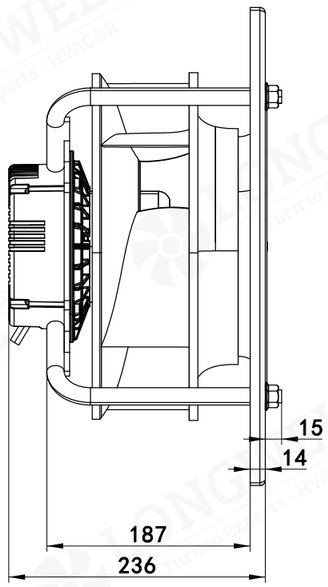

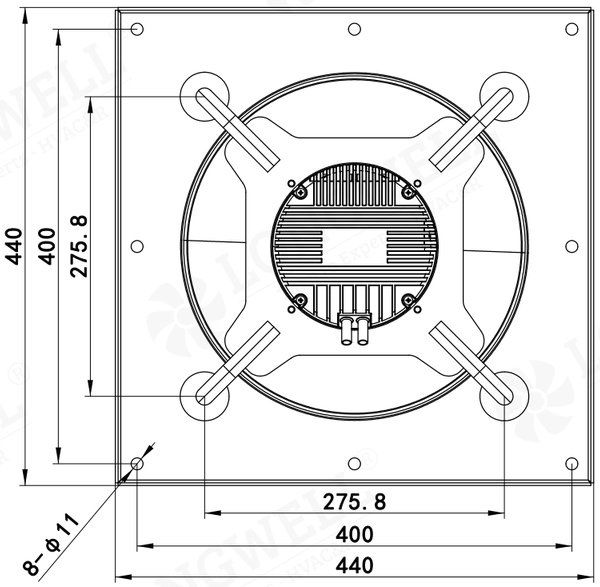

Ningbo Longwell Electric Technology Co., Ltd
https://www.longwellfans.com Email:sales@zjlongwell.com

LWBE-310 Serise




Product Characteristic


- Impeller Material: Aluminum Alloy
- Supply Voltage: 230V/115V,50/60Hz
- Mode of Operation: S1
- Protection Class: IP54
- Insulation Class: F
- Operation Temperature: -25℃～+60℃
- Technical Feature: Control input 0-10VDC/PWM,Tach output,Locked-Rotor protection,Reverse Polarity Over-voltage protection,Soft Start Protection.

Technical Specifications


Model	Voltage (V)	Input Power (W)	Current (A)	Air Volume (m^3/h)	Static Pressure (Pa)	Speed (RPM)	Noise [dB(A)]
LWBE3G310-102PS-15	230	370	2.6	2936	700	2300	76

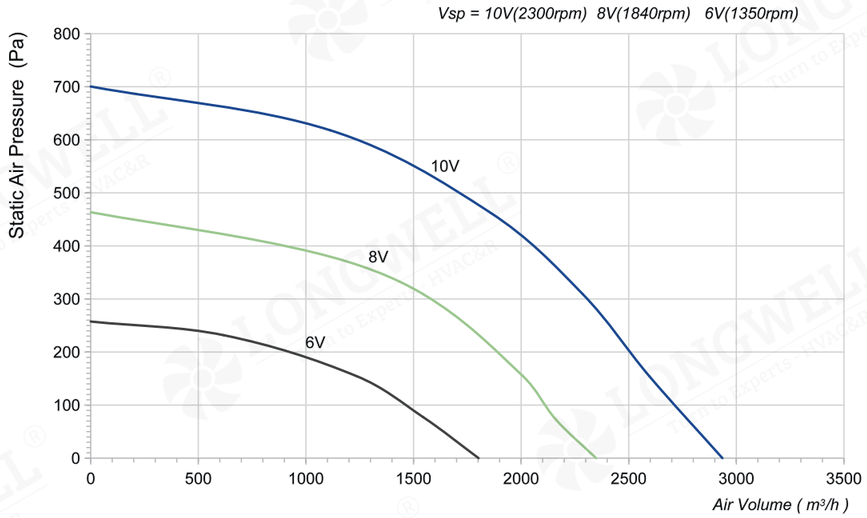

LWBE3G310-102NS-19 (without bracket)

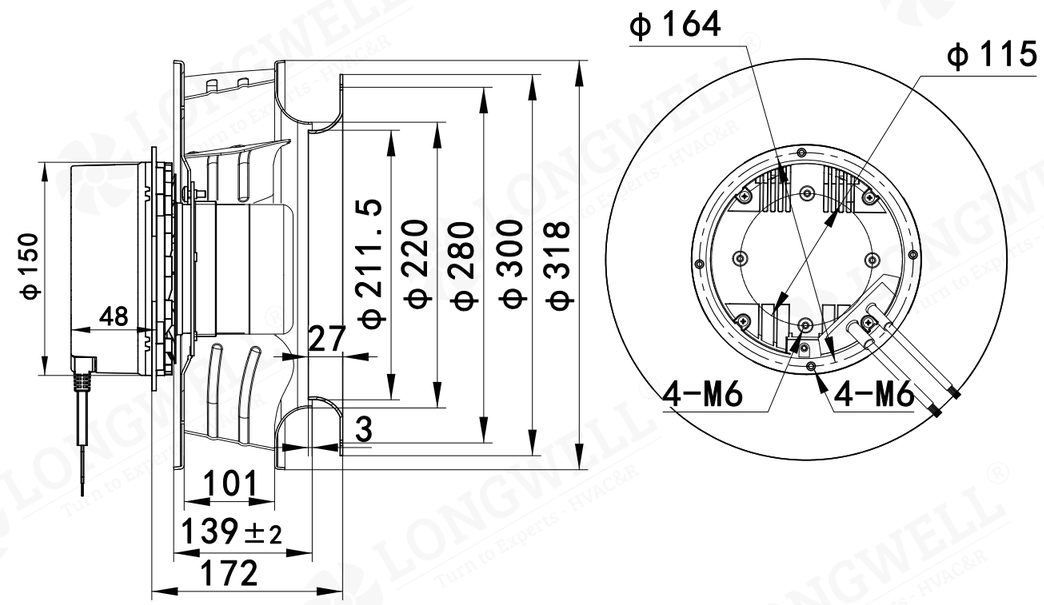

LWBE3G310-102PS-15 (with bracket)

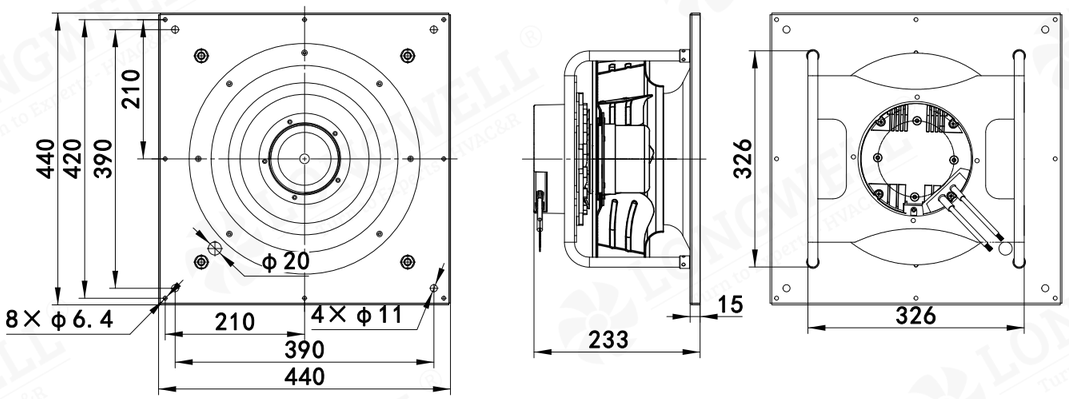

Ningbo Longwell Electric Technology Co., Ltd
https://www.longwellfans.com Email:sales@zjlongwell.com

LWBE-310 Serise




Product Characteristic


- Impeller Material: Aluminum Alloy
- Supply Voltage: 230V/115V,50/60Hz
- Mode of Operation: S1
- Protection Class: IP44
- Insulation Class: F
- Operation Temperature: -25℃～+60℃
- Technical Feature: Control input 0-10VDC/PWM,Tach output,Locked-Rotor protection,Reverse Polarity Over-voltage protection,Soft Start Protection.


Technical Specifications

Model	Voltage (V)	Input Power (W)	Current (A)	Air Volume (m^3/h)	Static Pressure (Pa)	Speed (RPM)	Noise [dB(A)]
LWBE3G310-102PS-16	230	450	3	2884	963	2600	78

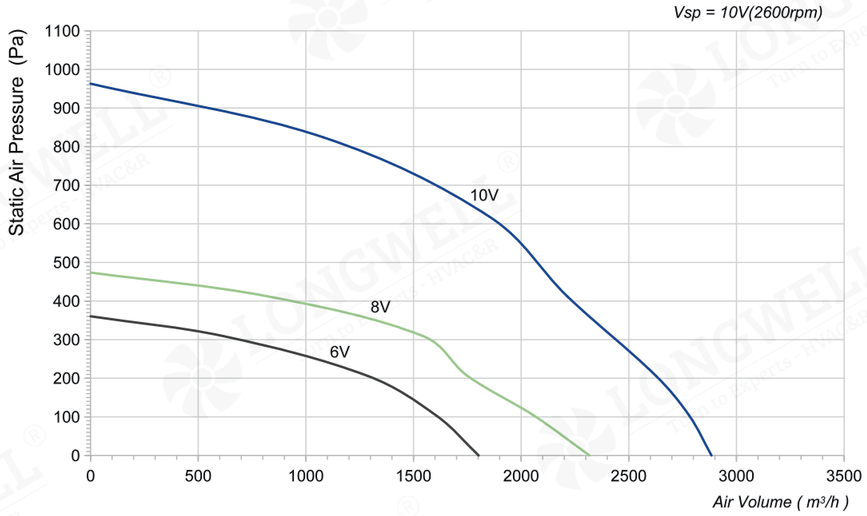



LWBE3G310-102NS-18 (without bracket)

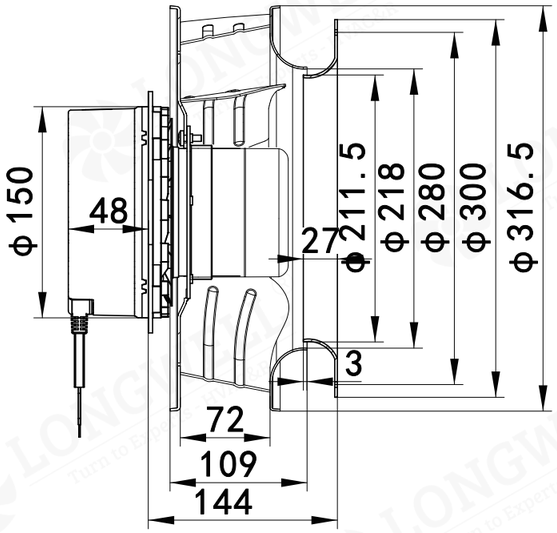


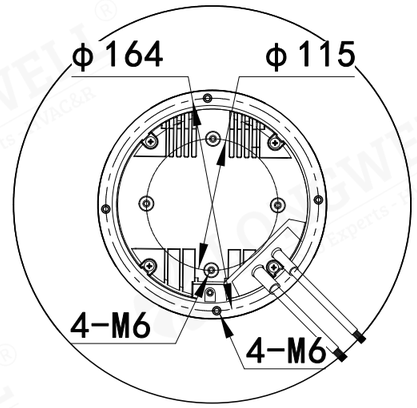

LWBE3G310-102PS-16 (with bracket)

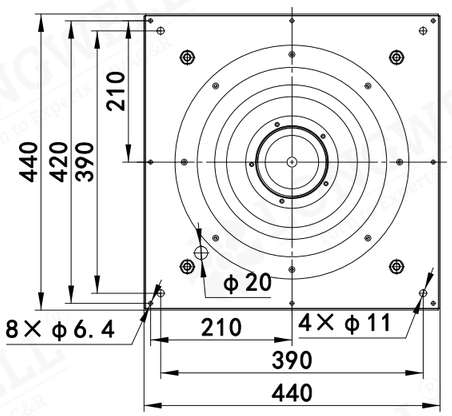

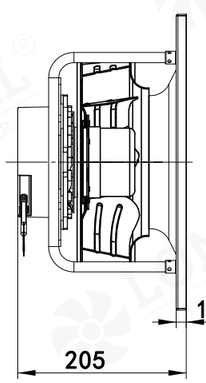



Ningbo Longwell Electric Technology Co., Ltd
https://www.longwellfans.com Email:sales@zjlongwell.com

LWBE-310 Serise




Product Characteristic


- Impeller Material: Aluminum Alloy
- Supply Voltage: 400V,50/60Hz
- Mode of Operation: S1
- Protection Class: IP44
- Insulation Class: F
- Operation Temperature: -25℃～+60℃
- Technical Feature: Control input 0-10VDC/PWM,Tach output,Locked-Rotor protection,Reverse Polarity Over-voltage protection,Soft Start Protection.

Technical Specifications


Model	Voltage (V)	Input Power (W)	Current (A)	Air Volume (m^3/h)	Static Pressure (Pa)	Speed (RPM)	Noise [dB(A)]
LWBE3G310-138PT-04	400	980	1.64	4398	824	2600	74

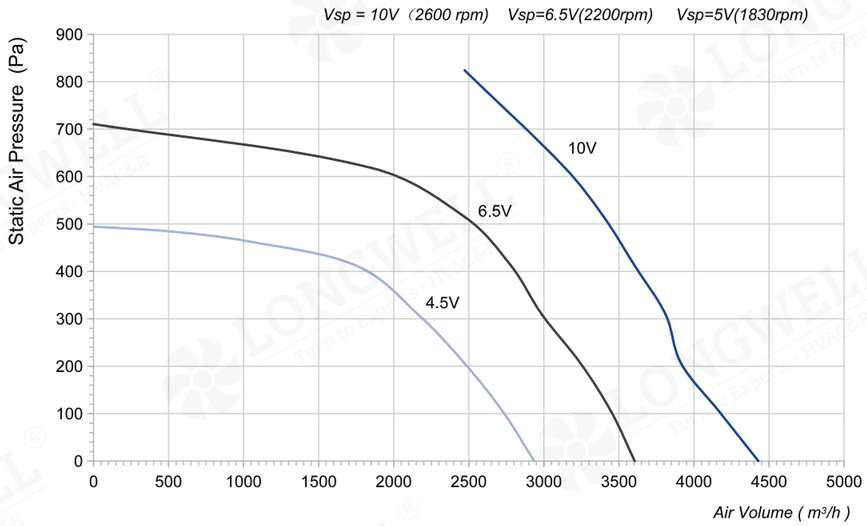

LWBE3G310-138NT-05 (without bracket)

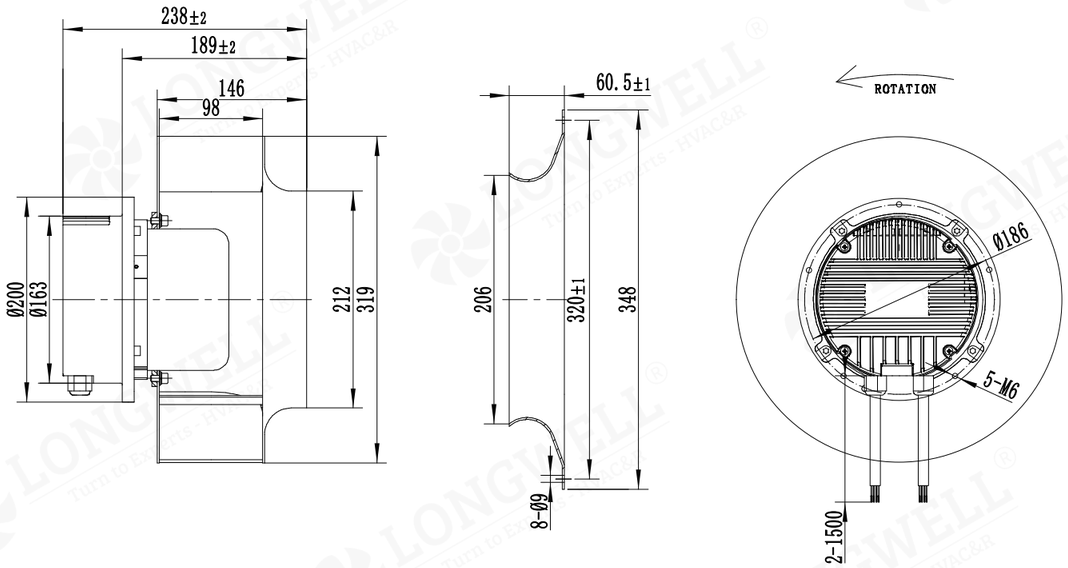

LWBE3G310-138PT-04 (with bracket)

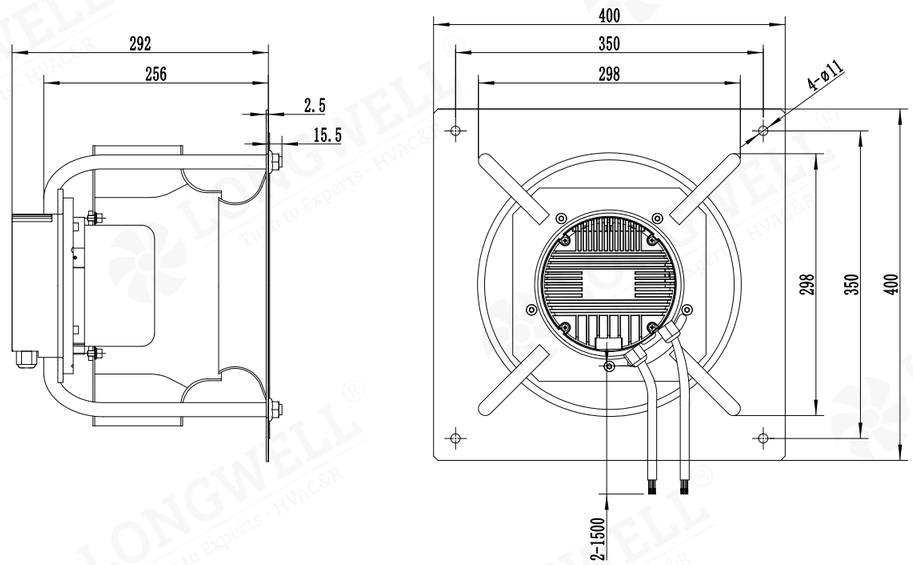

Ningbo Longwell Electric Technology Co., Ltd
https://www.longwellfans.com Email:sales@zjlongwell.com

LWBE-310 Serise




Product Characteristic


- Impeller Material: Aluminum Alloy
- Supply Voltage: 400V,50/60Hz
- Mode of Operation: S1
- Protection Class: IP44
- Insulation Class: F
- Operation Temperature: -25℃～+60℃
- Technical Feature: Control input 0-10VDC/PWM,Tach output,Locked-Rotor protection,Reverse Polarity Over-voltage protection,Soft Start Protection.

Technical Specifications

Model	Voltage (V)	Input Power (W)	Current (A)	Air Volume (m^3/h)	Static Pressure (Pa)	Speed (RPM)	Noise [dB(A)]
LWBE3G310-138PT-10	400	1588	2.4	5593	1082	3300	92

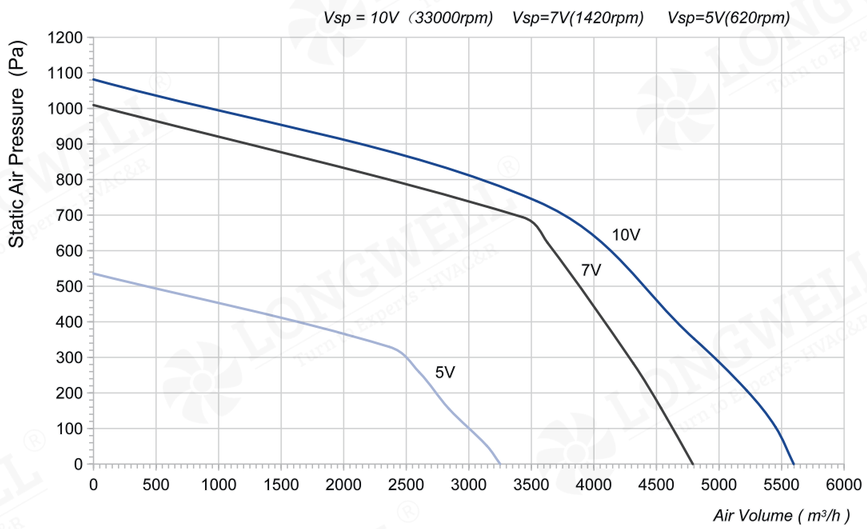

LWBE3G310-138NT-25 (without bracket)

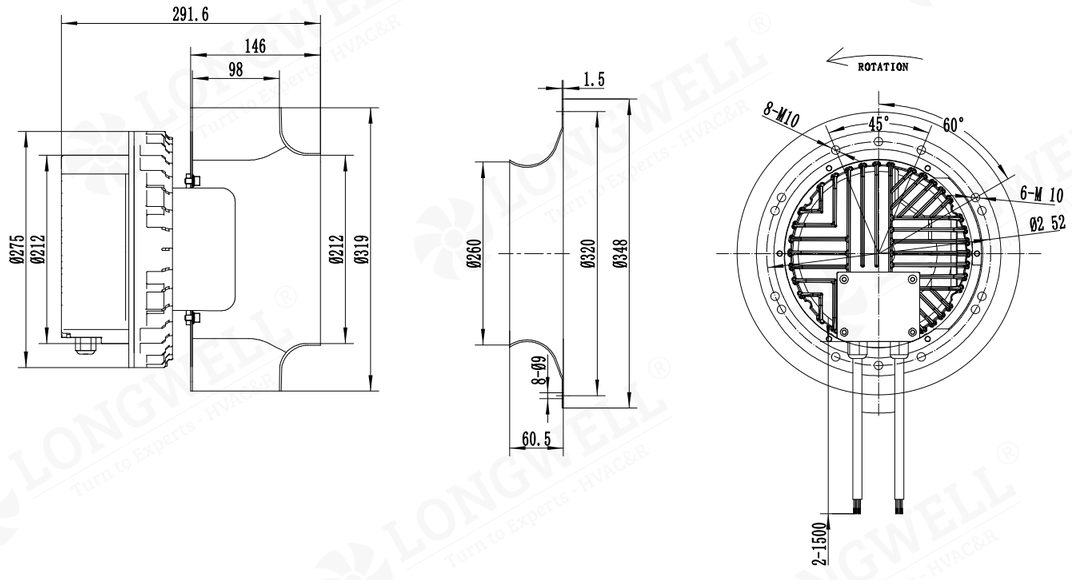

LWBE3G310-138PT-10 (with bracket)

