Ningbo Longwell Electric Technology Co., Ltd
https://www.longwellfans.com Email:sales@zjlongwell.com

LWAE-350 Serise




Product Characteristic


- Material : PA66
- Type of Protection: IP54
- Insulation Class: B
- Motor Type: BLEC Motor
- Operation Temperature: -25℃～+60℃
- Technical Feature: Control input 0-10VDC/PWM,Tach output,Locked-Rotor protection,Reverse Polarity, Over-voltage Protection,Soft Start Protection

Technical Specifications


Model	Voltage (V)	Frequency (Hz)	Current (A)	Power [W(@0Pa)]	Speed (RPM)	Air Volume (m³/h)	Noise [dB(A)]
LWAE3G350SS-5PNW-01	220	50/60	1.2	175	1800	3451	65
LWAE3G350ST-5PNW-02	220	50/60	1.2	175	1800	3451	65
LWAE3G350SS-5PEW-03	220	50/60	1.2	175	1800	3451	65
LWAE3G350ST-5PEW-04	220	50/60	1.2	175	1800	3451	65
LWAE3G350SS-5PGW-05	220	50/60	1.2	175	1800	3451	65
LWAE3G350ST-5PGW-06	220	50/60	1.2	175	1800	3451	65

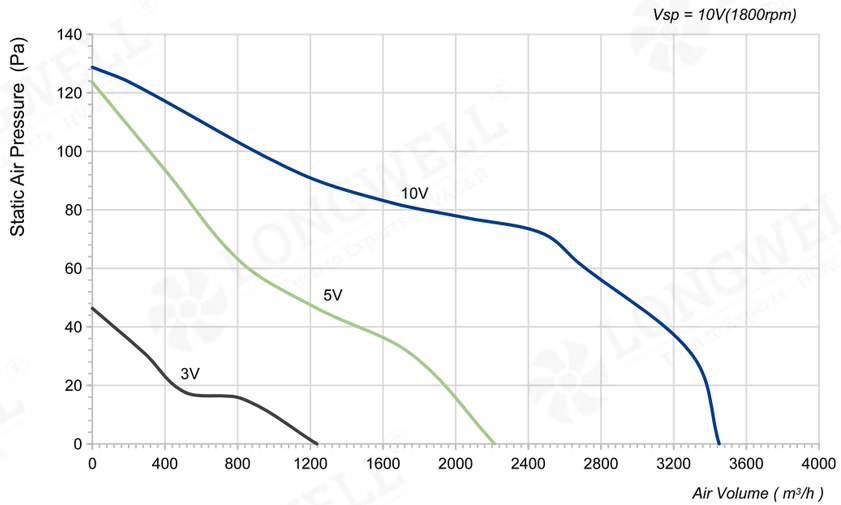


LWAE3G350SS-5PNW-01(Suction)

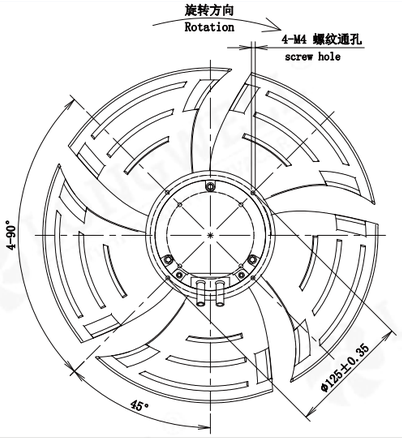


LWAE3G350ST-5PNW-02(Blowing)

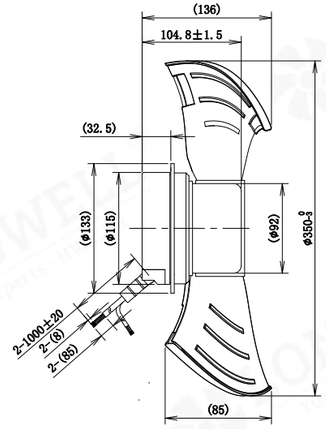


LWAE3G350SS-5PEW-03(Suction)

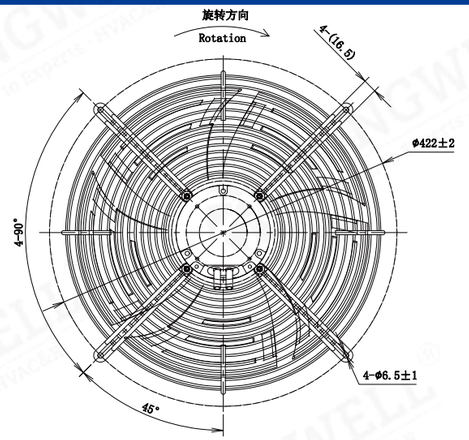


LWAE3G350ST-5PEW-04(Blowing)

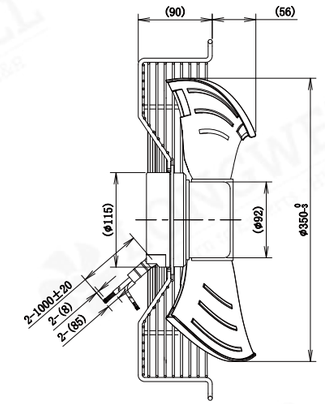


LWAE3G350SS-5PGW-05(Suction)

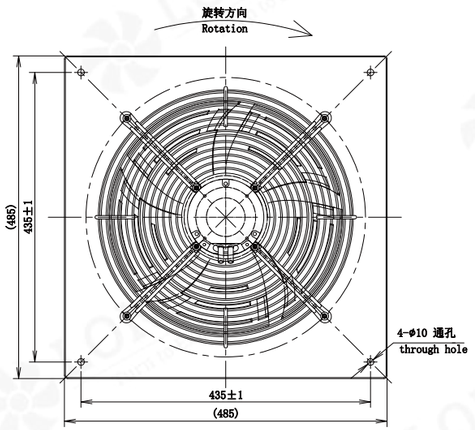

LWAE3G350ST-5PGW-06(Blowing)

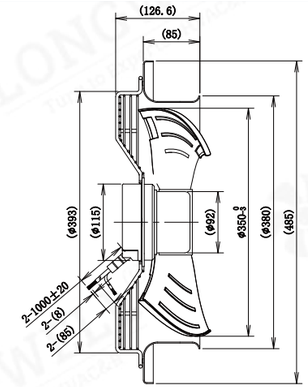

LWAE-350 Serise

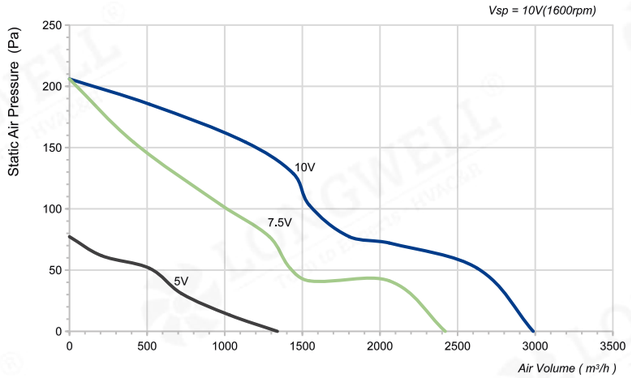




Product Characteristic


- Material : Sheet Steel
- Type of Protection: IP54
- Insulation Class: B
- Motor Type: BLEC Motor
- Operation Temperature: -25℃～+60℃
- Technical Features: Control input 0-10VDC/PWM
- Protection: Tach output,Locked-Rotor protection,Reverse Polarity,Over-voltage Protection,Soft Start Protection

CE RoHS ETL BSCI ISO EAC UL LVD


Technical Specifications

Model	Voltage (V)	Frequency (Hz)	Current (A)	Power [W(@0Pa)]	Speed (RPM)	Air Volume (m³/h)	Noise [dB(A)]
LWAE3G350SS-5MEW-07	220	50/60	1.0	150	1600	2884	66
LWAE3G350ST-5MEW-08	220	50/60	1.0	150	1600	2884	66

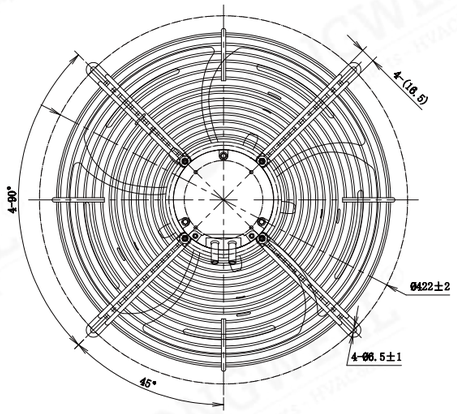

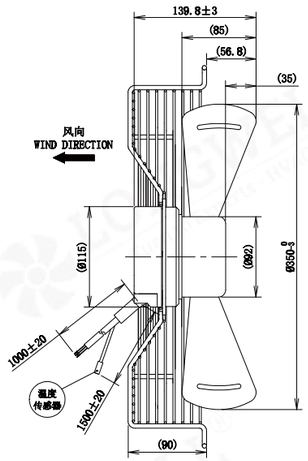

LWAE-350 Serise

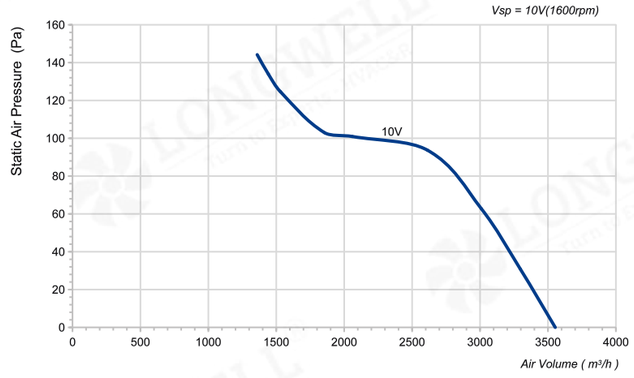



Product Characteristic

- Material : PA66
- Type of Protection: IP54
- Insulation Class: F
- Motor Type: BLEC Motor
- Operation Temperature: -25℃～+60℃
- Technical Features: Control input 0-10VDC/PWM
- Protection: Tach output,Locked-Rotor protection,Reverse Polarity,Over-voltage Protection,Soft Start Protection

CE RoHS ETL BSCI ISO EAC UL LVD

Technical Specifications

Model	Voltage (V)	Frequency (Hz)	Current (A)	Power [W(@0Pa)]	Speed (RPM)	Air Volume (m³/h)	Noise [dB(A)]
LWAE3G350SS-5PEW-09	230	50/60	1.11	164	1600	3554	62

