
LWBE-355 Serise



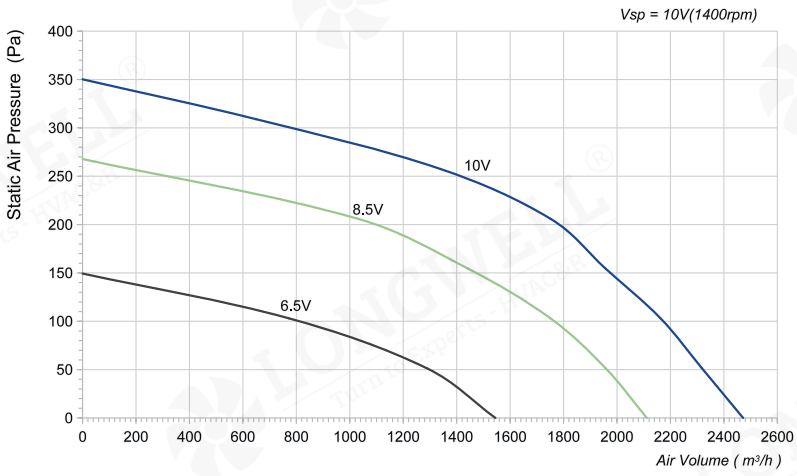

Product Characteristic


Impeller Material:	Aluminum Alloy	Supply Voltage:	230V,50/60Hz
Direction of Rotation:	Clockwise,seen on rotor	Mode of Operation:	S1
Protection Class:	IP44	Insulation Class:	B
Mounting Position:	Horizontal or Vertical	Operation Temperature:	-25℃～+60℃
Bearing:	Maintenance-free ball bearings	Technical Features:	Control input 0-10VDC/PWM

- Protection: Tach output,Locked-Rotor protection Reverse Polarity,Over-voltage protection,Soft Start


CE RoHS compliant Intertek BSCI ISO EAC UL LVD

Technical Specifications

Model	Voltage (V)	Input Power (W)	Current (A)	Air Volume (m³/h)	Static Pressure (Pa)	Speed (RPM)	Noise [dB(A)]
LWBE3G355-092NS-19	230	120	0.9	2472	350	1400	68

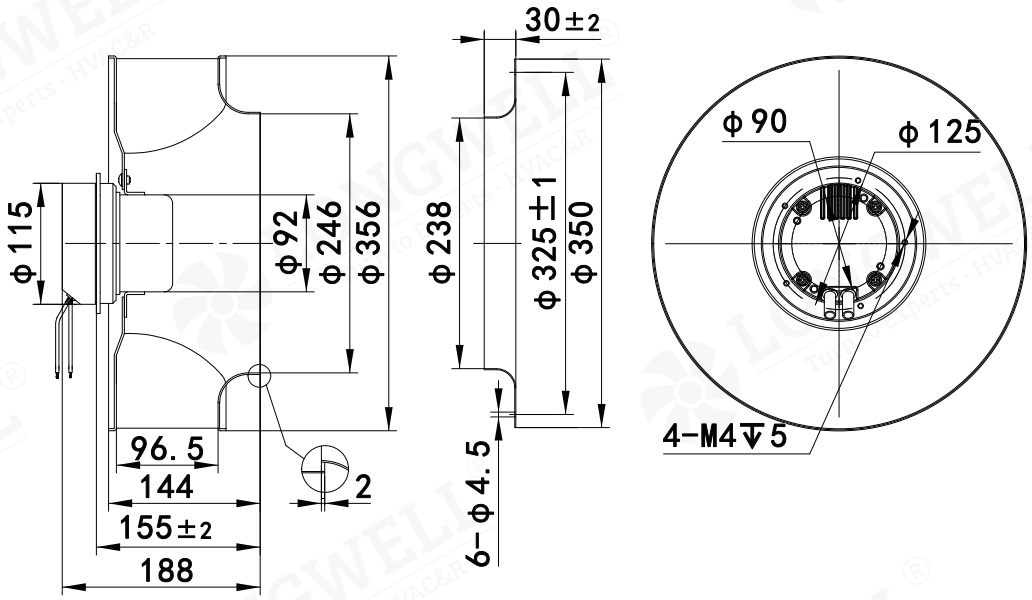

LWBE-355 Serise

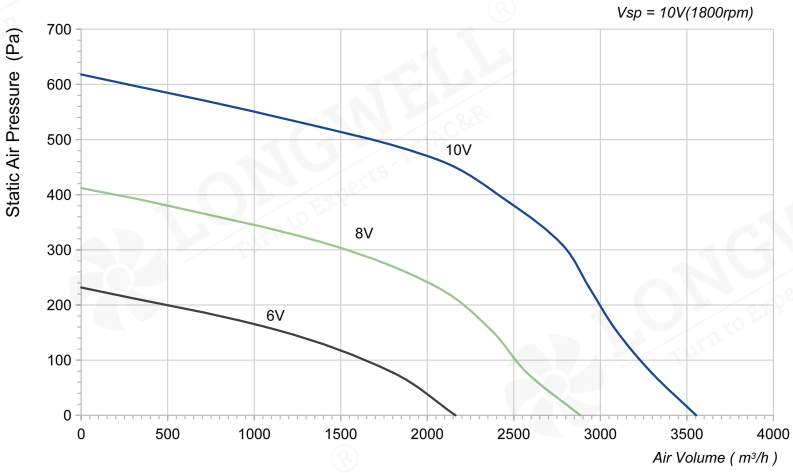





Product Characteristic

- Impeller Material: Aluminum Alloy
- Supply Voltage: 230V,50/60Hz
- Direction of Rotation: Clockwise,seen on rotor
- Mode of Operation: S1
- Protection Class: IP44
- Insulation Class: F
- Mounting Position: Horizontal or Vertical
- Operation Temperature: -25℃～+60℃
- Bearing: Maintenance-free ball bearings
- Technical Features: Control input 0-10VDC/PWM
- Protection: Tach output,Locked-Rotor protection Reverse Polarity,Over-voltage protection,Soft Start


Technical Specifications

Model	Voltage (V)	Input Power (W)	Current (A)	Air Volume (m³/h)	Static Pressure (Pa)	Speed (RPM)	Noise [dB(A)]
LWBE3G355-102NS-20	230	285	2	3554	618	1800	76

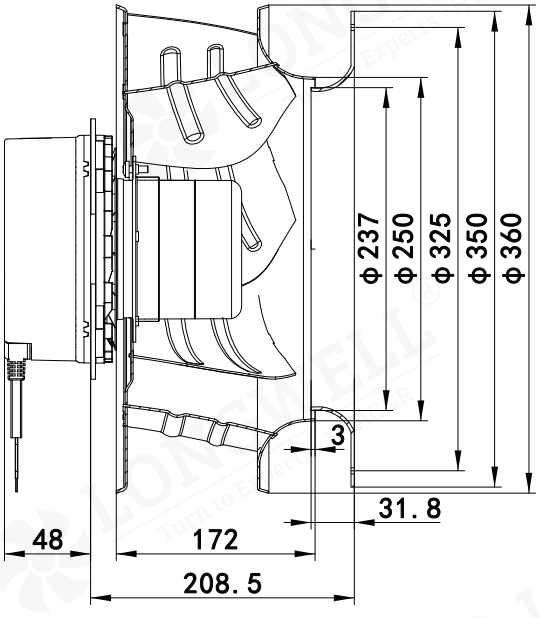

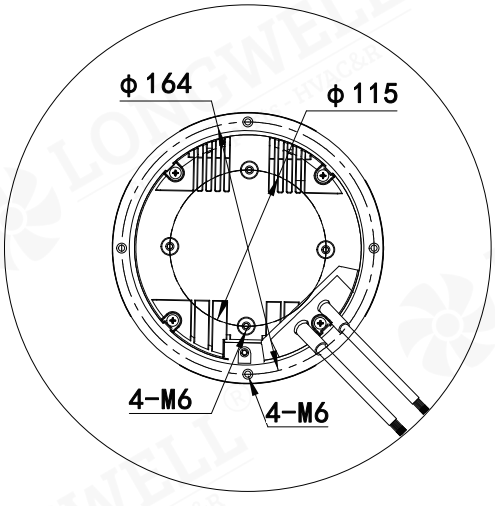

LWBE-355 Serise

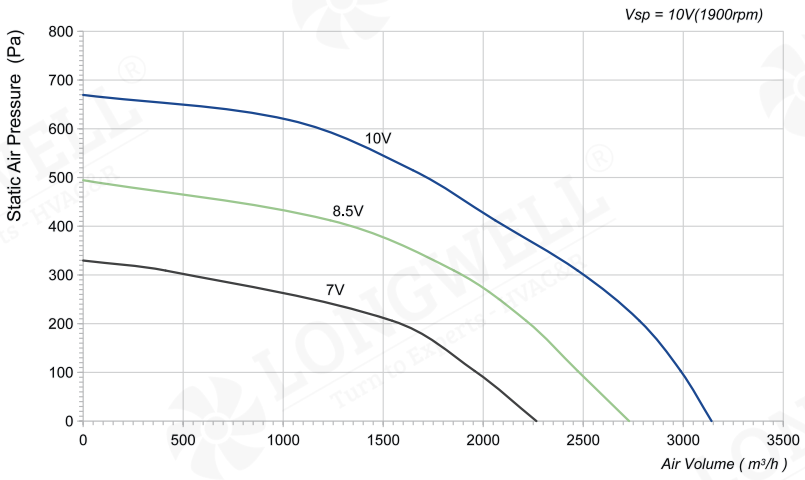




Product Characteristic

Impeller Material:	Aluminum Alloy	Supply Voltage:	230V,50/60Hz
Direction of Rotation:	Clockwise,seen on rotor	Mode of Operation:	S1
Protection Class:	IP54	Insulation Class:	B
Mounting Position:	Horizontal or Vertical	Operation Temperature:	-25℃～+60℃
Bearing:	Maintenance-free ball bearings	Technical Features:	Control input 0-10VDC/PWM


- Protection: Tach output,Locked-Rotor protection Reverse Polarity,Over-voltage protection,Soft Start

Technical Specifications

Model	Voltage (V)	Input Power (W)	Current (A)	Air Volume (m³/h)	Static Pressure (Pa)	Speed (RPM)	Noise [dB(A)]
LWBE3G355-102NS-21	230	330	1.5	3142	670	1900	77

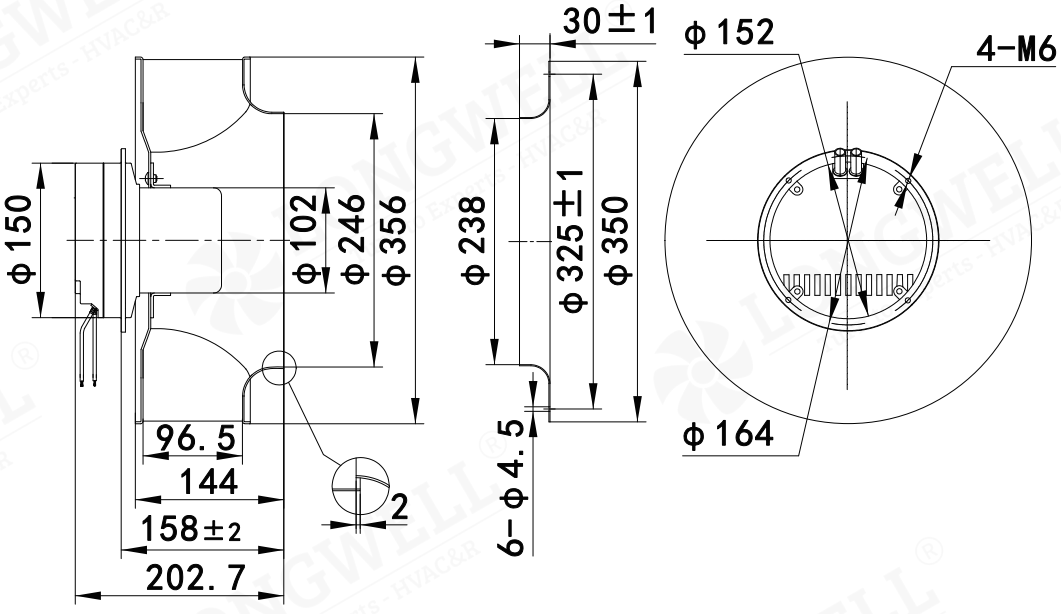

LWBE-355 Serise

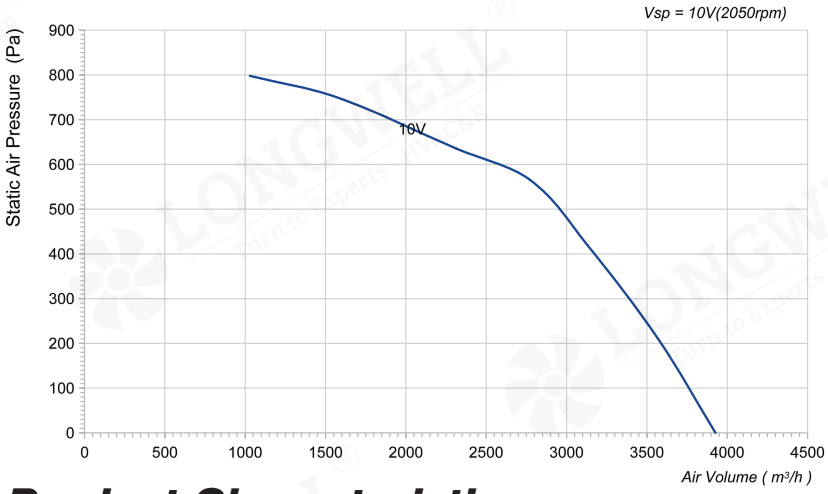




Product Characteristic


• Impeller Material:	Aluminum Alloy	• Supply Voltage:	230V,50/60Hz
• Direction of Rotation:	Clockwise,seen on rotor	• Mode of Operation:	S1
• Protection Class:	IP54	• Insulation Class:	F
• Mounting Position:	Horizontal or Vertical	• Operation Temperature:	-25℃～+60℃
• Bearing:	Maintenance-free ball bearings	• Technical Features:	Control input 0-10VDC/PWM

• Protection: Tach output,Locked-Rotor protection Reverse Polarity,Over-voltage protection,Soft Start


Technical Specifications

Model	Voltage (V)	Input Power (W)	Current (A)	Air Volume (m³/h)	Static Pressure (Pa)	Speed (RPM)	Noise [dB(A)]
LWBE3G355-102NS-15	230	498	5.3	3915	770	2050	/

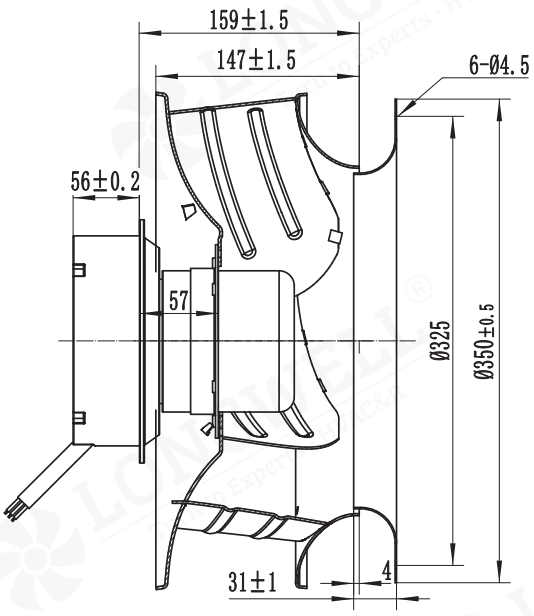

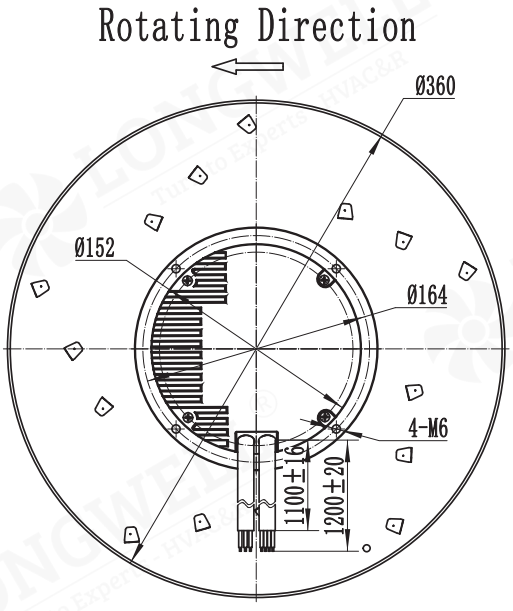

LWBE-355 Serise

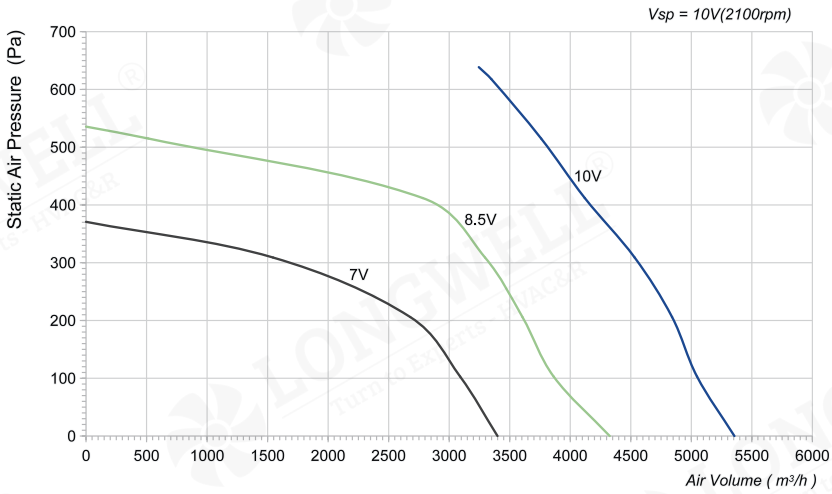



Product Characteristic


Impeller Material:	Aluminum Alloy	Supply Voltage:	400V,50/60Hz
Direction of Rotation:	Clockwise,seen on rotor	Mode of Operation:	S1
Protection Class:	IP44	Insulation Class:	F
Mounting Position:	Horizontal or Vertical	Operation Temperature:	-25℃～+60℃
Bearing:	Maintenance-free ball bearings	Technical Features:	Control input 0-10VDC/PWM

- Protection: Tach output,Locked-Rotor protection Reverse Polarity,Over-voltage protection,Soft Start


CE RoHS compliant ETL Intertek BSCI ISO EAC UL LVD

Technical Specifications

Model	Voltage (V)	Input Power (W)	Current (A)	Air Volume (m³/h)	Static Pressure (Pa)	Speed (RPM)	Noise [dB(A)]
LWBE3G355-138NT-17	400	990	1.63	5356	639	2100	79

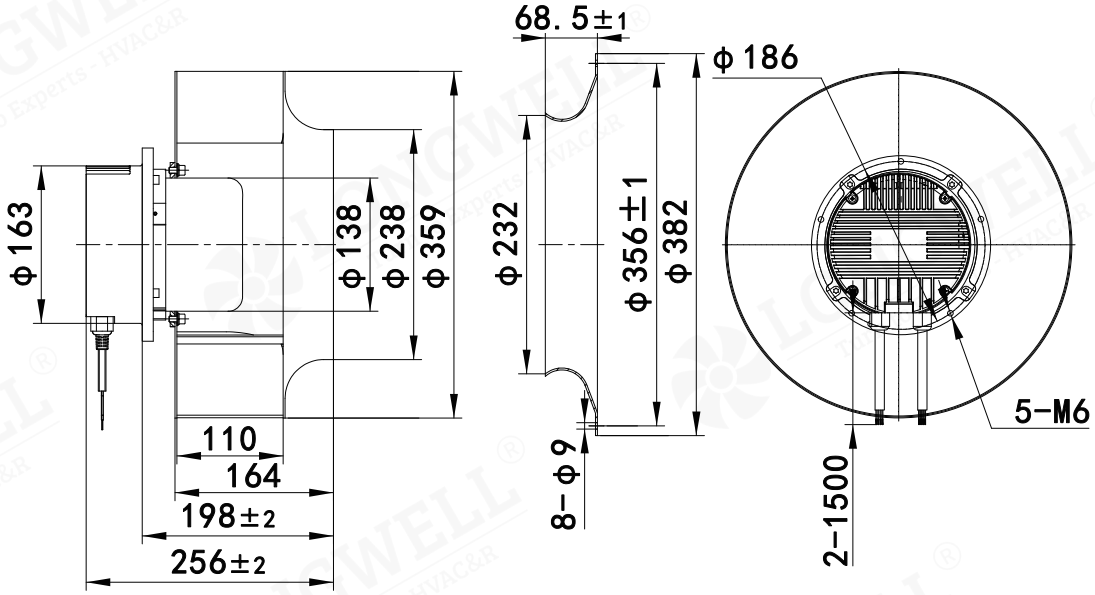

LWBE-355 Serise

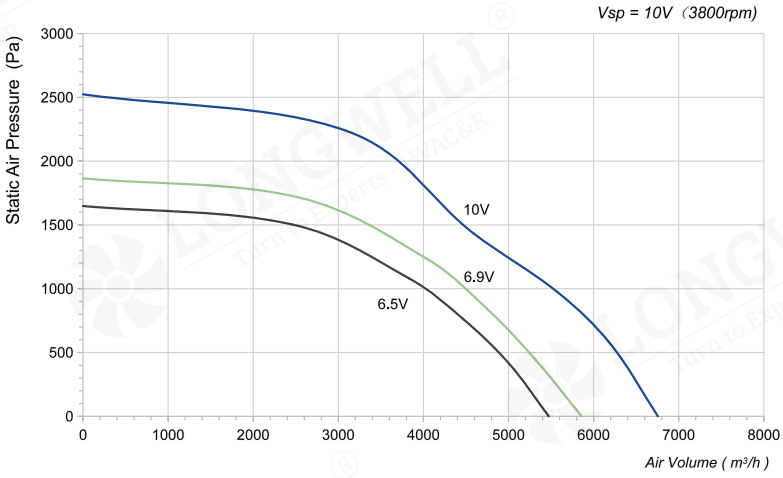




Product Characteristic


• Impeller Material:	Aluminum Alloy	• Supply Voltage:	380V,50/60Hz
• Direction of Rotation:	Clockwise,seen on rotor	• Mode of Operation:	S1
• Protection Class:	IP44	• Insulation Class:	F
• Mounting Position:	Horizontal or Vertical	• Operation Temperature:	-30℃～+60℃
• Bearing:	Maintenance-free ball bearings	• Technical Features:	Control input 0-10VDC/PWM


• Protection: Tach output,Locked-Rotor protection Reverse Polarity,Over-voltage protection,Soft Start

Technical Specifications


Model	Voltage (V)	Input Power (W)	Current (A)	Air Volume (m³/h)	Static Pressure (Pa)	Speed (RPM)	Noise [dB(A)]
LWBE3G355-188NT-29	380	3100	5.2	6756	2524	3800	96

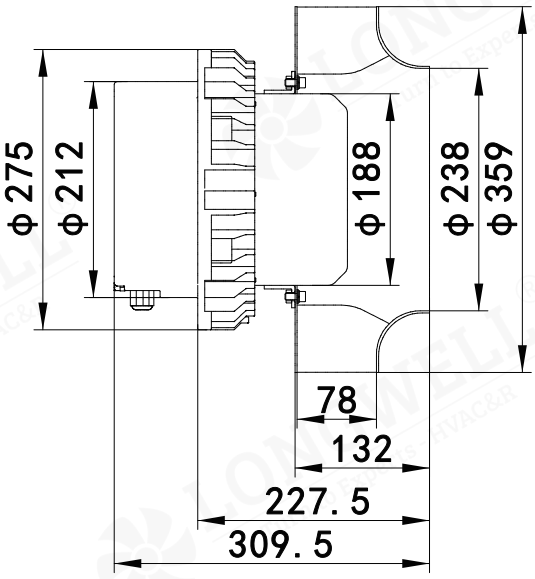

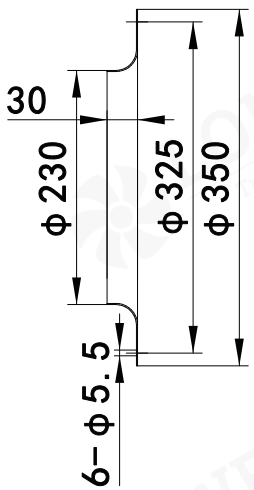

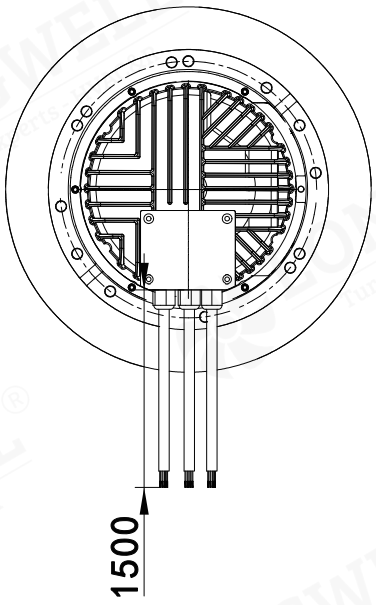

LWBE-355 Serise

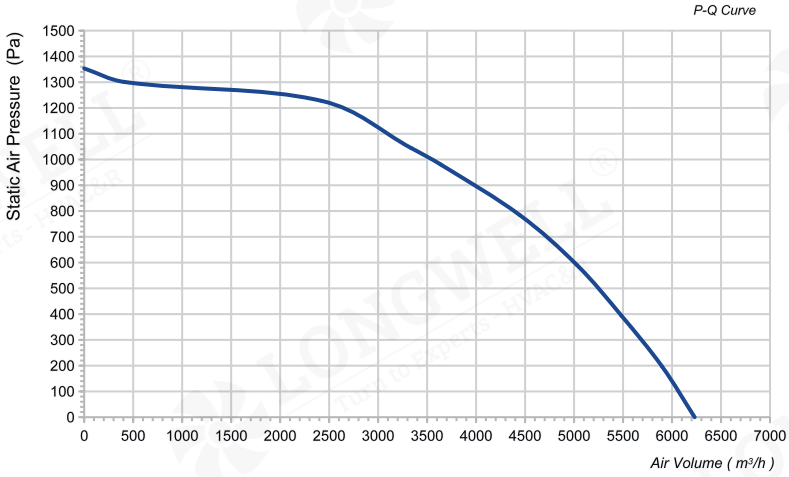



Product Characteristic


Impeller Material:	Aluminum Alloy	Supply Voltage:	400V,50/60Hz
Direction of Rotation:	Clockwise,seen on rotor	Mode of Operation:	S1
Protection Class:	IP54	Insulation Class:	F
Mounting Position:	Horizontal or Vertical	Operation Temperature:	-25℃～+60℃
Bearing:	Maintenance-free ball bearings	Technical Features:	Control input 0-10VDC/PWM

- Protection: Tach output,Locked-Rotor protection Reverse Polarity,Over-voltage protection,Soft Start


CE RoHS compliant Intertek BSCI ISO EAC UL LVD

Technical Specifications

Model	Voltage (V)	Input Power (W)	Current (A)	Air Volume (m³/h)	Static Pressure (Pa)	Speed (RPM)	Noise [dB(A)]
LWBE3G355-138NT-27	400	1500	3.6	6249	1353	2710	77

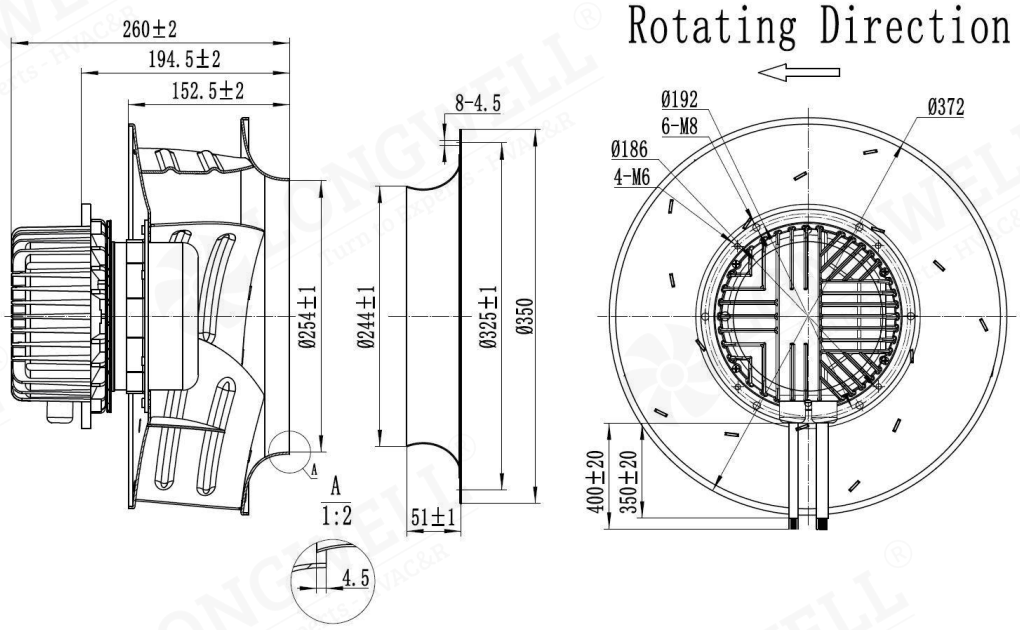

LWBE-355 Serise

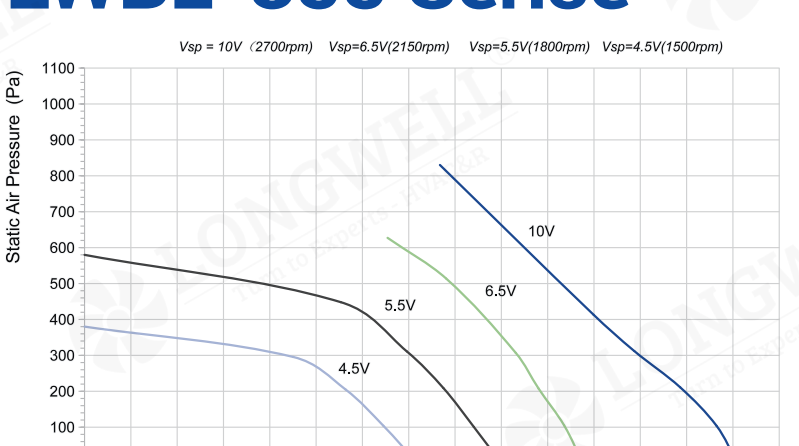




Product Characteristic


- Impeller Material: Aluminum Alloy
- Supply Voltage: 400V,50/60Hz
- Direction of Rotation: Clockwise,seen on rotor
- Mode of Operation: S1
- Protection Class: IP54
- Insulation Class: F
- Mounting Position: Horizontal or Vertical
- Operation Temperature: -25℃～+60℃
- Bearing: Maintenance-free ball bearings
- Technical Features: Control input 0-10VDC/PWM
- Protection: Tach output,Locked-Rotor protection Reverse Polarity,Over-voltage protection,Soft Start

Technical Specifications

Model	Voltage (V)	Input Power (W)	Current (A)	Air Volume (m³/h)	Static Pressure (Pa)	Speed (RPM)	Noise [dB(A)]
LWBE3G355-138NT-12	400	1700	2.8	7045	830	2700	81

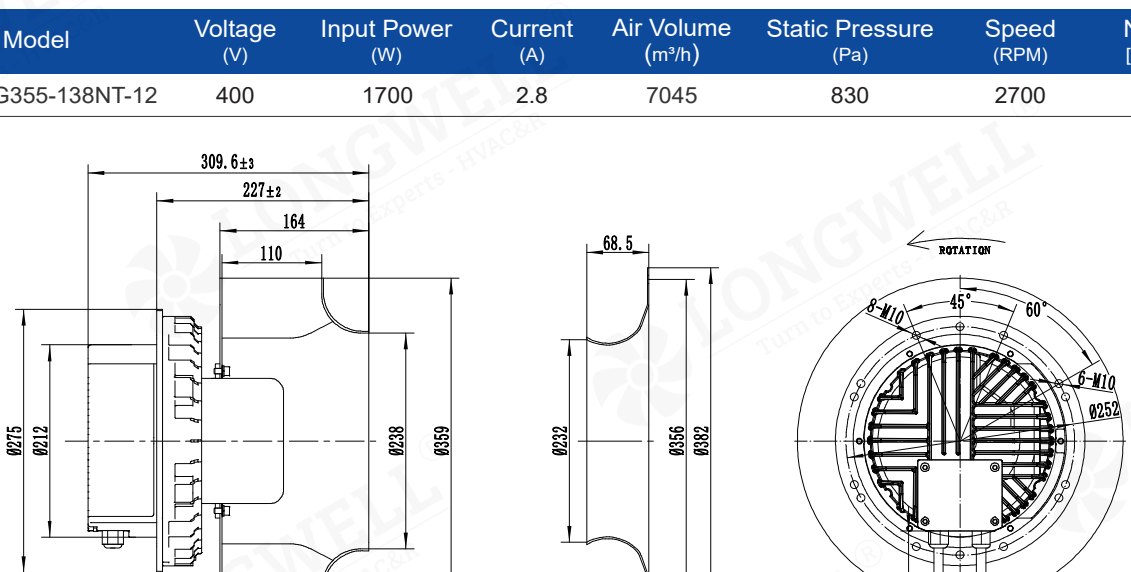

LWBE-355 Serise

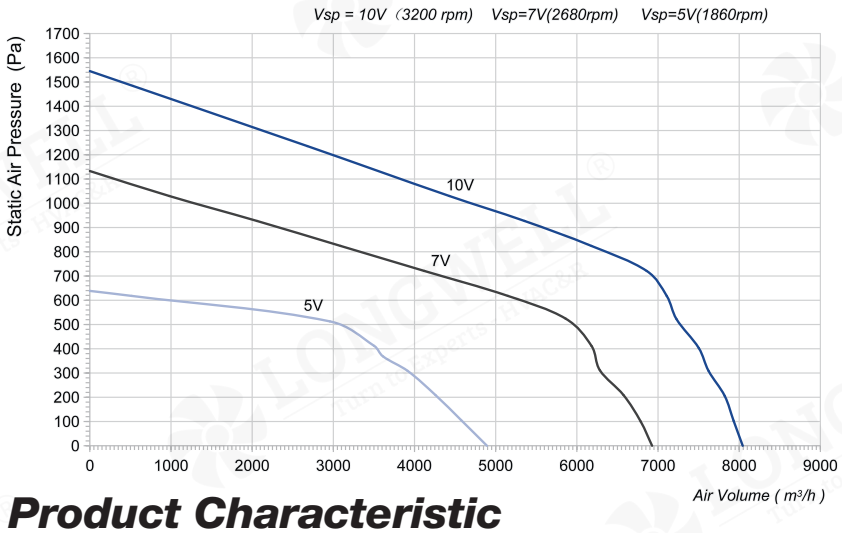



Product Characteristic

- Impeller Material: Aluminum Alloy
- Supply Voltage: 400V,50/60Hz
- Direction of Rotation: Clockwise,seen on rotor
- Mode of Operation: S1
- Protection Class: IP54
- Insulation Class: F
- Mounting Position: Horizontal or Vertical
- Operation Temperature: -25℃～+60℃
- Bearing: Maintenance-free ball bearings
- Technical Features: Control input 0-10VDC/PWM
- Protection: Tach output,Locked-Rotor protection Reverse Polarity,Over-voltage protection,Soft Start

Technical Specifications

Model	Voltage (V)	Input Power (W)	Current (A)	Air Volume (m³/h)	Static Pressure (Pa)	Speed (RPM)	Noise [dB(A)]
LWBE3G355-188NT-26	400	3090	4.2	8034	1545	3200	96

