Ningbo Longwell Electric Technology Co., Ltd
https://www.longwellfans.com Email:sales@zjlongwell.com

LWBE-450 Serise




Product Characteristic


- Impeller Material: Aluminum Alloy
- Supply Voltage: 400V,50/60Hz
- Mode of Operation: S1
- Protection Class: IP54
- Insulation Class: F
- Operation Temperature: -25℃～+60℃
- Technical Feature: Control input 0-10VDC/PWM,Tach output,Locked-Rotor protection,Reverse Polarity Over-voltage protection,Soft Start Protection.

Technical Specifications


Model	Voltage (V)	Input Power (W)	Current (A)	Air Volume (m^3/h)	Static Pressure (Pa)	Speed (RPM)	Noise [dB(A)]
LWBE3G450-138PT-12	400	386	/	5329	452	1200	/

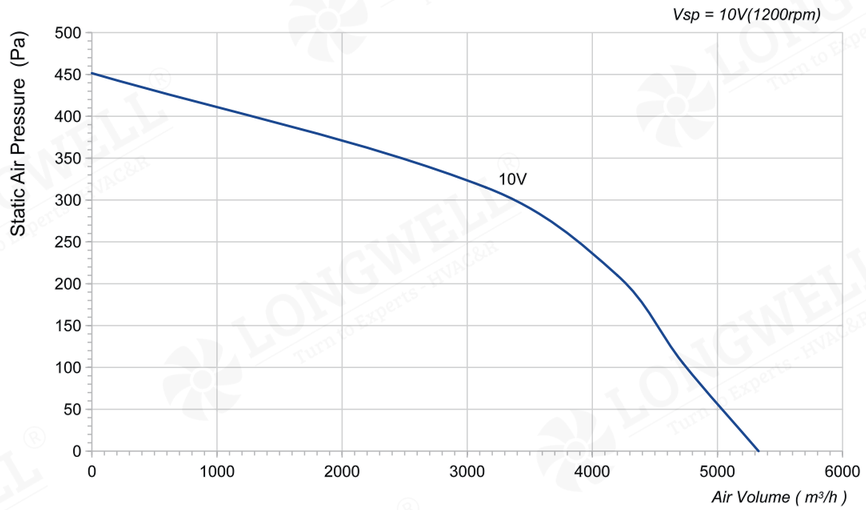

LWBE3G450-138NT-11 (without bracket)

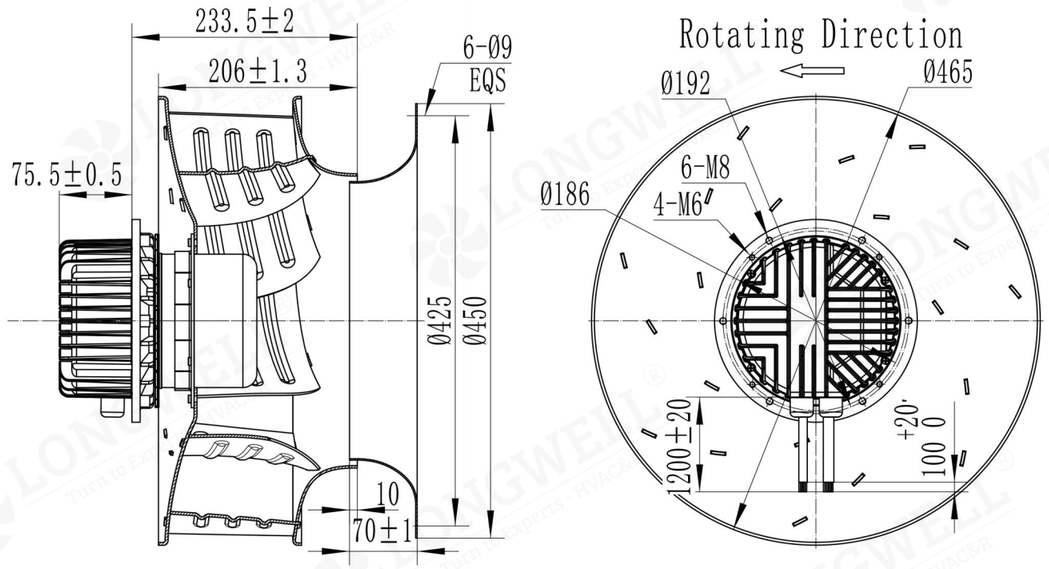

LWBE3G450-138PT-12 (with bracket)

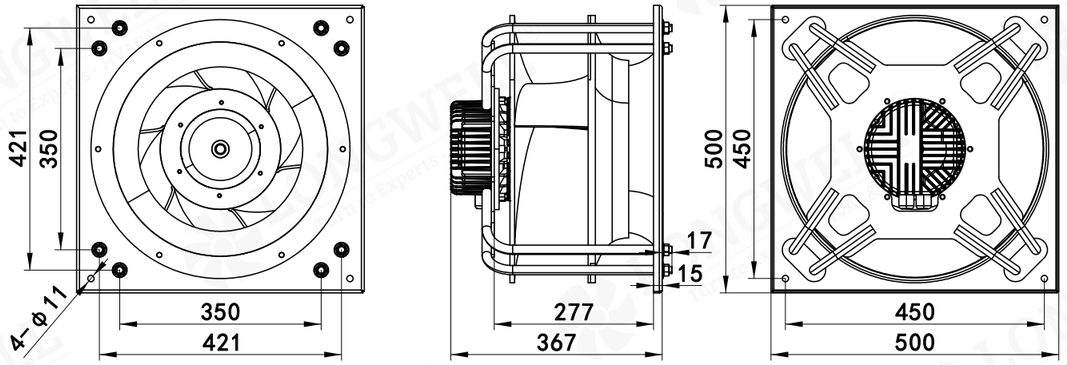

Ningbo Longwell Electric Technology Co., Ltd
https://www.longwellfans.com Email:sales@zjlongwell.com

LWBE-450 Serise




Product Characteristic


- Impeller Material: Aluminum Alloy
- Supply Voltage: 400V,50/60Hz
- Mode of Operation: S1
- Protection Class: IP54
- Insulation Class: F
- Operation Temperature: -25℃～+60℃
- Technical Feature: Control input 0-10VDC/PWM,Tach output,Locked-Rotor protection,Reverse Polarity Over-voltage protection,Soft Start Protection.


Technical Specifications

Model	Voltage (V)	Input Power (W)	Current (A)	Air Volume (m^3/h)	Static Pressure (Pa)	Speed (RPM)	Noise [dB(A)]
LWBE3G450-138PT-13	400	900	/	7182	730	1610	/

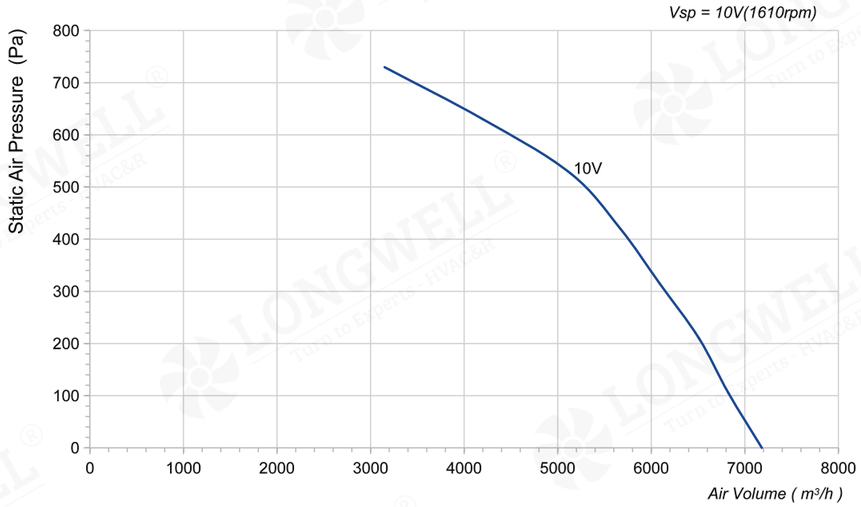


LWBE3G450-138NT-12 (without bracket)

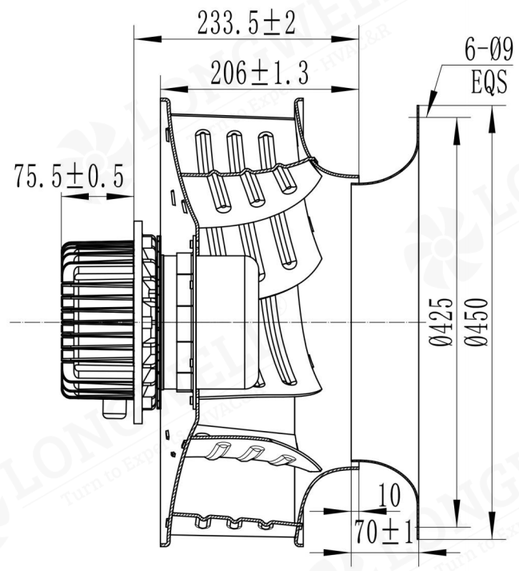

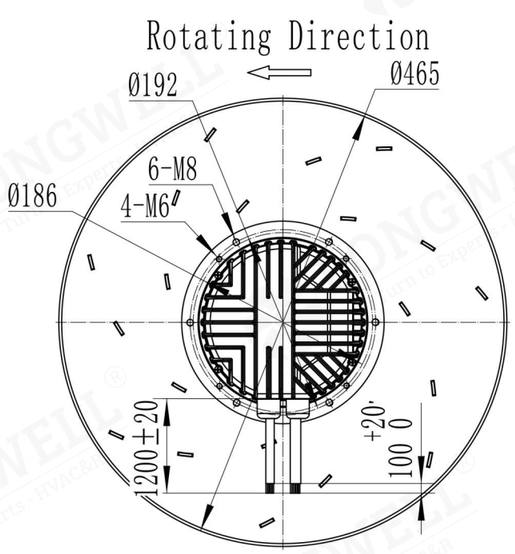

LWBE3G450-138PT-13 (with bracket)

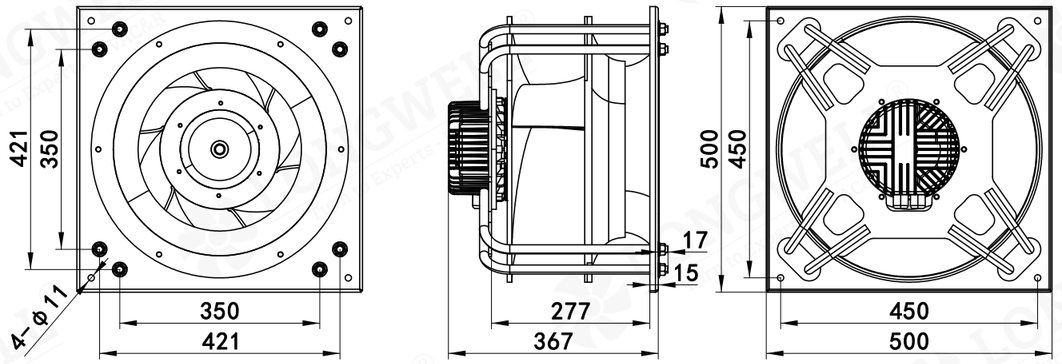

Ningbo Longwell Electric Technology Co., Ltd
https://www.longwellfans.com Email:sales@zjlongwell.com

LWBE-450 Serise




Product Characteristic


- Impeller Material: Aluminum Alloy
- Supply Voltage: 400V,50/60Hz
- Mode of Operation: S1
- Protection Class: IP54
- Insulation Class: F
- Operation Temperature: -25℃～+60℃
- Technical Feature: Control input 0-10VDC/PWM,Tach output,Locked-Rotor protection,Reverse Polarity Over-voltage protection,Soft Start Protection.

Technical Specifications


Model	Voltage (V)	Input Power (W)	Current (A)	Air Volume (m^3/h)	Static Pressure (Pa)	Speed (RPM)	Noise [dB(A)]
LWBE3G450-138PT-04	400	910	3.4	7828	824	1720	/

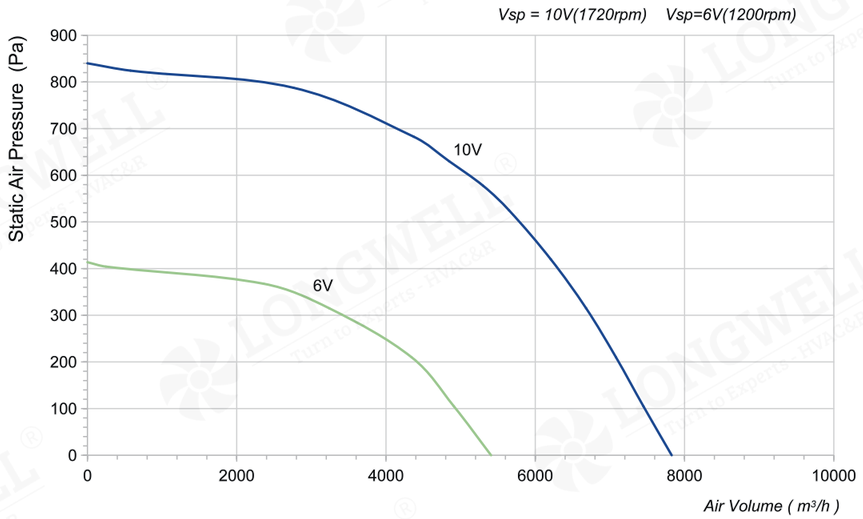

LWBE3G450-138NT-08 (without bracket)

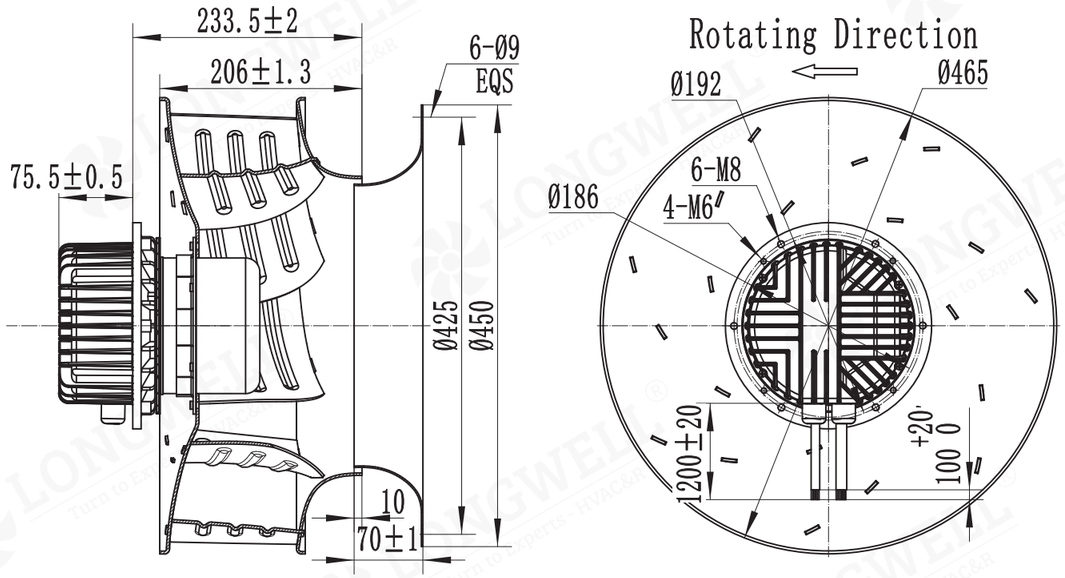

LWBE3G450-138PT-04 (with bracket)

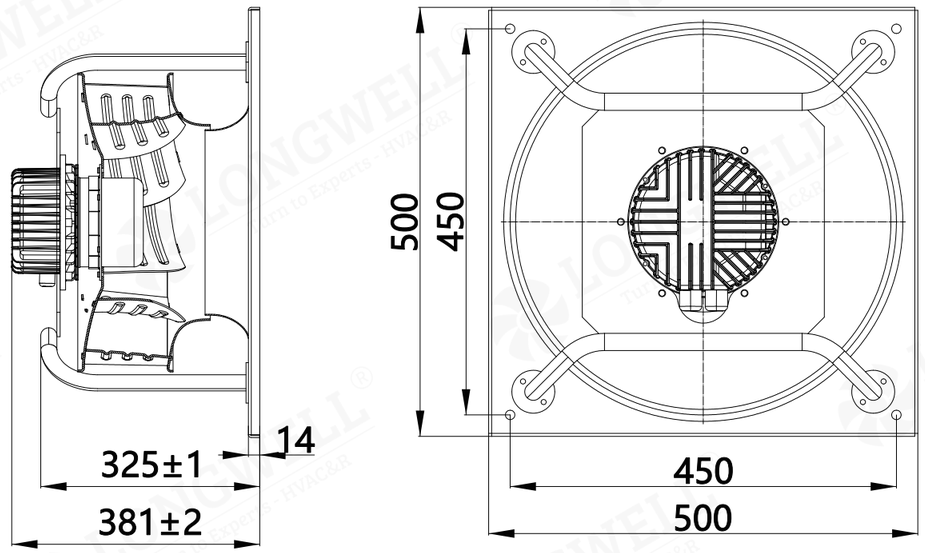

Ningbo Longwell Electric Technology Co., Ltd
https://www.longwellfans.com Email:sales@zjlongwell.com

LWBE-450 Serise




Product Characteristic


- Impeller Material: Aluminum Alloy
- Supply Voltage: 400V,50/60Hz
- Mode of Operation: S1
- Protection Class: IP54
- Insulation Class: F
- Operation Temperature: -25℃～+60℃
- Technical Feature: Control input 0-10VDC/PWM,Tach output,Locked-Rotor protection,Reverse Polarity Over-voltage protection,Soft Start Protection.

Technical Specifications


Model	Voltage (V)	Input Power (W)	Current (A)	Air Volume (m^3/h)	Static Pressure (Pa)	Speed (RPM)	Noise [dB(A)]
LWBE3G450-188PT-07	400	1590	3.45	7425	1568	2400	/

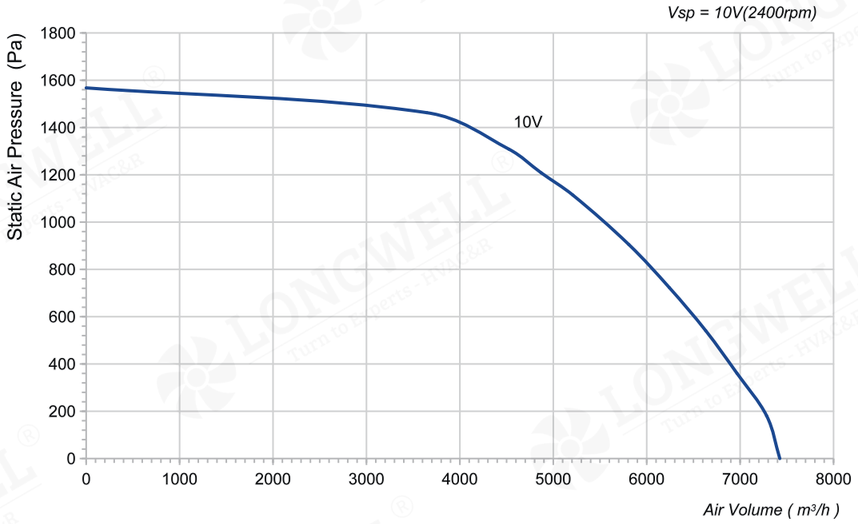

LWBE3G450-188NT-15 (without bracket)

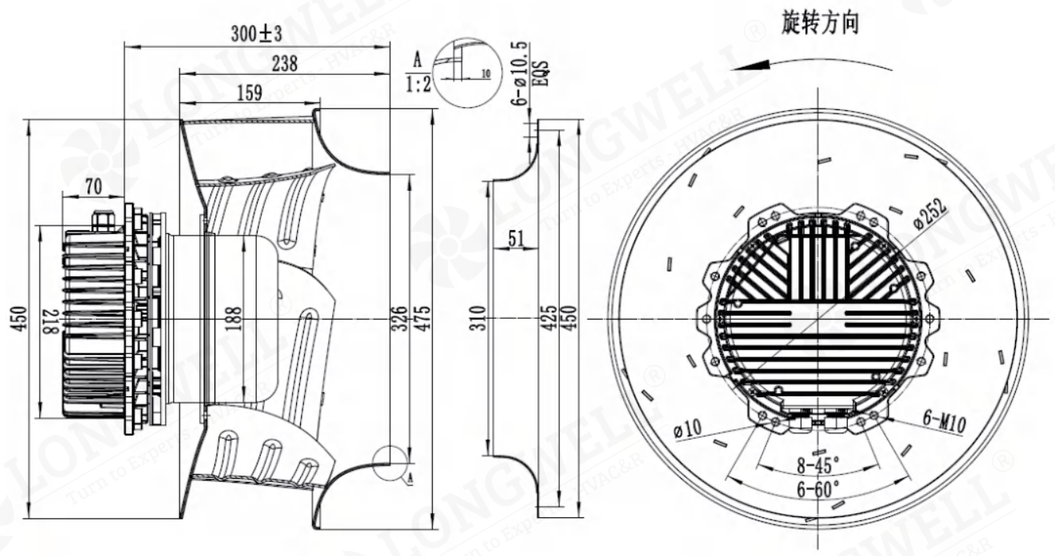

LWBE3G450-188PT-07 (with bracket)

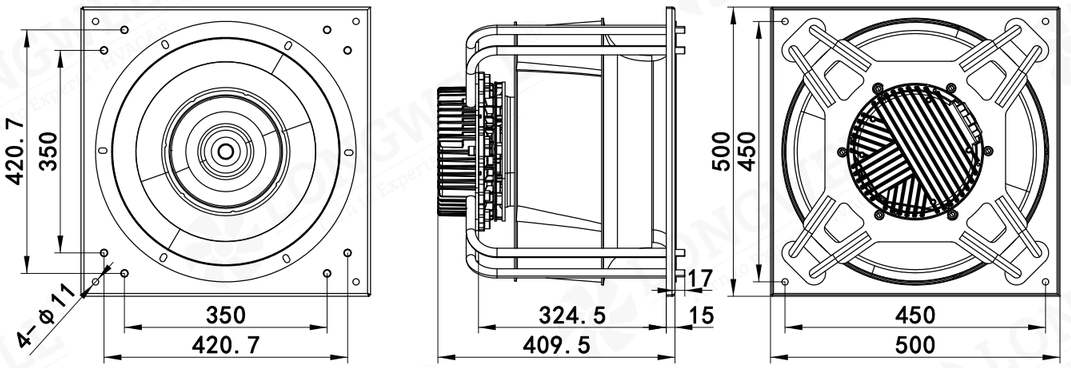

Ningbo Longwell Electric Technology Co., Ltd
https://www.longwellfans.com Email:sales@zjlongwell.com

LWBE-450 Serise




Product Characteristic


- Impeller Material: Aluminum Alloy
- Supply Voltage: 400V,50/60Hz
- Mode of Operation: S1
- Protection Class: IP54
- Insulation Class: F
- Operation Temperature: -25℃～+60℃
- Technical Feature: Control input 0-10VDC/PWM,Tach output,Locked-Rotor protection,Reverse Polarity Over-voltage protection,Soft Start Protection.

Technical Specifications


Model	Voltage (V)	Input Power (W)	Current (A)	Air Volume (m^3/h)	Static Pressure (Pa)	Speed (RPM)	Noise [dB(A)]
LWBE3G450-188PT-08	400	2060	4.2	8019	1802	2600	/

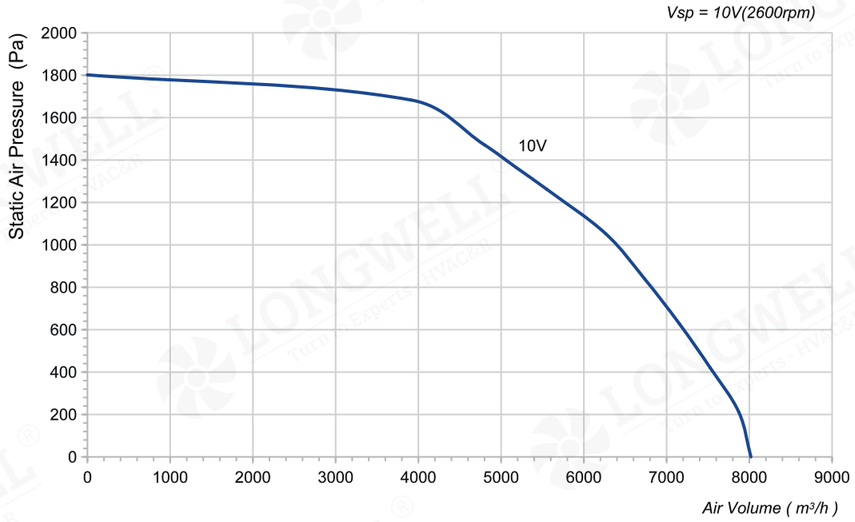

LWBE3G450-188NT-16 (without bracket)

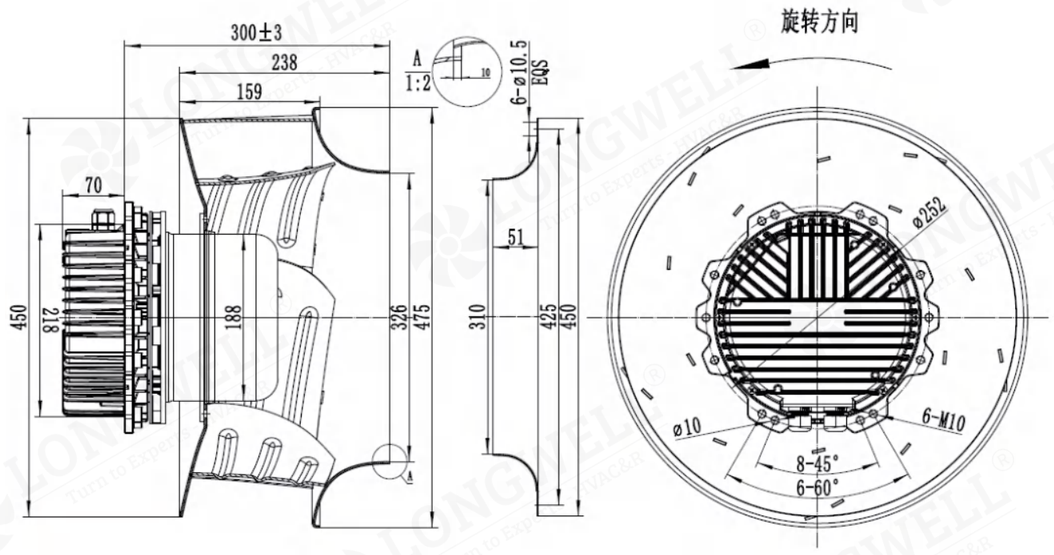

LWBE3G450-188PT-08 (with bracket)

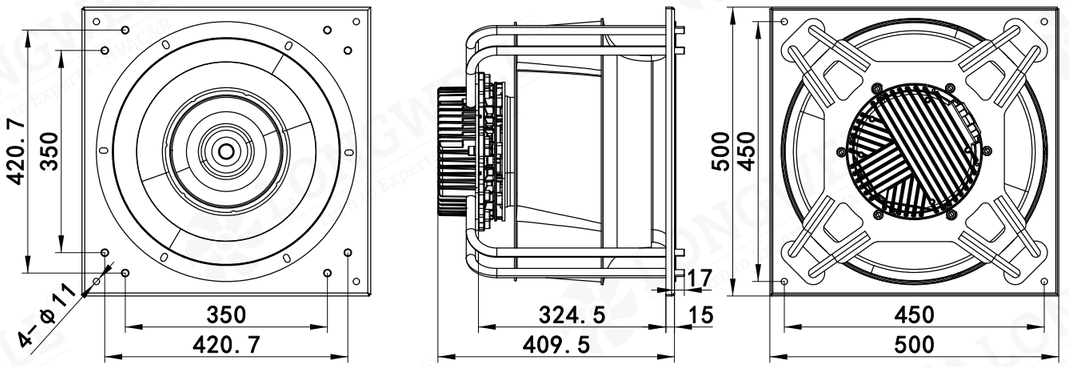

Ningbo Longwell Electric Technology Co., Ltd
https://www.longwellfans.com Email:sales@zjlongwell.com

LWBE-450 Serise




Product Characteristic


- Impeller Material: Aluminum Alloy
- Supply Voltage: 400V,50/60Hz
- Mode of Operation: S1
- Protection Class: IP54
- Insulation Class: F
- Operation Temperature: -25℃～+60℃
- Technical Feature: Control input 0-10VDC/PWM,Tach output,Locked-Rotor protection,Reverse Polarity Over-voltage protection,Soft Start Protection.

Technical Specifications


Model	Voltage (V)	Input Power (W)	Current (A)	Air Volume (m^3/h)	Static Pressure (Pa)	Speed (RPM)	Noise [dB(A)]
LWBE3G450-188PT-16	400	2400	5.2	8985	840	2600	/

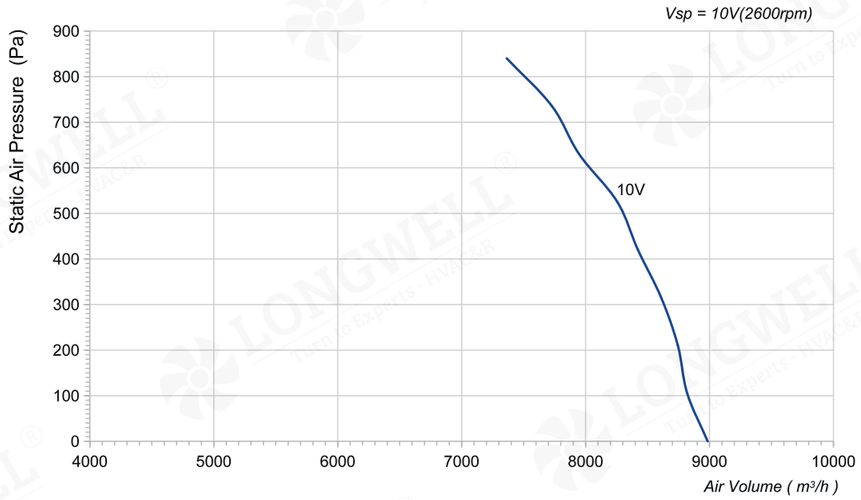

LWBE3G450-188NT-14 (without bracket)

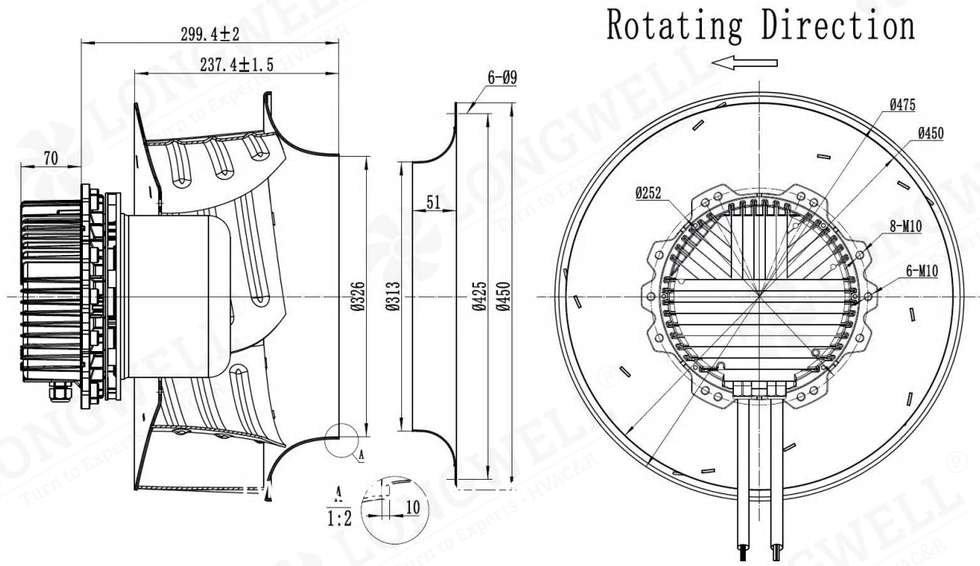

LWBE3G450-188PT-16 (with bracket)

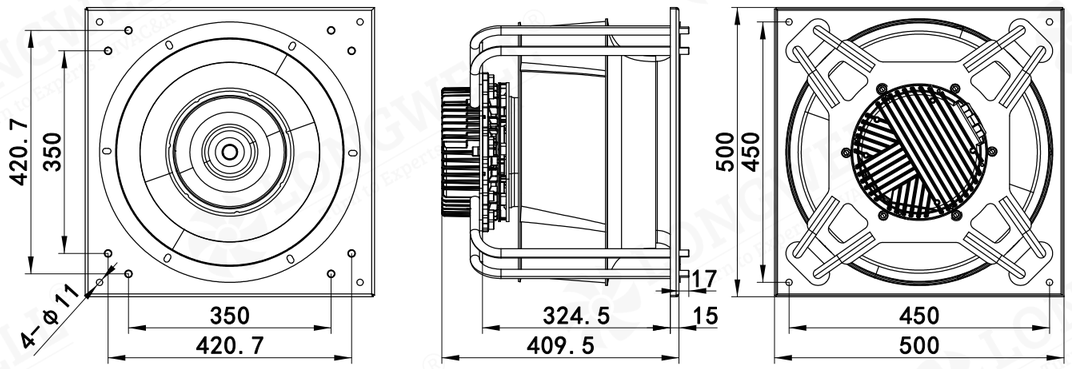

Ningbo Longwell Electric Technology Co., Ltd
https://www.longwellfans.com Email:sales@zjlongwell.com

LWBE-450 Serise




Product Characteristic


- Impeller Material: Aluminum Alloy
- Supply Voltage: 400V,50/60Hz
- Mode of Operation: S1
- Protection Class: IP54
- Insulation Class: F
- Operation Temperature: -25℃～+60℃
- Technical Feature: Control input 0-10VDC/PWM,Tach output,Locked-Rotor protection,Reverse Polarity Over-voltage protection,Soft Start Protection.

Technical Specifications

Model	Voltage (V)	Input Power (W)	Current (A)	Air Volume (m^3/h)	Static Pressure (Pa)	Speed (RPM)	Noise [dB(A)]
LWBE3G450-188PT-09	400	2595	5.3	8661	2114	2800	/

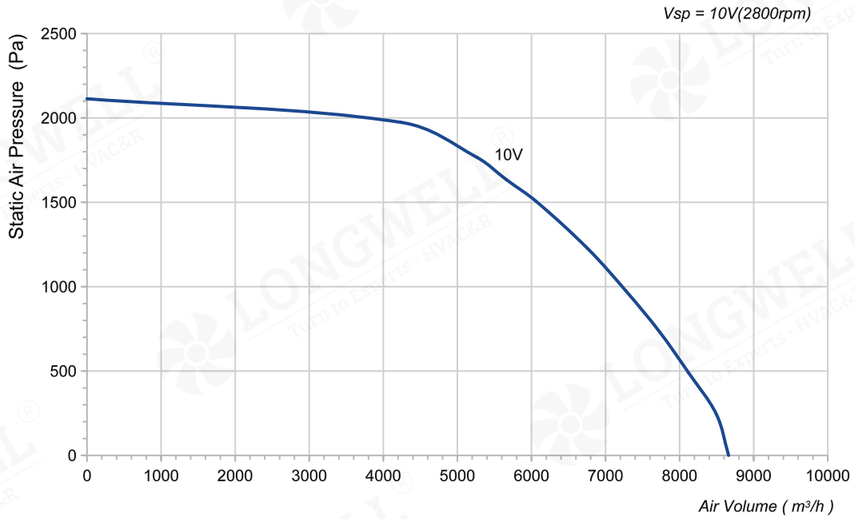

LWBE3G450-188NT-17 (without bracket)

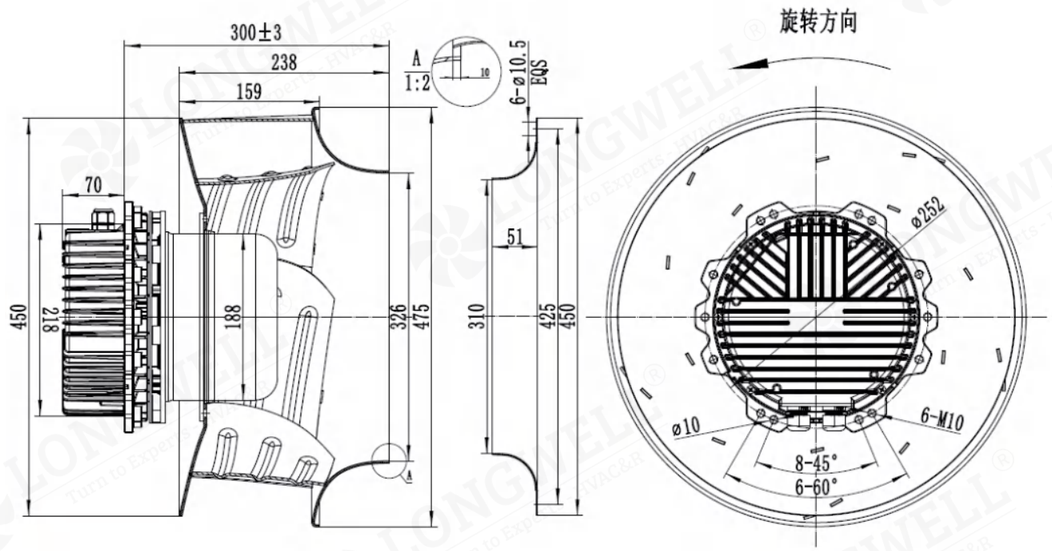

LWBE3G450-188PT-09 (with bracket)

