
LWAE-500 Serise



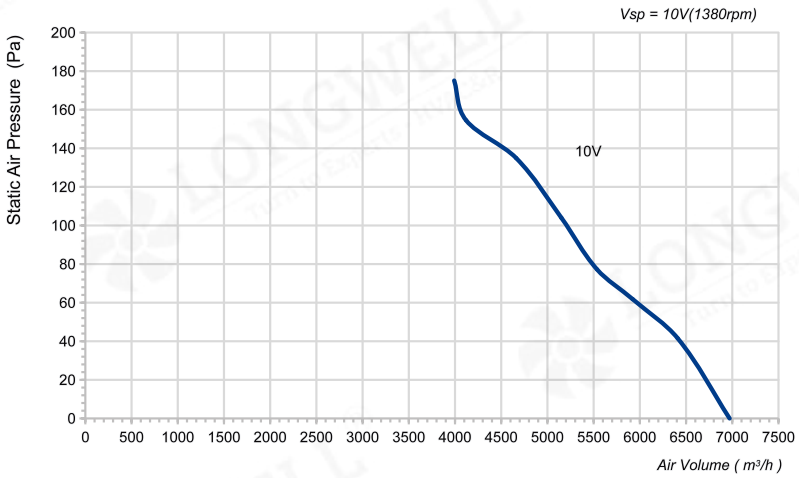



Product Characteristic

- Material : Sheet steel
- Type of Protection: IP54
- Insulation Class: F
- Motor Type: BLEC Motor
- Operation Temperature: -25℃～+60℃
- Technical Features: Control input 0-10VDC/PWM
- Protection: Tach output,Locked-Rotor protection,Reverse Polarity,Over-voltage Protection,Soft Start Protection

Technical Specifications

Model	Voltage (V)	Frequency (Hz)	Current (A)	Power [W(@0Pa)]	Speed (RPM)	Air Volume (m³/h)	Noise [dB(A)]
LWAE3G500SS-5MEW-11	230	50/60	1.5	343	1380	6971	67

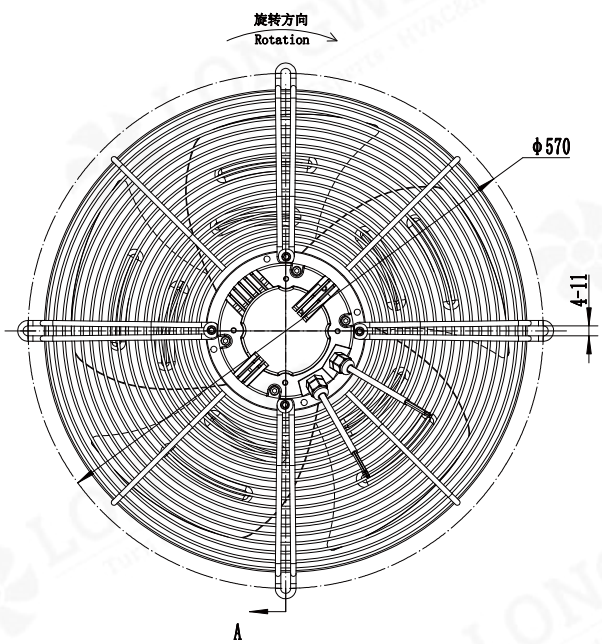

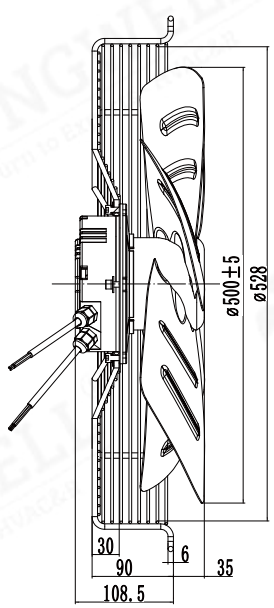

Ningbo Longwell Electric Technology Co., Ltd
https://www.longwellfans.com Email:sales@zjlongwell.com

LWAE-500 Serise




Product Characteristic


- Material : Sheet steel
- Type of Protection: IP54
- Insulation Class: F
- Motor Type: BLEC Motor
- Operation Temperature: -25℃～+60℃
- Technical Feature: Control input 0-10VDC/PWM,Tach output,Locked-Rotor protection,Reverse Polarity, Over-voltage Protection,Soft Start Protection

Technical Specifications


Model	Voltage (V)	Frequency (Hz)	Current (A)	Power [W(@0Pa)]	Speed (RPM)	Air Volume (m^3/h)	Noise [dB(A)]
LWAE3G500TS-5MNW-01	3-380	50/60	1.5	850	1690	10506	78
LWAE3G500TT-5MNW-02	3-380	50/60	1.5	850	1690	10506	78
LWAE3G500TS-5MEW-03	3-380	50/60	1.5	850	1690	10506	78
LWAE3G500TT-5MEW-04	3-380	50/60	1.5	850	1690	10506	78
LWAE3G500TS-5MKW-05	3-380	50/60	1.5	850	1690	10506	78
LWAE3G500TT-5MKW-06	3-380	50/60	1.5	850	1690	10506	78

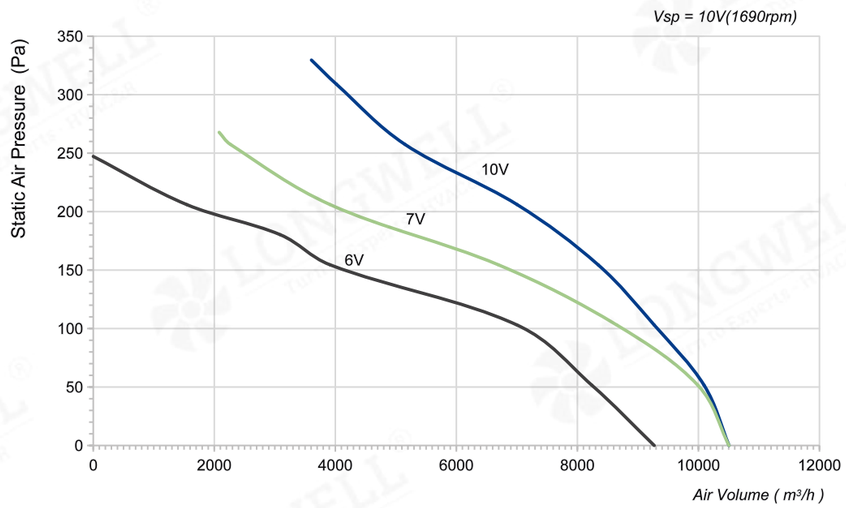


LWAE3G500TS-5MNW-01(Suction) LWAE3G500TT-5MNW-02(Blowing)

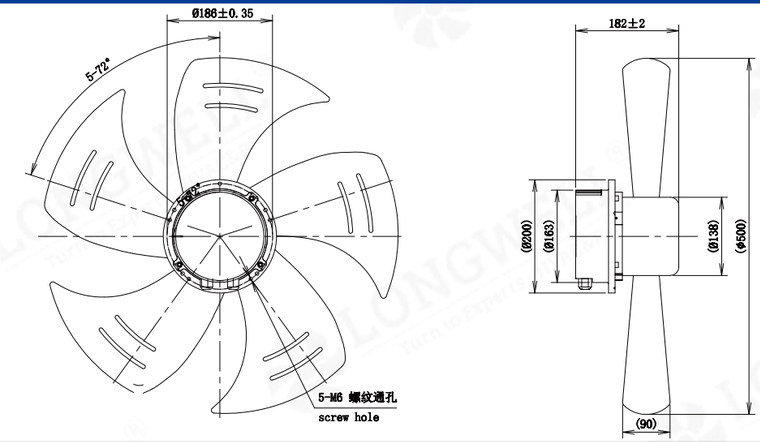


LWAE3G500TS-5MEW-03(Suction) LWAE3G500TT-5MEW-04(Blowing)

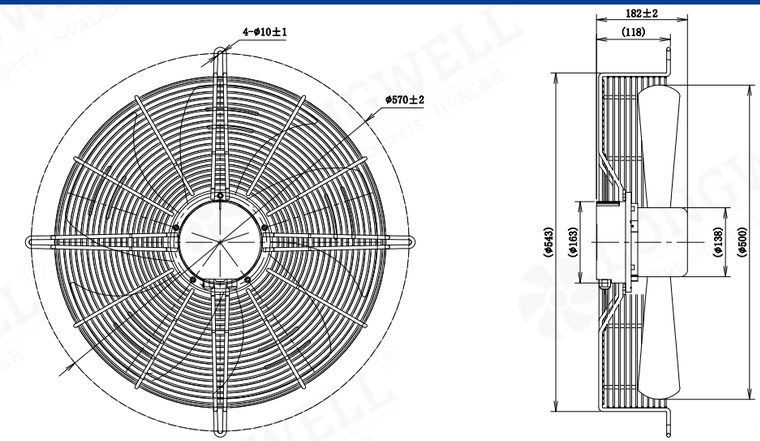

LWAE3G500TS-5MKW-05(Suction) LWAE3G500TT-5MKW-06(Blowing)

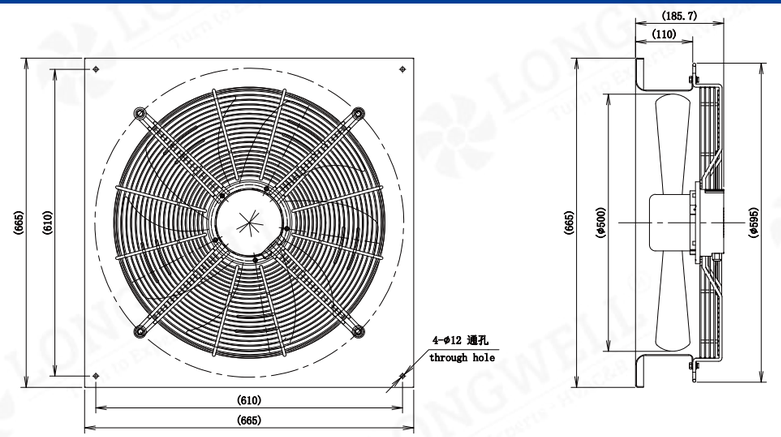

LWAE-500 Serise

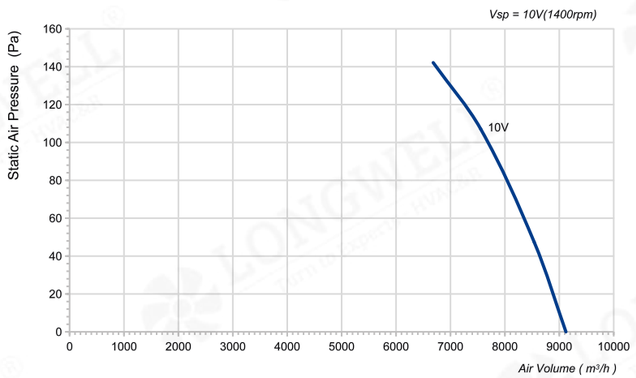




Product Characteristic

- Material : PA66
- Type of Protection: IP54
- Insulation Class: F
- Motor Type: BLEC Motor
- Operation Temperature: -25℃～+60℃
- Technical Features: Control input 0-10VDC/PWM/RS485
- Protection: Tach output,Locked-Rotor protection,Reverse Polarity,Over-voltage Protection,Soft Start Protection


CE RoHS BSCI ISO EAC UL LVD

Technical Specifications

Model	Voltage (V)	Frequency (Hz)	Current (A)	Power [W(@0Pa)]	Speed (RPM)	Air Volume (m³/h)	Noise [dB(A)]
LWAE3G500SS-5PKW-12	230	50/60	2.25	586	1400	9122	70

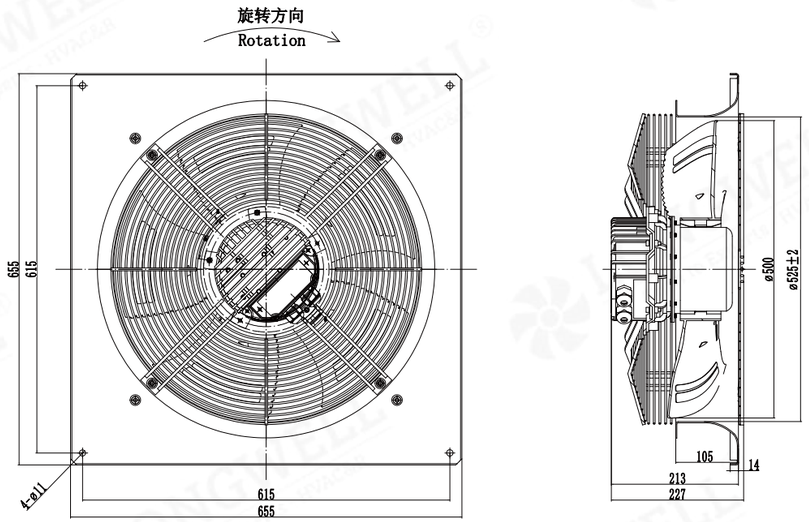

LWAE-500 Serise

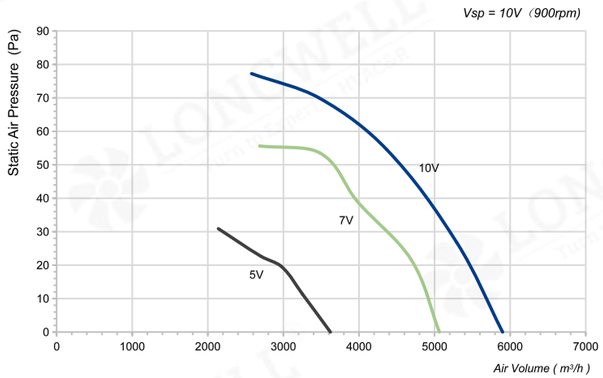




Product Characteristic


- Material : PA66
- Type of Protection: IP54
- Insulation Class: B
- Motor Type: BLEC Motor
- Operation Temperature: -20℃～+60℃
- Technical Features: Control input 0-10VDC/PWM/RS485
- Protection: Tach output,Locked-Rotor protection,Reverse Polarity,Over-voltage Protection,Soft Start Protection

CE RoHS BSCI ISO EAC UL LVD

Technical Specifications

Model	Voltage (V)	Frequency (Hz)	Current (A)	Power [W(@0Pa)]	Speed (RPM)	Air Volume (m³/h)	Noise [dB(A)]
LWAE3G500SS-5PKW-15	230	50/60	1.4	200	900	5900	56

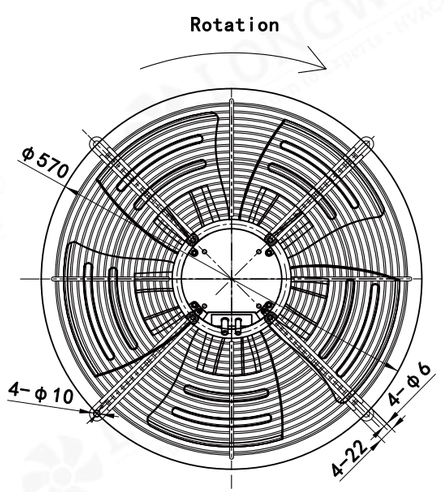

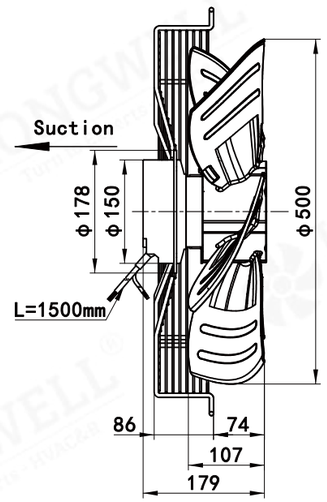

Ningbo Longwell Electric Technology Co., Ltd
https://www.longwellfans.com Email:sales@zjlongwell.com