
LWBE-560 Serise



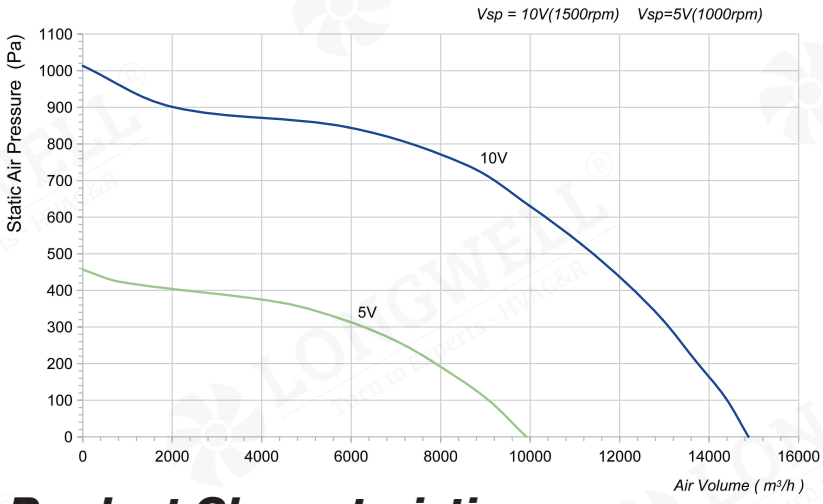

Product Characteristic


Impeller Material:	Aluminum Alloy	Supply Voltage:	400V,50/60Hz
Direction of Rotation:	Clockwise,seen on rotor	Mode of Operation:	S1
Protection Class:	IP54	Insulation Class:	F
Mounting Position:	Horizontal or Vertical	Operation Temperature:	-25℃～+60℃
Bearing:	Maintenance-free ball bearings	Technical Features:	Control input 0-10VDC/PWM


- Protection: Tach output,Locked-Rotor protection Reverse Polarity,Over-voltage protection,Soft Start

CE RoHS compliant Intertek BSCI ISO EAC UL LVD


Technical Specifications

Model	Voltage (V)	Input Power (W)	Current (A)	Air Volume (m³/h)	Static Pressure (Pa)	Speed (RPM)	Noise [dB(A)]
LWBE3G560-188NT-10	400	2420	5.3	14879	1013	1500	/

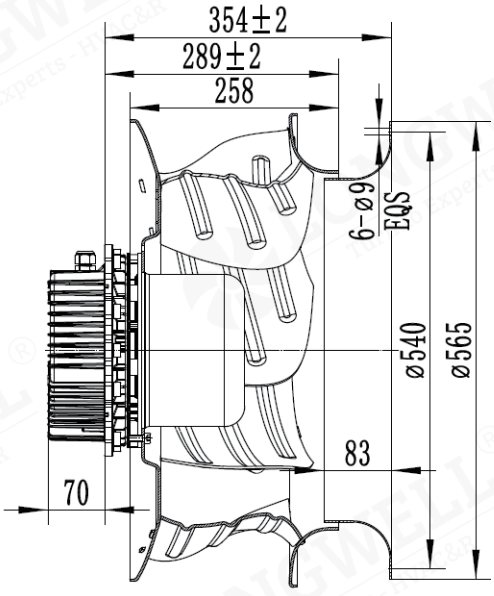

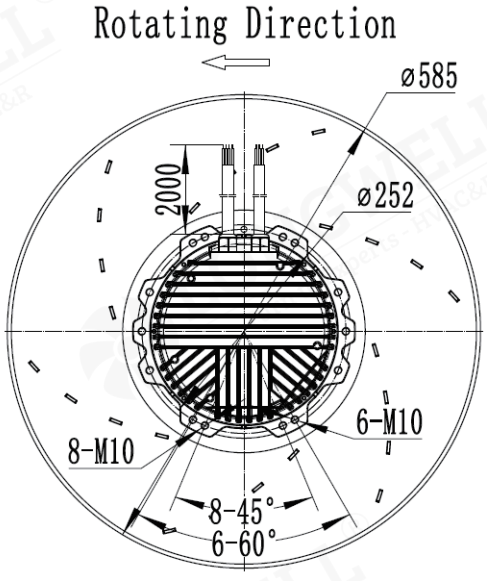

LWBE-560 Serise

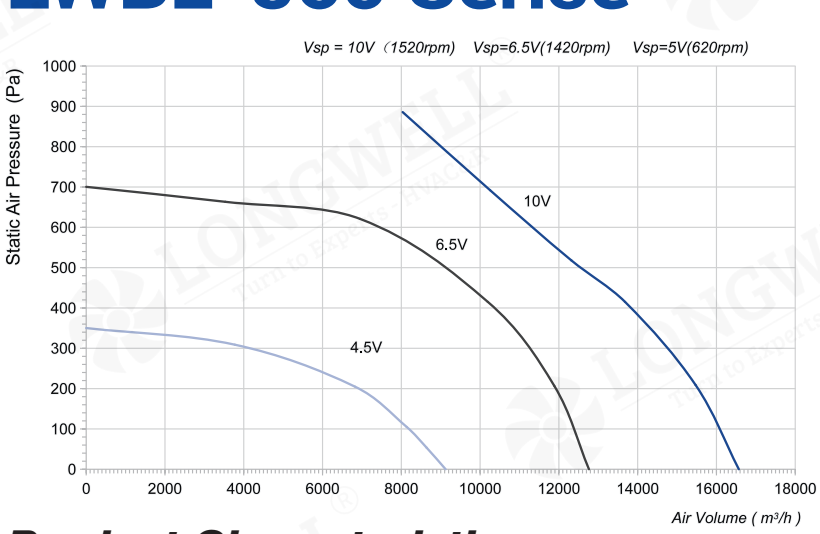




Product Characteristic

• Impeller Material:	Aluminum Alloy	• Supply Voltage:	400V,50/60Hz
• Direction of Rotation:	Clockwise,seen on rotor	• Mode of Operation:	S1
• Protection Class:	IP54	• Insulation Class:	F
• Mounting Position:	Horizontal or Vertical	• Operation Temperature:	-25℃～+60℃
• Bearing:	Maintenance-free ball bearings	• Technical Features:	Control input 0-10VDC/PWM


• Protection: Tach output,Locked-Rotor protection Reverse Polarity,Over-voltage protection,Soft Start

Technical Specifications

Model	Voltage (V)	Input Power (W)	Current (A)	Air Volume (m³/h)	Static Pressure (Pa)	Speed (RPM)	Noise [dB(A)]
LWBE3G560-188NT-09	400	2770	4.4	16480	886	1520	81

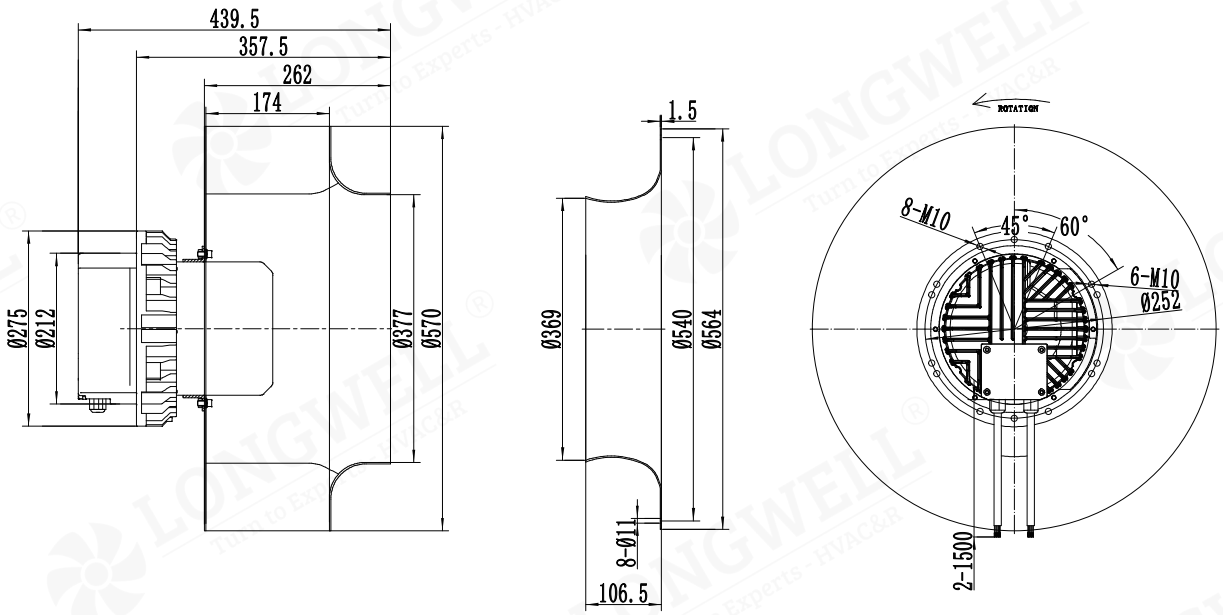

LWBE-560 Serise

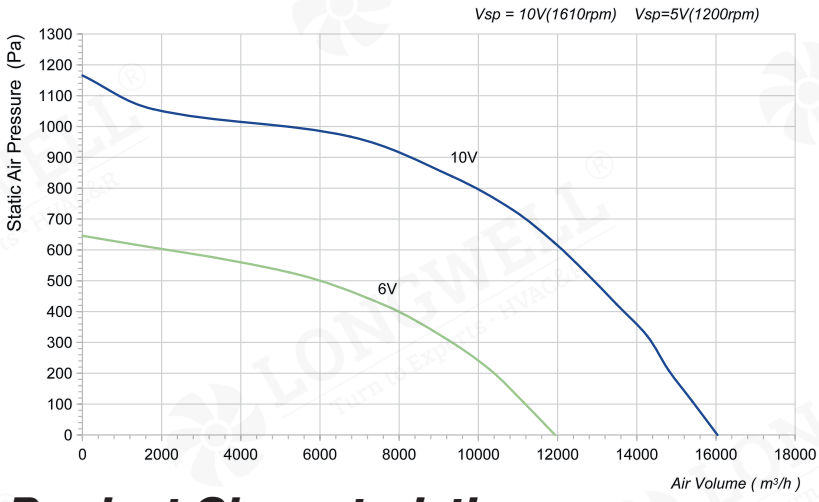





Product Characteristic

- Impeller Material: Aluminum Alloy
- Supply Voltage: 400V,50/60Hz
- Direction of Rotation: Clockwise,seen on rotor
- Mode of Operation: S1
- Protection Class: IP54
- Insulation Class: F
- Mounting Position: Horizontal or Vertical
- Operation Temperature: -25℃～+60℃
- Bearing: Maintenance-free ball bearings
- Technical Features: Control input 0-10VDC/PWM
- Protection: Tach output,Locked-Rotor protection Reverse Polarity,Over-voltage protection,Soft Start


Technical Specifications

Model	Voltage (V)	Input Power (W)	Current (A)	Air Volume (m³/h)	Static Pressure (Pa)	Speed (RPM)	Noise [dB(A)]
LWBE3G560-188NT-01	400	3300	8	16039	1166	1610	/

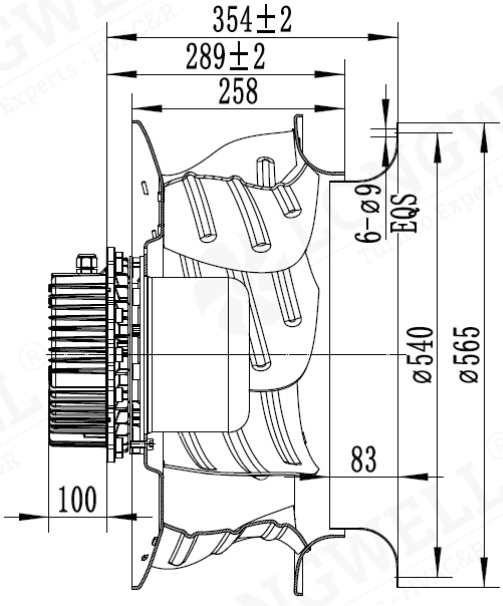

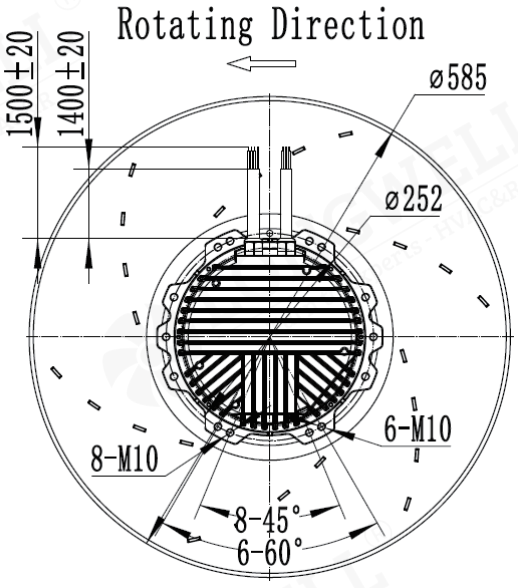

LWBE-560 Serise

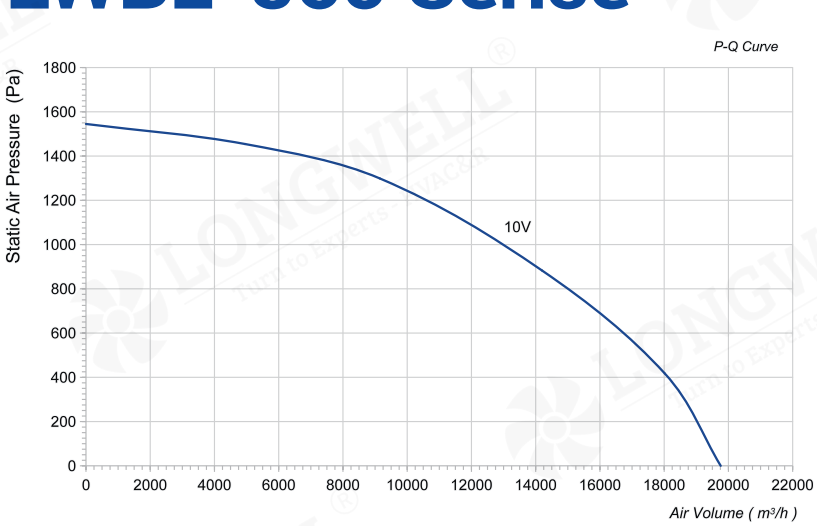





Product Characteristic


- Impeller Material: Aluminum Alloy
- Supply Voltage: 380V,50/60Hz
- Direction of Rotation: Clockwise,seen on rotor
- Mode of Operation: S1
- Protection Class: IP54
- Insulation Class: F
- Mounting Position: Horizontal or Vertical
- Operation Temperature: -25℃～+60℃
- Bearing: Maintenance-free ball bearings
- Technical Features: Control input 0-10VDC/PWM
- Protection: Tach output,Locked-Rotor protection Reverse Polarity,Over-voltage protection,Soft Start

Technical Specifications


Model	Voltage (V)	Input Power (W)	Current (A)	Air Volume (m³/h)	Static Pressure (Pa)	Speed (RPM)	Noise [dB(A)]
LWBE3G560-188NT-14	380	4700	7.9	19760	1545	1850	91

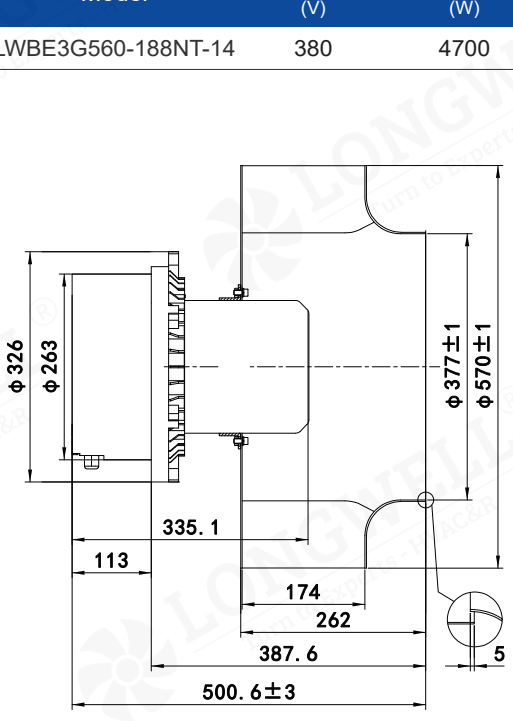

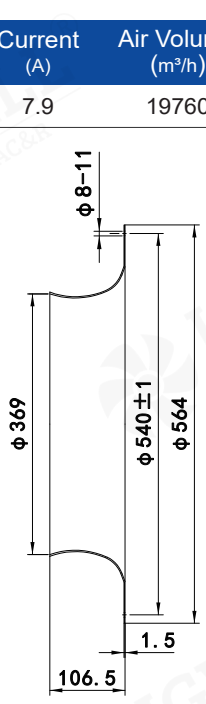

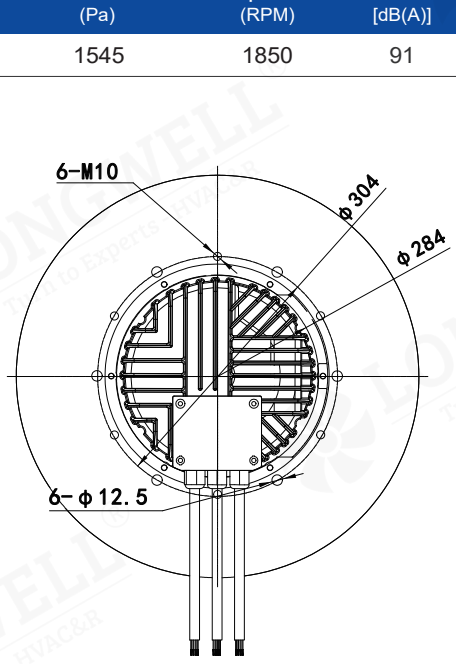

LWBE-560 Serise

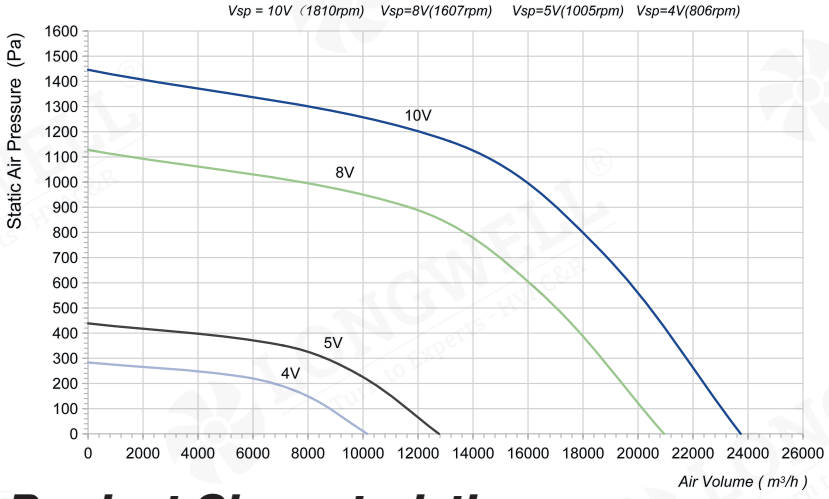



Product Characteristic

Impeller Material:	Aluminum Alloy	Supply Voltage:	400V,50/60Hz
Direction of Rotation:	Clockwise,seen on rotor	Mode of Operation:	S1
Protection Class:	IP54	Insulation Class:	F
Mounting Position:	Horizontal or Vertical	Operation Temperature:	-25℃～+60℃
Bearing:	Maintenance-free ball bearings	Technical Features:	Control input 0-10VDC/PWM

- Protection: Tach output,Locked-Rotor protection Reverse Polarity,Over-voltage protection,Soft Start

Technical Specifications

Model	Voltage (V)	Input Power (W)	Current (A)	Air Volume (m³/h)	Static Pressure (Pa)	Speed (RPM)	Noise [dB(A)]
LWBE3G560-218NT-13	400	5600	9.5	23896	1442	1800	/

