Ningbo Longwell Electric Technology Co., Ltd
https://www.longwellfans.com Email:sales@zjlongwell.com

LWBE-560 Serise




Product Characteristic


- Impeller Material: Aluminum Alloy
- Supply Voltage: 400V,50/60Hz
- Mode of Operation: S1
- Protection Class: IP54
- Insulation Class: F
- Operation Temperature: -25℃～+60℃
- Technical Feature: Control input 0-10VDC/PWM,Tach output,Locked-Rotor protection,Reverse Polarity Over-voltage protection,Soft Start Protection.

Technical Specifications


Model	Voltage (V)	Input Power (W)	Current (A)	Air Volume (m³/h)	Static Pressure (Pa)	Speed (RPM)	Noise [dB(A)]
LWBE3G560-188PT-02	400	2770	4.4	16480	886	1520	81

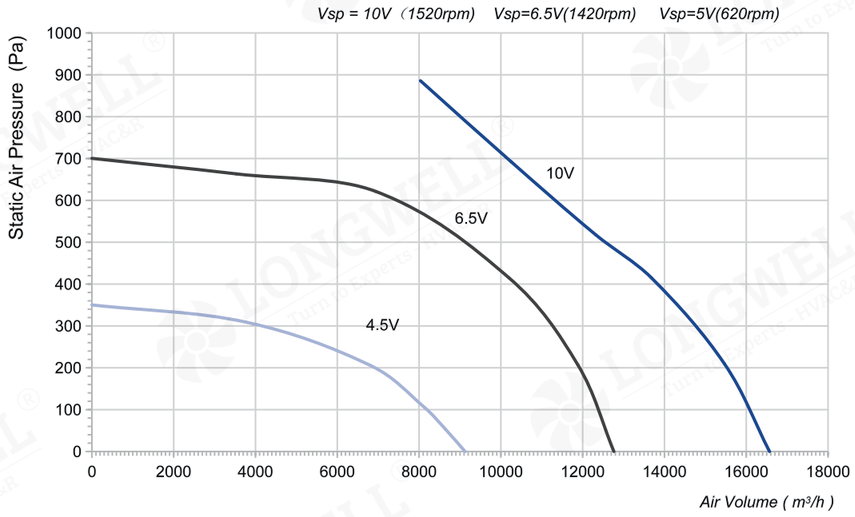

LWBE3G560-188NT-09 (without bracket)

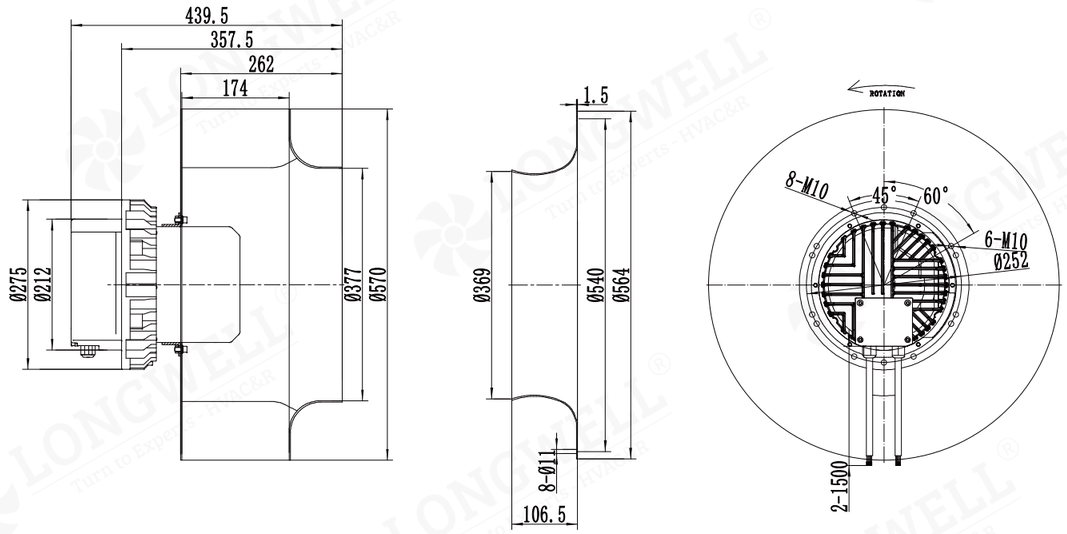

LWBE3G560-188PT-02 (with bracket)

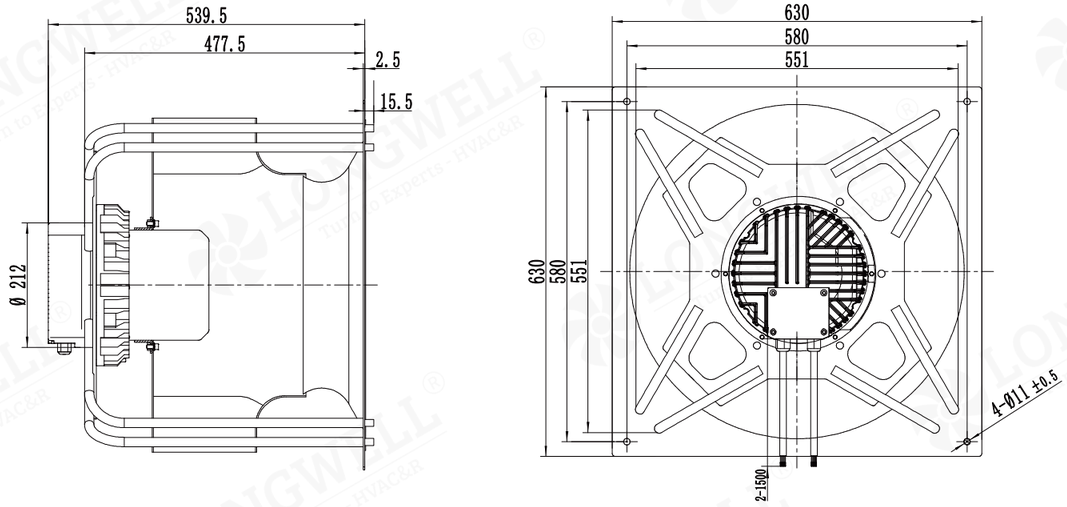

Ningbo Longwell Electric Technology Co., Ltd
https://www.longwellfans.com Email:sales@zjlongwell.com

LWBE-560 Serise




Product Characteristic


- Impeller Material: Aluminum Alloy
- Supply Voltage: 400V,50/60Hz
- Mode of Operation: S1
- Protection Class: IP54
- Insulation Class: F
- Operation Temperature: -25℃～+60℃
- Technical Feature: Control input 0-10VDC/PWM,Tach output,Locked-Rotor protection,Reverse Polarity Over-voltage protection,Soft Start Protection.


Technical Specifications

Model	Voltage (V)	Input Power (W)	Current (A)	Air Volume (m^3/h)	Static Pressure (Pa)	Speed (RPM)	Noise [dB(A)]
LWBE3G560-188PT-03	400	2420	5.3	14879	1013	1500	/

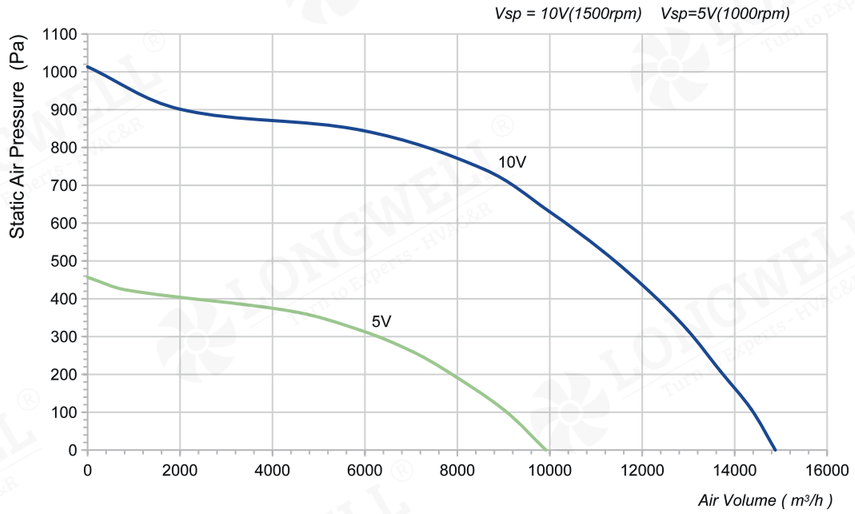



LWBE3G560-188NT-10 (without bracket)

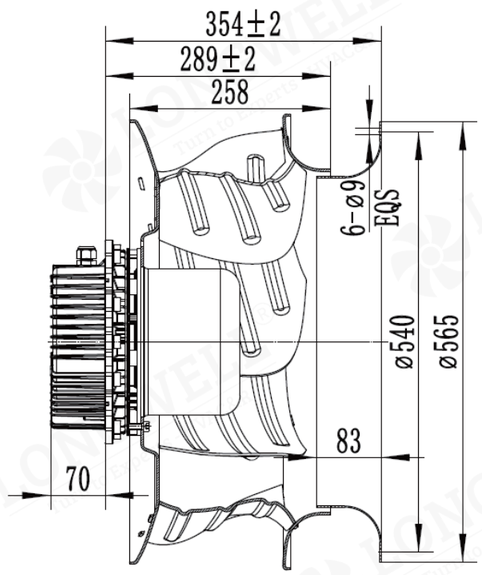


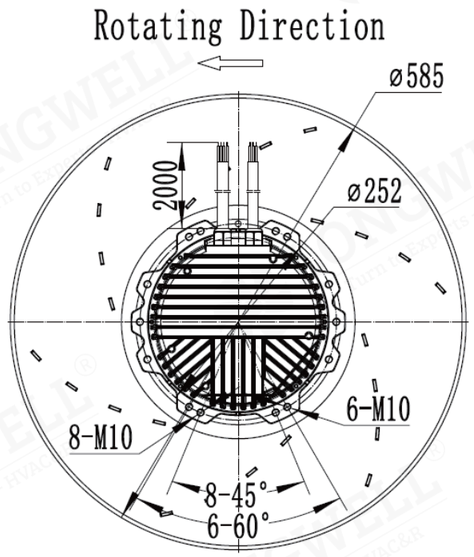

LWBE3G560-188PT-03 (with bracket)

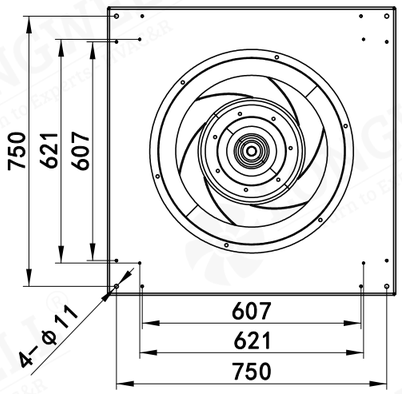

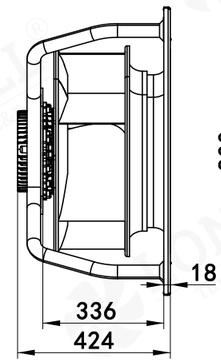

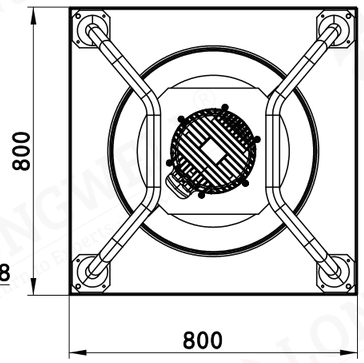

Ningbo Longwell Electric Technology Co., Ltd
https://www.longwellfans.com Email:sales@zjlongwell.com

LWBE-560 Serise




Product Characteristic


- Impeller Material: Aluminum Alloy
- Supply Voltage: 400V,50/60Hz
- Mode of Operation: S1
- Protection Class: IP54
- Insulation Class: F
- Operation Temperature: -25℃～+60℃
- Technical Feature: Control input 0-10VDC/PWM,Tach output,Locked-Rotor protection,Reverse Polarity Over-voltage protection,Soft Start Protection.


Technical Specifications

Model	Voltage (V)	Input Power (W)	Current (A)	Air Volume (m^3/h)	Static Pressure (Pa)	Speed (RPM)	Noise [dB(A)]
LWBE3G560-188PT-01	400	3300	8	16039	1166	1610	/

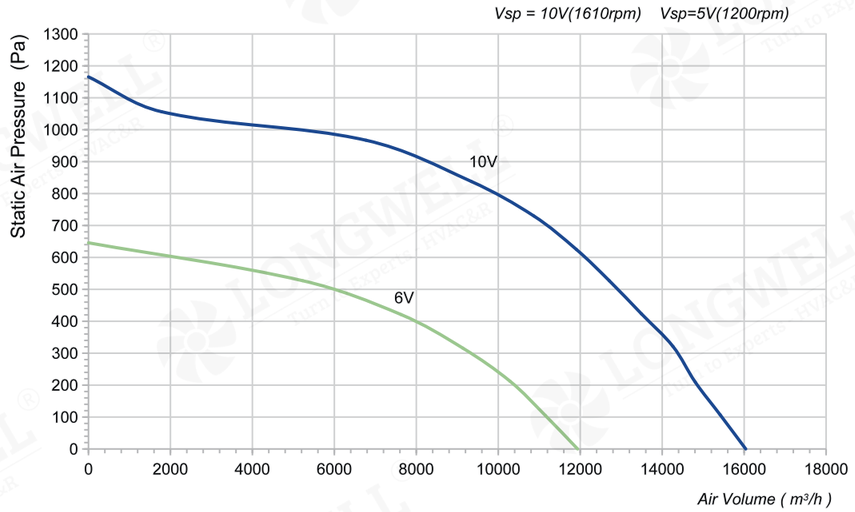



LWBE3G560-188NT-01 (without bracket)

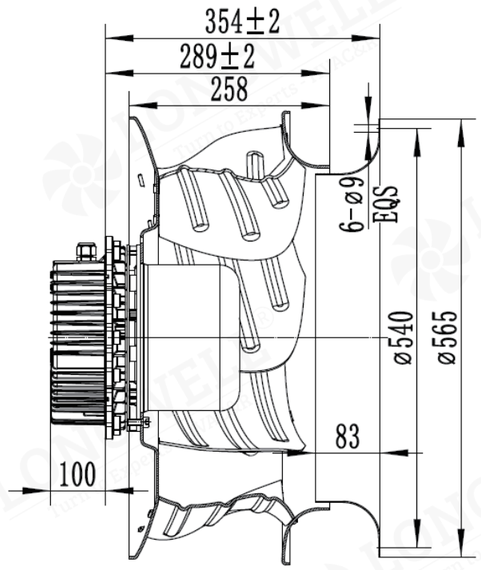

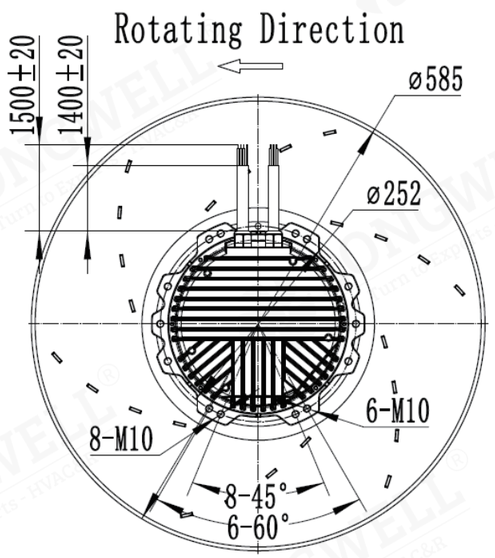

LWBE3G560-188PT-01 (with bracket)

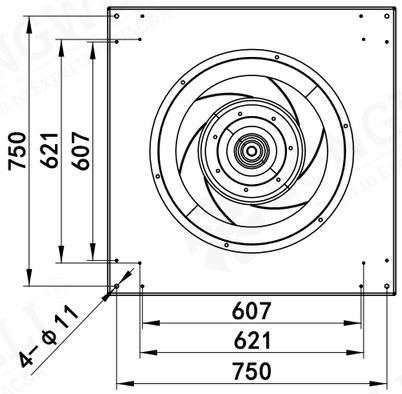

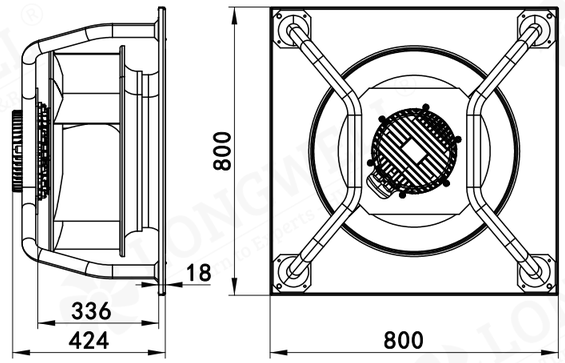

Ningbo Longwell Electric Technology Co., Ltd
https://www.longwellfans.com Email:sales@zjlongwell.com

LWBE-560 Serise




Product Characteristic


- Impeller Material: Aluminum Alloy
- Supply Voltage: 380V,50/60Hz
- Mode of Operation: S1
- Protection Class: IP54
- Insulation Class: F
- Operation Temperature: -25℃～+60℃
- Technical Feature: Control input 0-10VDC/PWM,Tach output,Locked-Rotor protection,Reverse Polarity Over-voltage protection,Soft Start Protection.

Technical Specifications


Model	Voltage (V)	Input Power (W)	Current (A)	Air Volume (m^3/h)	Static Pressure (Pa)	Speed (RPM)	Noise [dB(A)]
LWBE3G560-188PT-08	380	4700	7.9	19760	1545	1850	91

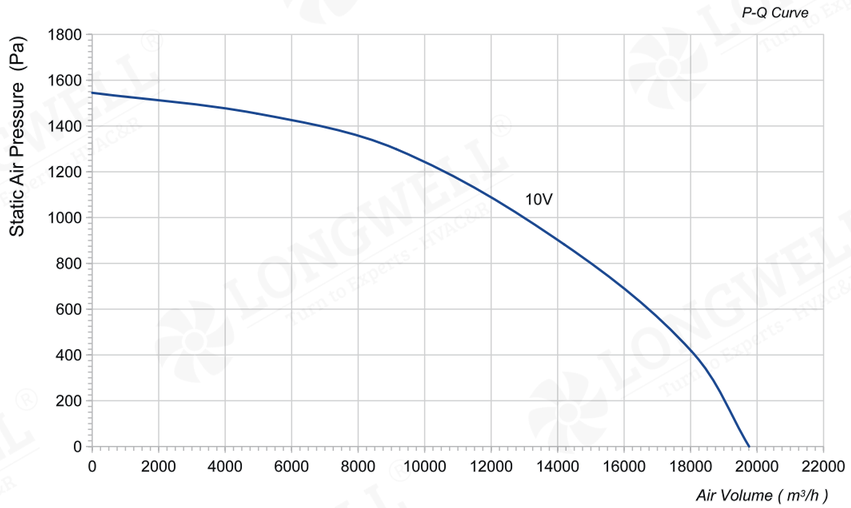

LWBE3G560-188NT-14 (without bracket)

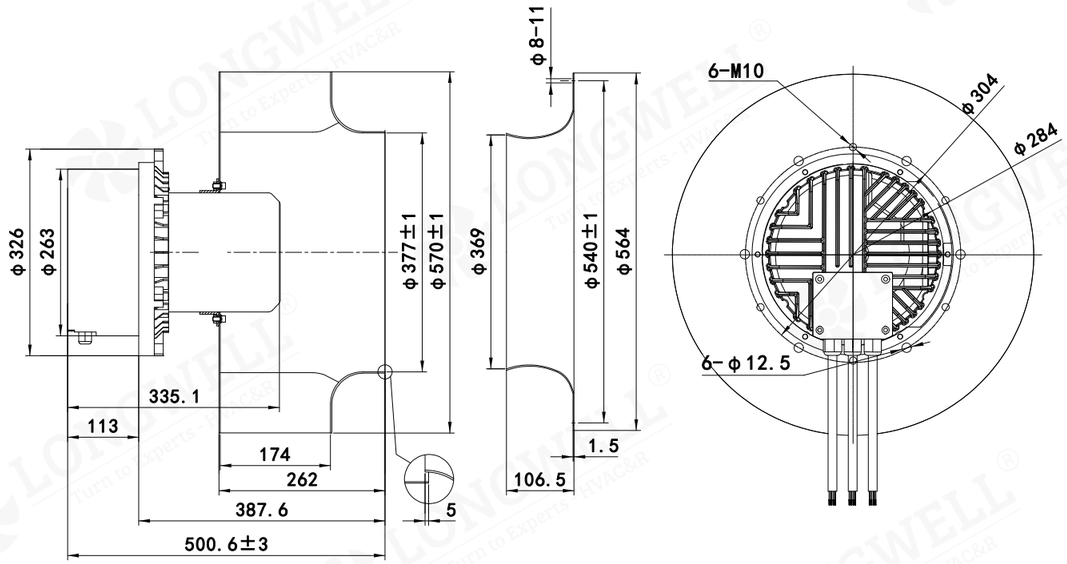

LWBE3G560-188PT-08 (with bracket)

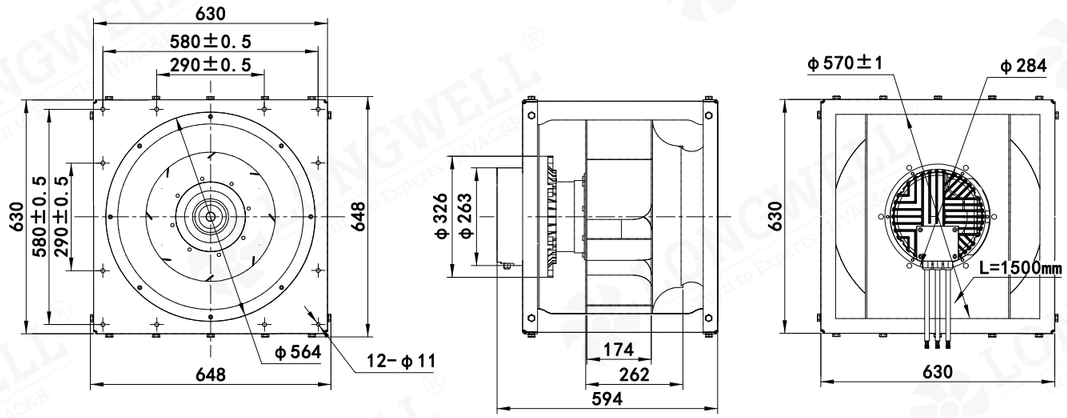

Ningbo Longwell Electric Technology Co., Ltd
https://www.longwellfans.com Email:sales@zjlongwell.com

LWBE-560 Serise




Product Characteristic


- Impeller Material: Aluminum Alloy
- Supply Voltage: 400V,50/60Hz
- Mode of Operation: S1
- Protection Class: IP54
- Insulation Class: F
- Operation Temperature: -25℃～+60℃
- Technical Feature: Control input 0-10VDC/PWM,Tach output,Locked-Rotor protection,Reverse Polarity Over-voltage protection,Soft Start Protection.


Technical Specifications

Model	Voltage (V)	Input Power (W)	Current (A)	Air Volume (m^3/h)	Static Pressure (Pa)	Speed (RPM)	Noise [dB(A)]
LWBE3G560-218PT-06	400	5600	9.5	23896	1442	1800	/

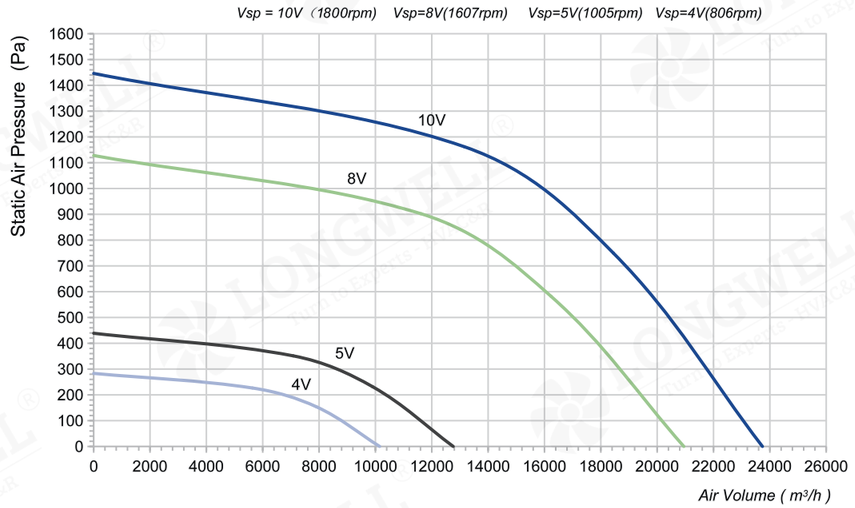

LWBE3G560-218NT-13 (without bracket)

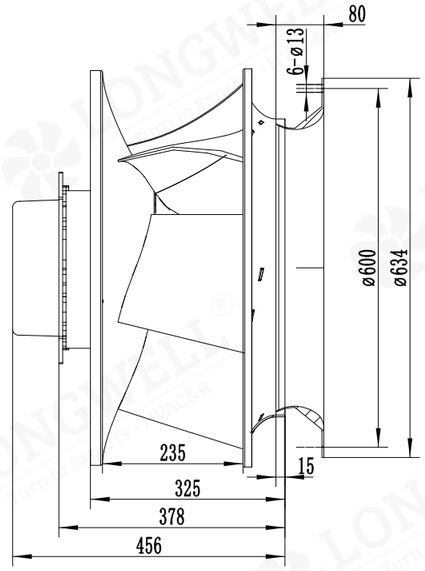

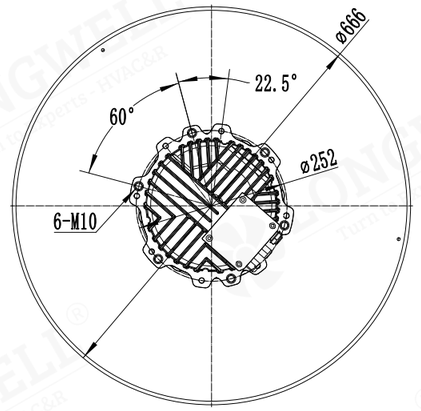

LWBE3G560-218PT-06 (with bracket)

