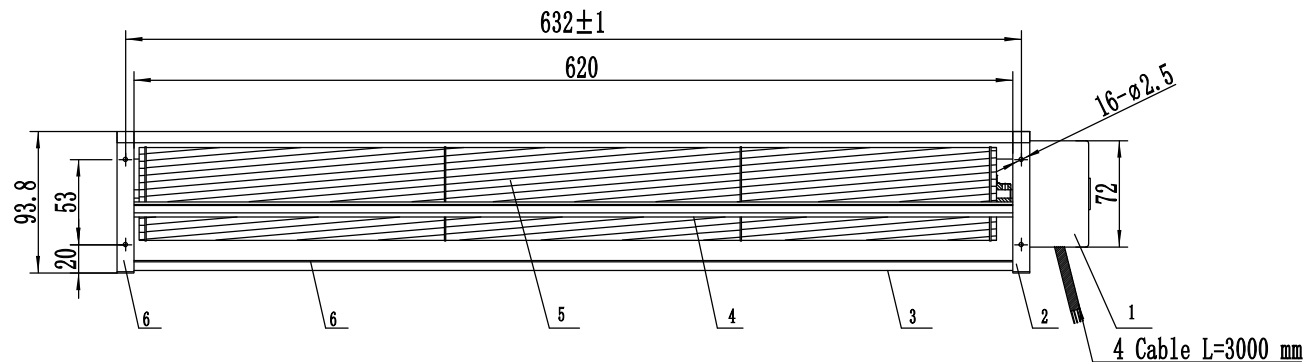



Technical Request

- 1.The appearance and surface of the product should be clean, without rust spots, mildew, scratches, No obvious burr and other surface defects.
- 2.Shell riveted firmly, no obvious gap, size in line with the drawing requirements.
- 3.Make the impeller $\phi 65 \times 600$, diagonal flow, 30 blades, steel shaft $\phi 6$, bushing $\phi 6$
- 4.Safety performance in accordance with GB/T13933-2008 regulations.
- 5.Unnoted tolerance is GB/T1804-v.

No.	Item	Material	Qty
1	Motor		1
2	Right Side Plate	Iron	1
3	Air Outlet Plate	Al	1
4	Air Inlet Plate	Al	1
5	Impeller	Al	1
6	Screen	Iron	1
7	Left Side Plate	Iron	1

SPECIFICATION

VOLTAGE (V)	24
CURRENT (A)	1.23
SPEED (r/min)	1600
AIR VOLUME (m ³ /h)	770
BEARINGS	Ball bearing
INPUT POWER (W)	29

Stage Mark				Material		Ratio	1:1	Weight
S								
Version	A1	Name	Date	Ningbo Longwell Electric Technology Co., Limited				
		Design	JIN	2023.09.19	LWCD-65620MN-02			
		Audit						
		Technical						
		Standard						
Mark	Qty	Sign	Name	Date	Approve			
				第 1 页 共 1 页				