


Delivery Premium Quality Fans Globally for Healthier Breathing

World's Largest Selection of Fan Products
World's Most Comprehensive Fan Solutions

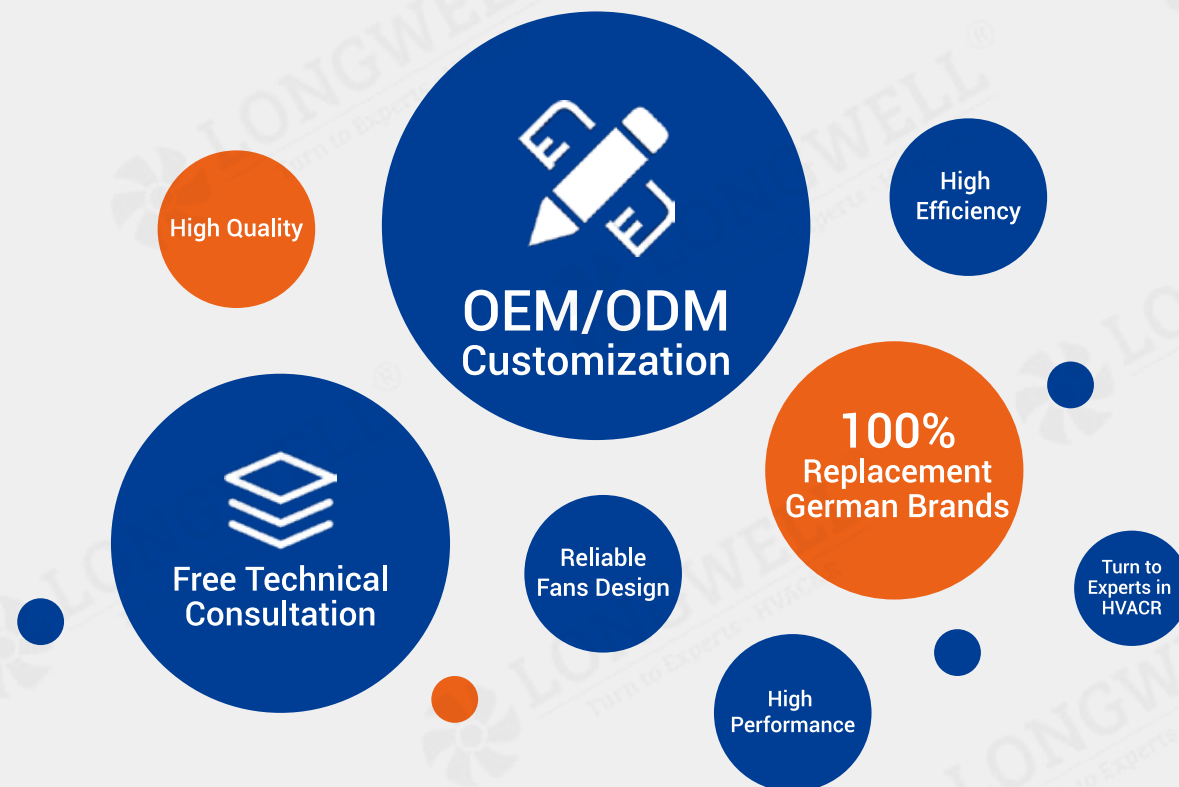

Ningbo Longwell Electric Technology Co., Ltd

Headquarter: NO.100, South of Xuxiang River, Yuyao, Zhejiang Province, China 315400

Tell: +86 574 6218 9863

Fax: +86 574 6218 9863

Phone: +86 180 5854 5395

Web: www.longwellfans.com | www.longwell-group.com | www.longwell-media.com

Email: sales@longwellfans.com



LONGWELL TECHNOLOGY

*"Born for High-Quality Breathing
LONGWELL Fans Power Your Equipments"*



**Professional Manufacturer
of HVACR Fan & Motors**

—— AC Forward Centrifugal Fan

Longwell Group

Longwell-China

Longwell-USA

Longwell-Russia

Longwell-Europe

CATALOGUE

01-02

About Longwell

03-04

Testing and Standards

05

Type Code

06-14

AC Forward Centrifugal Fan(Φ 108- Φ 180)

15-23

AC Forward Centrifugal Fan(Φ 200- Φ 500)



About Longwell

Born for High-Quality Breathing, LONGWELL Fans Power Your Equipment

OEM for Well-Known Brands

Supplies Fortune 500 Companies

Global Technical Support

LONGWELL is a leading fan manufacturer, specializing in high-quality fans, blowers, motors, and components for heating, ventilation, air conditioning, and refrigeration applications. We have a strong presence in delivery capabilities, design and R&D capabilities, as well as manufacturing, placing us at the forefront of the industry.

Our product range includes EC/DC/AC centrifugal fans, axial fans, AC/BLDC cross-flow fans, single/double forward curved fans, AC/BLDC/ECM motors, and industrial fan blowers. Since our establishment in 1990, we have continuously upgraded our facilities and production capacity, boasting advanced testing labs and production facilities with an annual capacity of millions of fans. With over 20 years of experience, we are highly skilled in the design, development, and manufacture of fans and motors. We export to over 30 countries and serve numerous Fortune 500 clients.

Our facilities and products are compliant with certifications such as ISO9001, ISO14001, BSCI, CE, UL/ETL, CCC, EMC, and LVD. These certifications demonstrate our compliance in quality management, environmental management, social responsibility, and product safety. We are quality-oriented and dedicated to providing products and services that meet international standards.



Equipped with advanced testing labs and production facilities, including a B&K noise lab, CFD simulation lab, air dynamics test chambers, automatic welding machines, CNC machining centers, and auto robot injection machines, we ensure efficient production and on-time delivery.

As industry leaders, we prioritize technological innovation and efficiency. We employ advanced technologies such as aerodynamics principles and CFD simulation to ensure precise and efficient fan designs. Additionally, we offer customized services to design and manufacture fan systems according to specific customer requirements. Our focus is on providing high-tech, high-efficiency products that meet our customers' needs and contribute to a better future.

At LONGWELL, innovation is at the core of our operations, driving continuous improvement. With our extensive experience and expertise, we can quickly customize solutions that meet customer needs. We emphasize technological sophistication, utilizing advanced technologies and high-performance materials to deliver products that are efficient, safe, and reliable. Our brand is widely recognized globally, and we are committed to promoting sustainable development and advancing the efficient fan industry.

LONGWELL looks forward to collaborating with you and providing high-quality customized fan and motor solutions. Please feel free to contact us as we work together to create a brighter future.

193

Staff

40000m²

Floor Space

500⁺

Branding Clients

1Million⁺ PCS


Annual Outputs

6

Overseas offices
on spot support

50⁺

Members
R&D Team

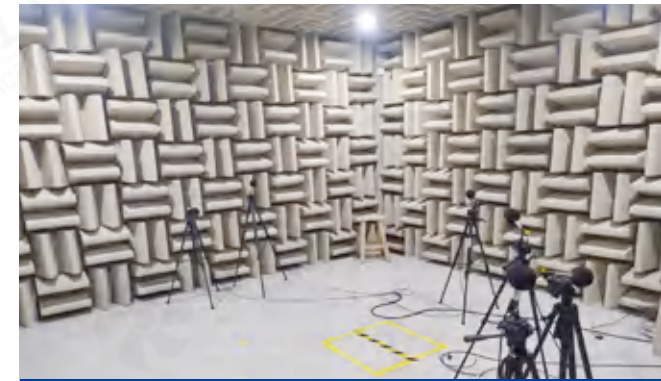


B&K Noise Testing Lab



Production Line



Automatic Welding

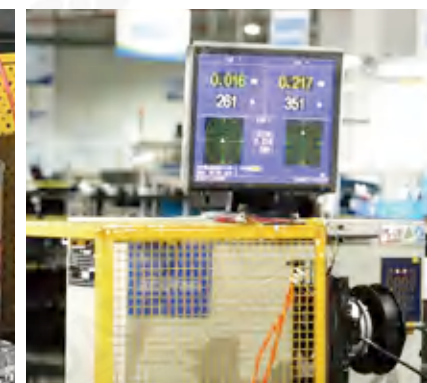

Balance Machine



Automatic Welding Machine



Production Line - Centrifugal Fan



Automatic CNC machine



Air Dynamic Test Lab



Production Line - Axial Fans



Production Line

Testing and Standards

- ISO GB/T 19001-2016 idt ISO 9001:2015/GB/T 24001-2016 idt ISO 14001:2015/GB/T 45001-2020 idt ISO 45001:2018
- UL 507:2017 Ed.10+R:27/CSA C22.2#113:2018 Ed.11
- BSCI ANSI C63.4:2014/ANSI C63.4a-2017
- EN IEC 55014-1:2021/EN IEC 55014-2:2021/EN IEC 61000-3-2:2019 +A1:2021
EN 61000-3-3:2013 +A1:2019 +A2:2021 +AC:2022-01
EN 60335-2-80:2003 +A1:2004 +A2:2009;
EN 60335-1:2012 +A1:2014 +A13:2017 +A1:2019+A14:2019 +A2:2019+A15:2021
EN 62321-1:2013/EN 62321-2:2014/EN 62321-3-1:2014
EN 62321-4:2014+A1:2017/EN 62321-5:2014/EN 62321-6:2015
EN 62321-7-1:2015/EN 62321-7-2:2017/EN 62321-8:2017



Enterprise Credit Evaluation Certificate - Highest Level in China



Own-Brand



Own-Brand




ETL




ETL



CE

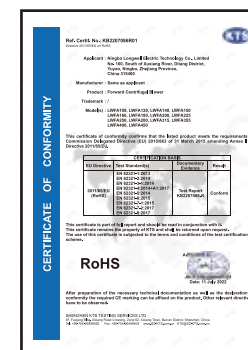


RoHS

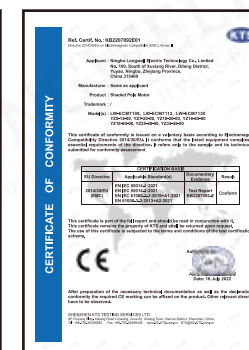


CE



CE

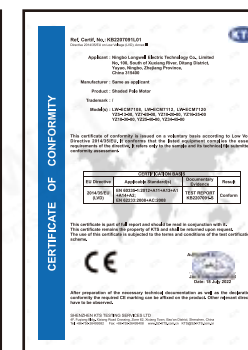

CE

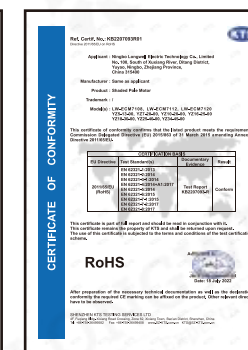

RoHS




ETL




ETL



ETL

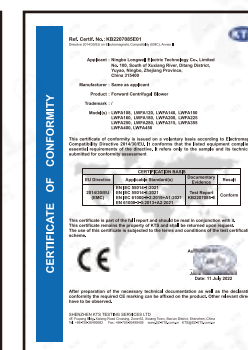

CE

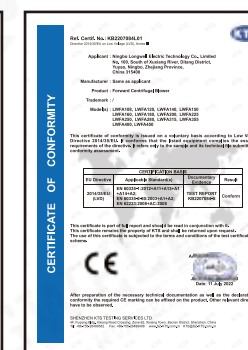


CE




ISO 9001




ISO 9001

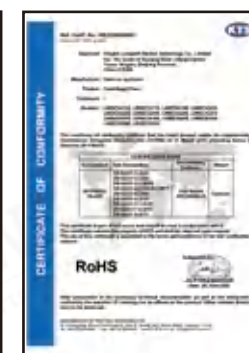


RoHS

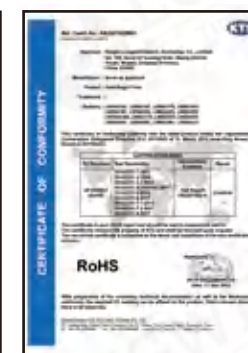


RoHS

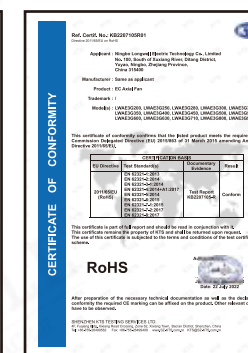

RoHS



RoHS




RoHS



CE



CE



CE

Type Code

LW F A 2E 108 - 072 N S - 01

Series number

T-380VAC S-230VAC U-115V
L-12VDC M-24VDC
H-48VDC Z-310VDC

N-Without housing/bracket
S-Single inlet with housing
D-Dual-inlet with housing
P-with bracket

Diameter of Rotor:072/092/102/138/188/218

Diameter of Impeller

2E-2pole 4E-4pole 6E-6 pole 6D-6pole
8D-8pole 3G-3 phase 1G-Single phase

A-AC D-DC E-EC

B-Backward F-Forward


LW-Longwell

AC Forward Centrifugal Fan

Professional HVAC Fan &Motors Manufacturer



LWFA-108 Serise

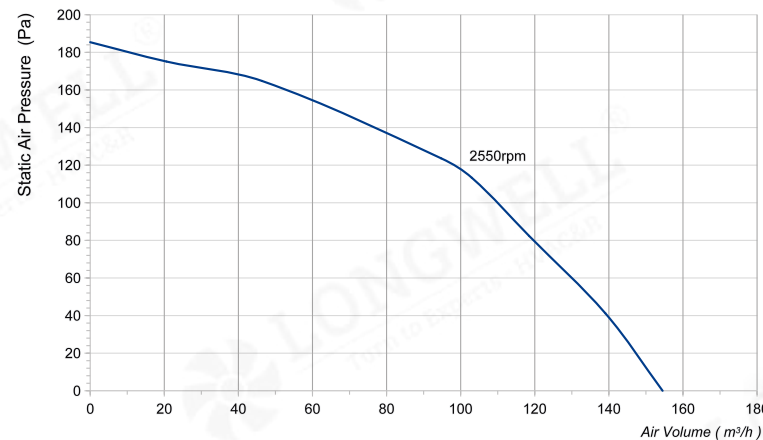



Product Characteristic

- Material: Galvanised sheet steel
- Bearing: Maintenance-free ball bearings
- Mode of Operation: S1
- Type of Protection: IP54
- Insulation Class: B
- Operation Temperature: -30 C ~ +60 C




Technical Specifications

Model	Voltage (V)	Frequency (Hz)	Power (W)	Current (A)	Speed (RPM)	Air Flow (m³/h)	Air Pressure (Pa)	Noise [dB(A)]	Capacitor	Curve
LWFA2E108-072NS-01	230	50	30	/	2550	155	185	53	1uF	/

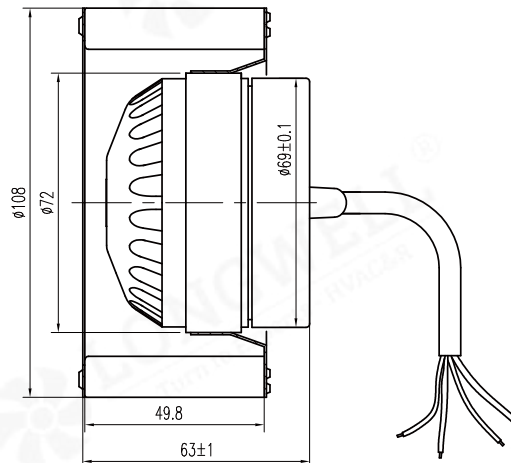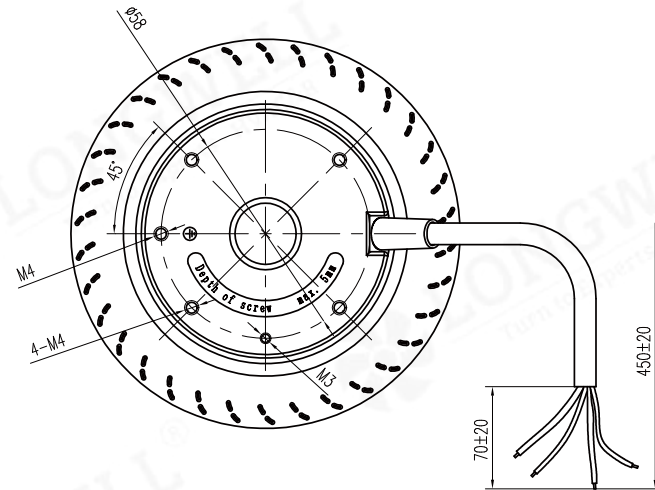

LWFA-120 Serise

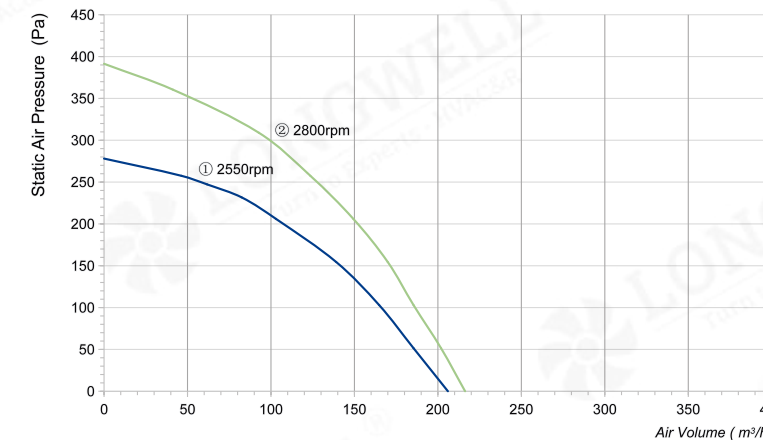



Product Characteristic

- Material: Galvanised sheet steel
- Bearing: Maintenance-free ball bearings
- Mode of Operation: S1
- Type of Protection: IP54
- Insulation Class: F
- Operation Temperature: -30 C ~ +60 C




Technical Specifications

Model	Voltage (V)	Frequency (Hz)	Power (W)	Current (A)	Speed (RPM)	Air Flow (m³/h)	Air Pressure (Pa)	Noise [dB(A)]	Capacitor	Curve
LWFA2E120-092NS-01	230	50	50	0.25	2550	206	278	51	1.5uF	①
LWFA2E120-092NS-02	230	60	63	0.3	2800	216	391	53	1.5uF	②

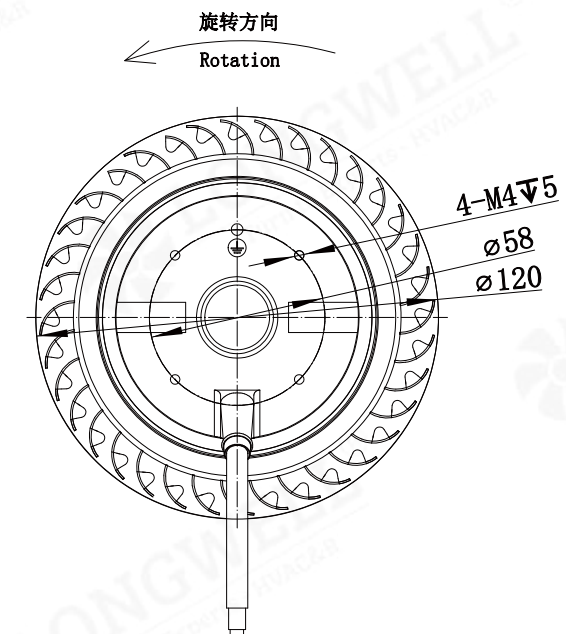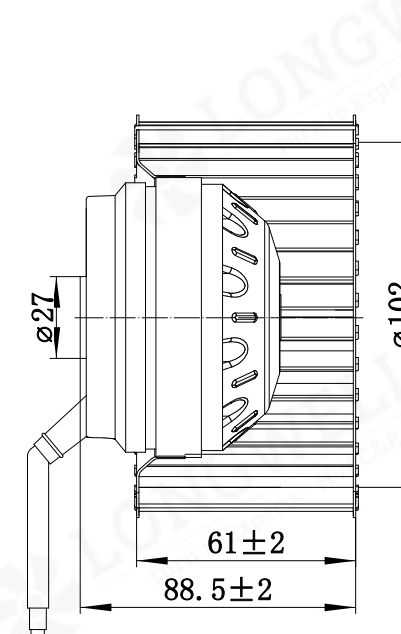

LWFA-133 Serise

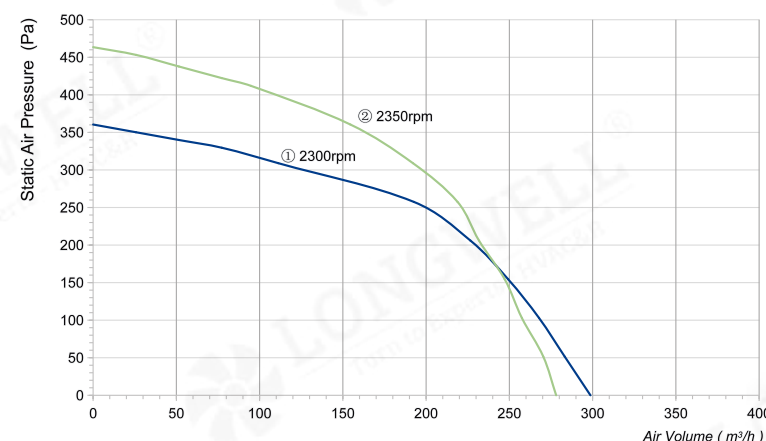


Product Characteristic

- Material: Galvanised sheet steel
- Bearing: Maintenance-free ball bearings
- Mode of Operation: S1
- Type of Protection: IP54
- Insulation Class: F
- Operation Temperature: -30 C ~ +60 C




Technical Specifications

Model	Voltage (V)	Frequency (Hz)	Power (W)	Current (A)	Speed (RPM)	Air Flow (m³/h)	Air Pressure (Pa)	Noise [dB(A)]	Capacitor	Curve
LWFA2E133-092NS-01	230	50	83	0.32	2300	299	361	61	2uF	①
LWFA2E133-092NS-02	230	60	95	0.4	2350	278	464	63	2uF	②

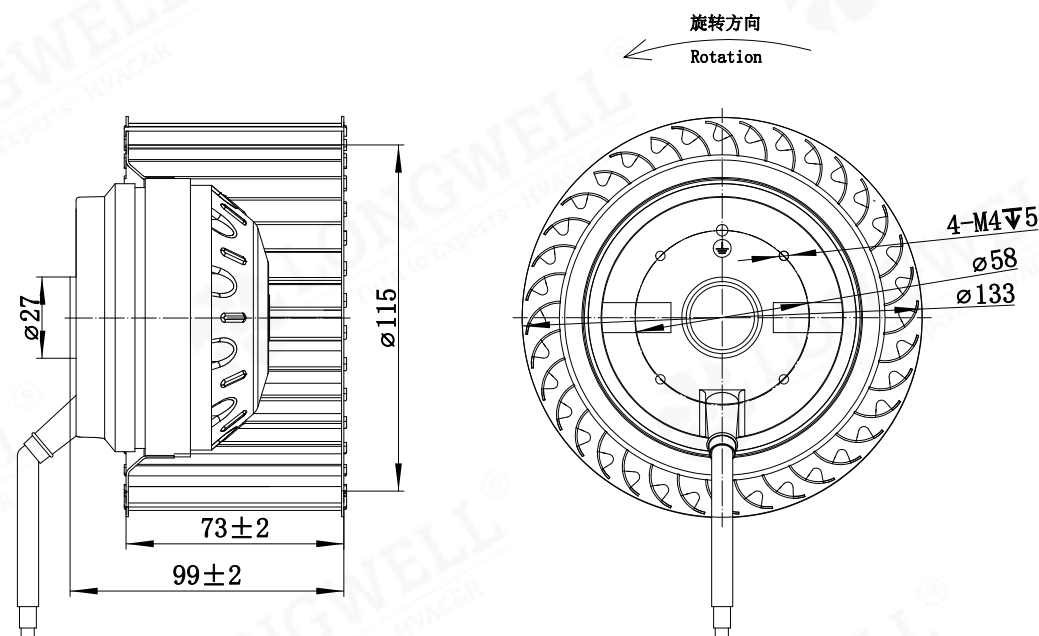

LWFA-140 Serise

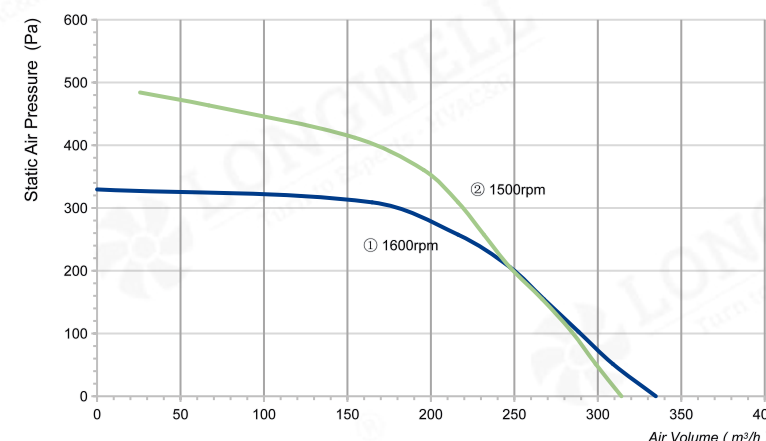


Product Characteristic

- Material: Galvanised sheet steel
- Bearing: Maintenance-free ball bearings
- Mode of Operation: S1
- Type of Protection: IP54
- Insulation Class: F
- Operation Temperature: -30 C ~ +60 C




Technical Specifications

Model	Voltage (V)	Frequency (Hz)	Power (W)	Current (A)	Speed (RPM)	Air Flow (m³/h)	Air Pressure (Pa)	Noise [dB(A)]	Capacitor	Curve
LWFA2E140-092NS-01	230	50	100	0.42	1600	335	330	52	2uF	①
LWFA2E140-092NS-02	230	60	110	0.47	1500	314	484	58	2uF	②

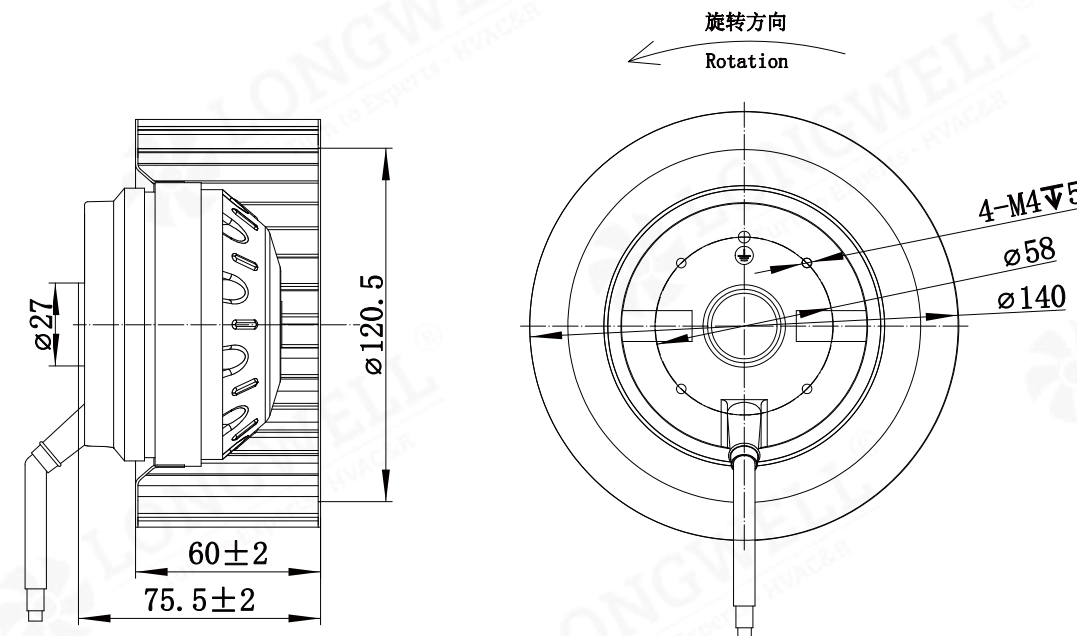

LWFA-140 Serise

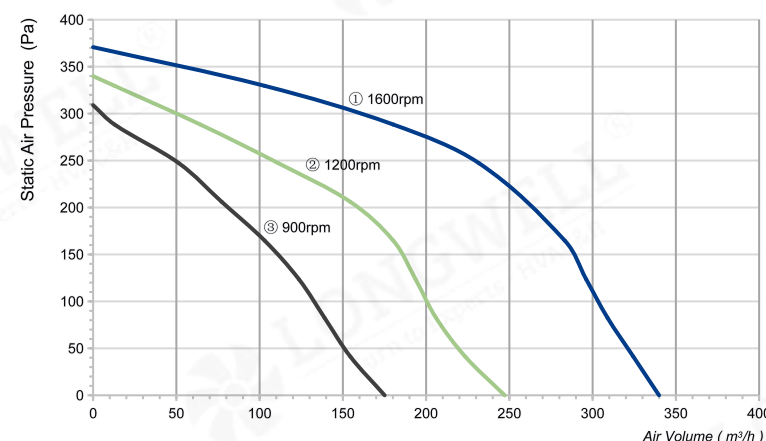


Product Characteristic

- Material: Galvanised sheet steel
- Bearing: Maintenance-free ball bearings
- Mode of Operation: S1
- Type of Protection: IP54
- Insulation Class: F
- Operation Temperature: -30 C ~ +60 C




Technical Specifications

Model	Voltage (V)	Frequency (Hz)	Power (W)	Current (A)	Speed (RPM)	Air Flow (m³/h)	Air Pressure (Pa)	Noise [dB(A)]	Capacitor	Curve
LWFA2E140-092NS-03	230	50	100	0.42	1600	340	371	52	2uF	①
			65	0.3	1200	247	340	40	2uF	②
			40	0.2	900	175	309	32	2uF	③

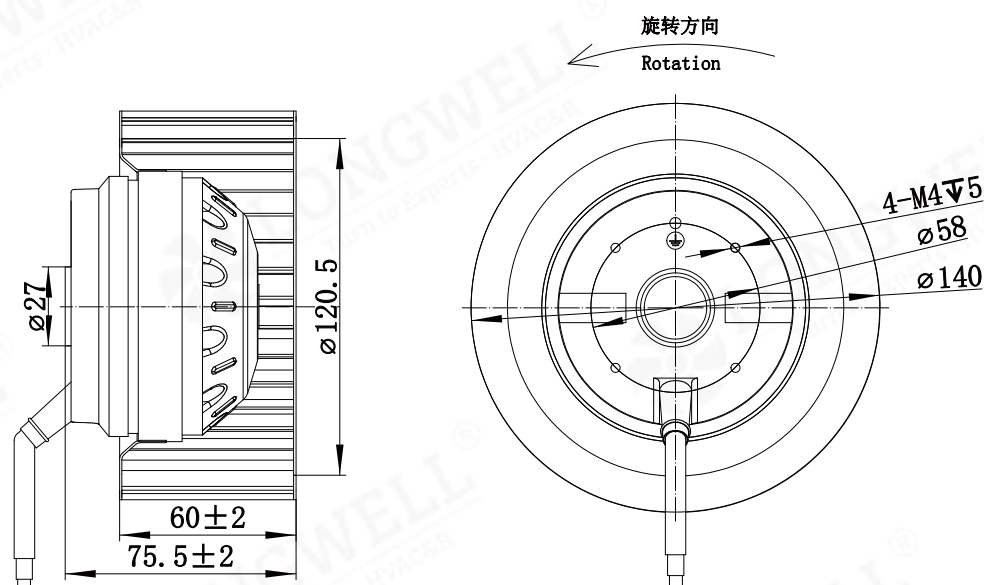

LWFA-150 Serise

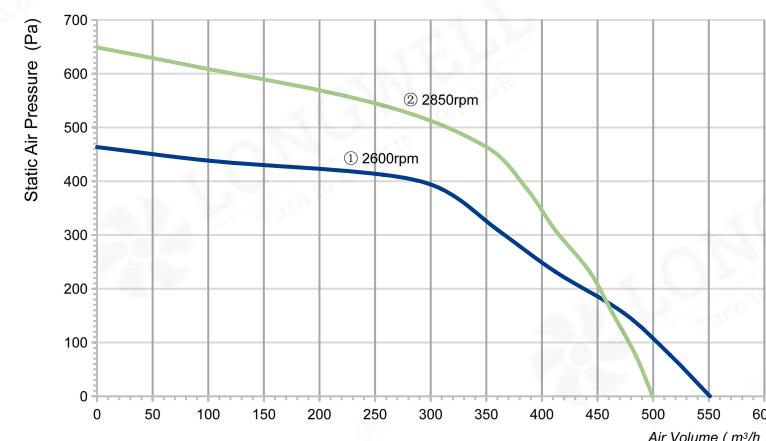


Product Characteristic

- Material: Galvanised sheet steel
- Bearing: Maintenance-free ball bearings
- Mode of Operation: S1
- Type of Protection: IP54
- Insulation Class: F
- Operation Temperature: -30 C ~ +60 C




Technical Specifications

Model	Voltage (V)	Frequency (Hz)	Power (W)	Current (A)	Speed (RPM)	Air Flow (m³/h)	Air Pressure (Pa)	Noise [dB(A)]	Capacitor	Curve
LWFA2E150-092NS-01	230	50	135	0.65	2600	551	464	67	4uF	①
LWFA2E150-092NS-02	230	60	180	0.82	2850	500	649	71	4uF	②

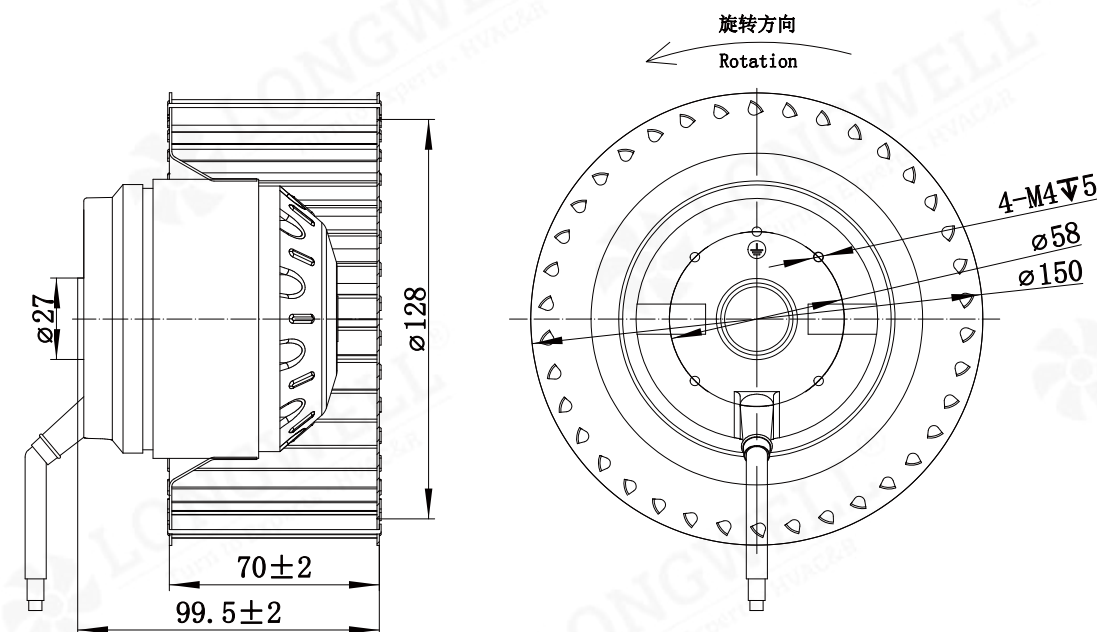

LWFA-160 Serise

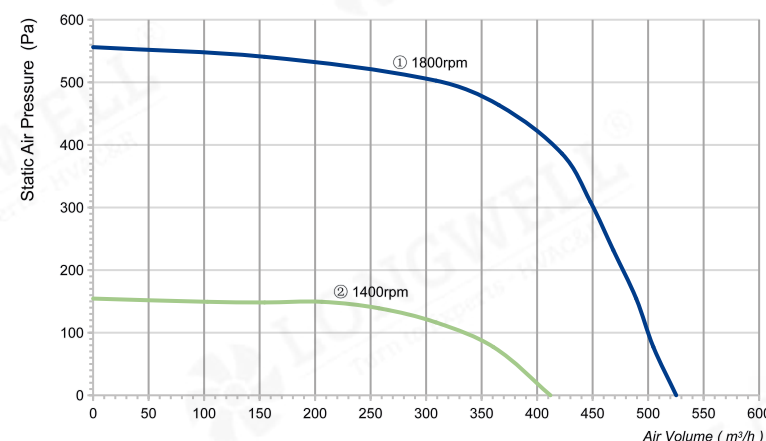


Product Characteristic

- Material: Galvanised sheet steel
- Bearing: Maintenance-free ball bearings
- Mode of Operation: S1
- Type of Protection: IP54
- Insulation Class: F
- Operation Temperature: -30 °C ~ +60 °C




Technical Specifications

Model	Voltage (V)	Frequency (Hz)	Power (W)	Current (A)	Speed (RPM)	Air Flow (m³/h)	Air Pressure (Pa)	Noise [dB(A)]	Capacitor	Curve
LWFA2E160-092NS-01	230	50	230	1	1800	525	556	69	4uF	①
LWFA4E160-092NS-02	230	50	68	0.3	1400	412	155	58	2uF	②

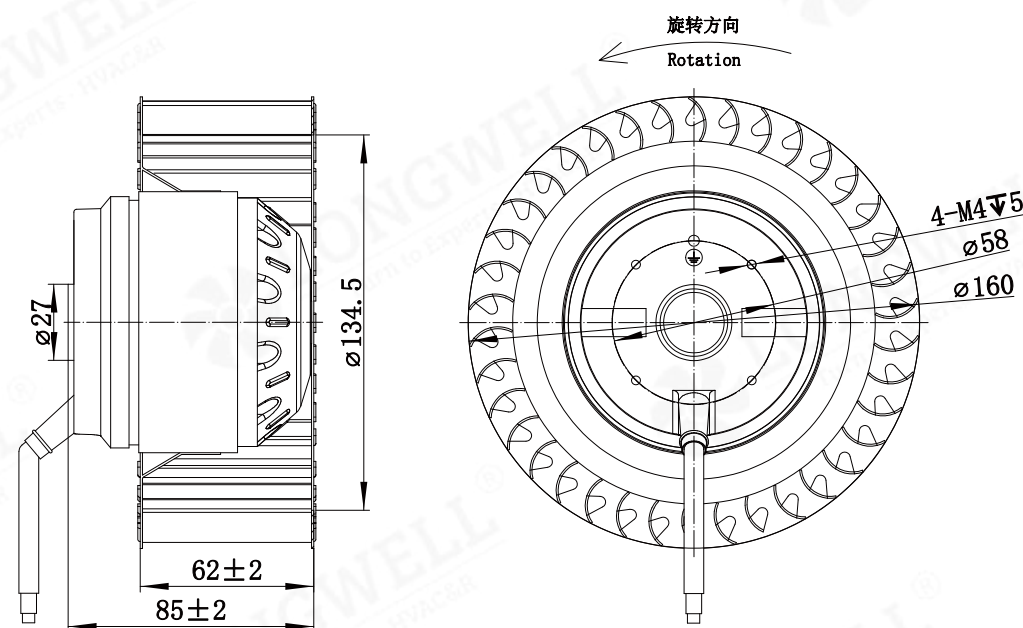

LWFA-180 Serise

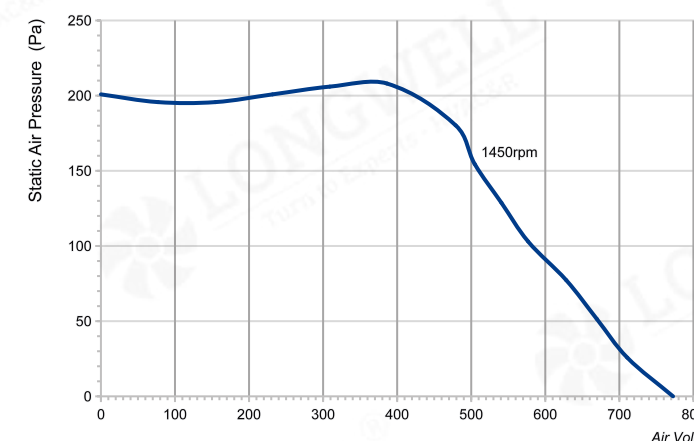


Product Characteristic

- Material: Galvanised sheet steel
- Bearing: Maintenance-free ball bearings
- Mode of Operation: S1
- Type of Protection: IP54
- Insulation Class: F
- Operation Temperature: -30 °C ~ +60 °C




Technical Specifications

Model	Voltage (V)	Frequency (Hz)	Power (W)	Current (A)	Speed (RPM)	Air Flow (m³/h)	Air Pressure (Pa)	Noise [dB(A)]	Capacitor	Curve
LWFA4E180-092NS-01	230	50	85	0.52	1450	773	196	69	3uF	/

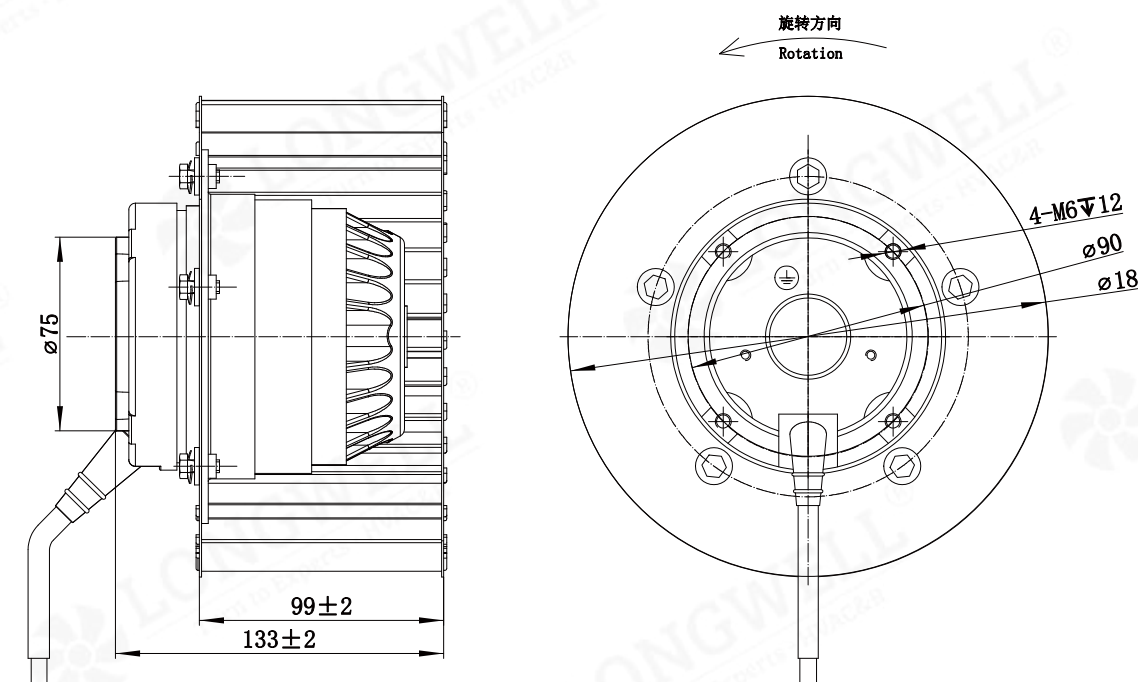

LWFA-200 Serise

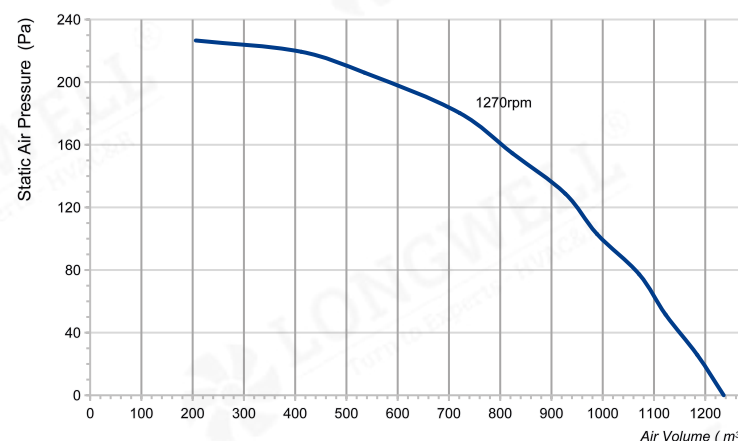


Product Characteristic

- Material: Galvanised sheet steel
- Bearing: Maintenance-free ball bearings
- Mode of Operation: S1
- Type of Protection: IP54
- Insulation Class: F
- Operation Temperature: -30 C ~ +60 C




Technical Specifications

Model	Voltage (V)	Frequency (Hz)	Power (W)	Current (A)	Speed (RPM)	Air Flow (m³/h)	Air Pressure (Pa)	Noise [dB(A)]	Capacitor	Curve
LWFA4D200-102NT-01	380	50	330	0.63	1270	1236	227	59	/	/
LWFA4E200-102NS-02	230	50	330	1.52	1280	1236	227	59	8	/

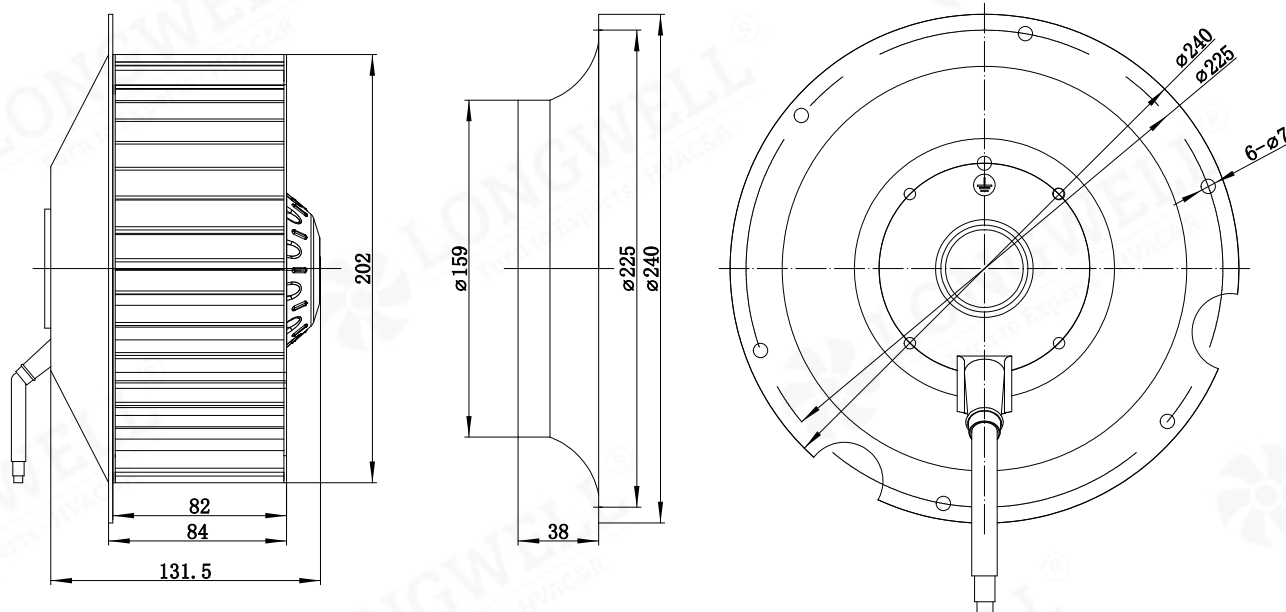

LWFA-225 Serise

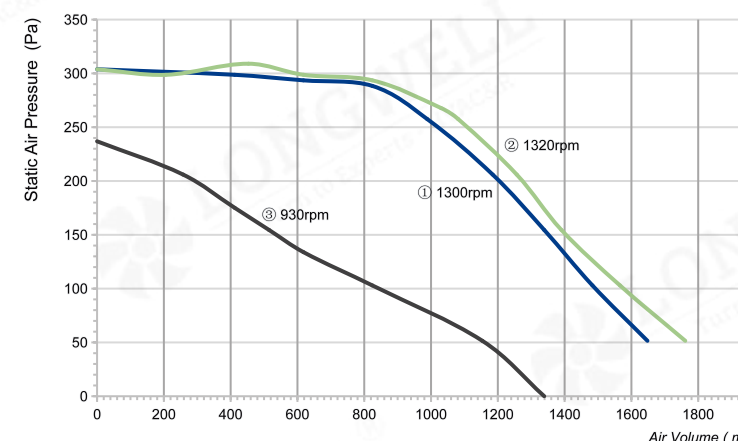


Product Characteristic

- Material: Galvanised sheet steel
- Bearing: Maintenance-free ball bearings
- Mode of Operation: S1
- Type of Protection: IP54
- Insulation Class: F
- Operation Temperature: -30 C ~ +60 C




Technical Specifications

Model	Voltage (V)	Frequency (Hz)	Power (W)	Current (A)	Speed (RPM)	Air Flow (m³/h)	Air Pressure (Pa)	Noise [dB(A)]	Capacitor	Curve
LWFA4D225-138NT-01	380	50	490	0.82	1300	1648	288	65	/	①
LWFA4E225-138NS-02	230	50	510	2.3	1320	1761	288	65	15	②
LWFA6D225-138NT-03	380	50	300	0.81	930	1339	237	59	/	③

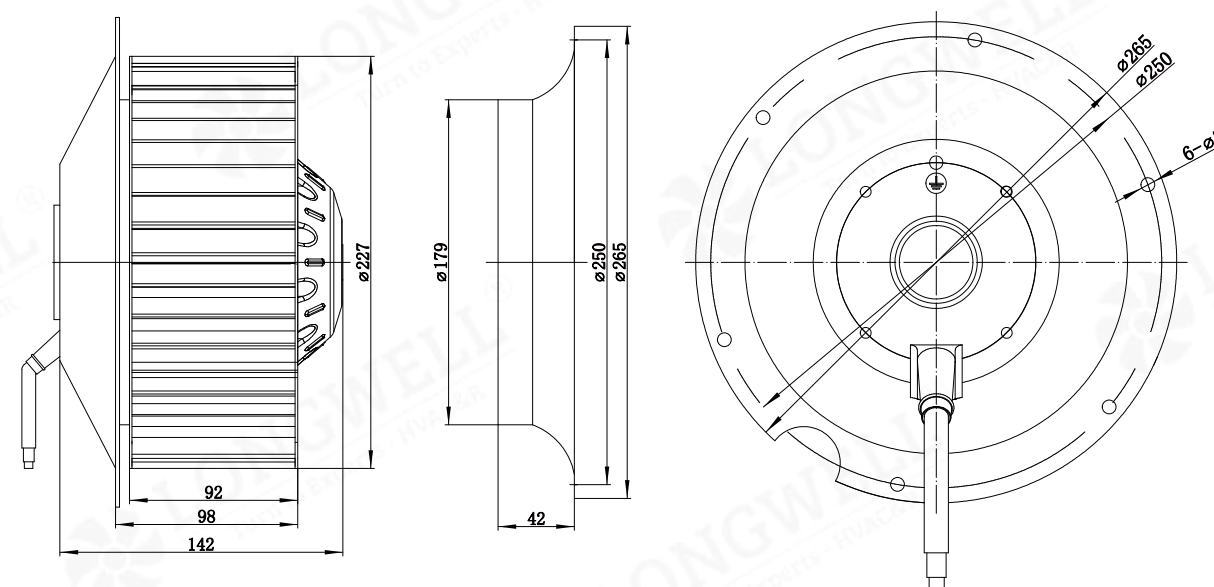

LWFA-250 Serise

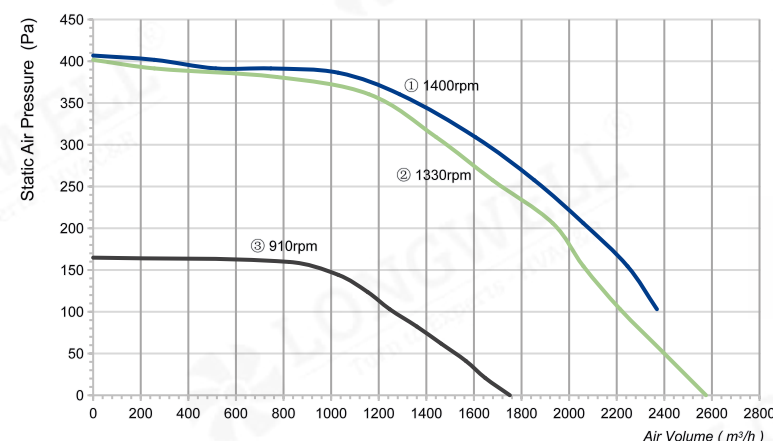


Product Characteristic

- Material: Galvanised sheet steel
- Bearing: Maintenance-free ball bearings
- Mode of Operation: S1
- Type of Protection: IP54
- Insulation Class: F
- Operation Temperature: -30°C ~ +60°C




Technical Specifications

Model	Voltage (V)	Frequency (Hz)	Power (W)	Current (A)	Speed (RPM)	Air Flow (m³/h)	Air Pressure (Pa)	Noise [dB(A)]	Capacitor	Curve
LWFA4D250-138NT-01	380	50	870	1.8	1400	2369	407	72	/	①
LWFA4E250-138NS-02	220	50	900	4.1	1330	2575	402	72	25	②
LWFA6D250-102NT-03	380	50	320	0.81	910	1751	165	62	/	③
LWFA6E250-102NS-04	220	50	320	1.6	900	1751	165	62	10	③

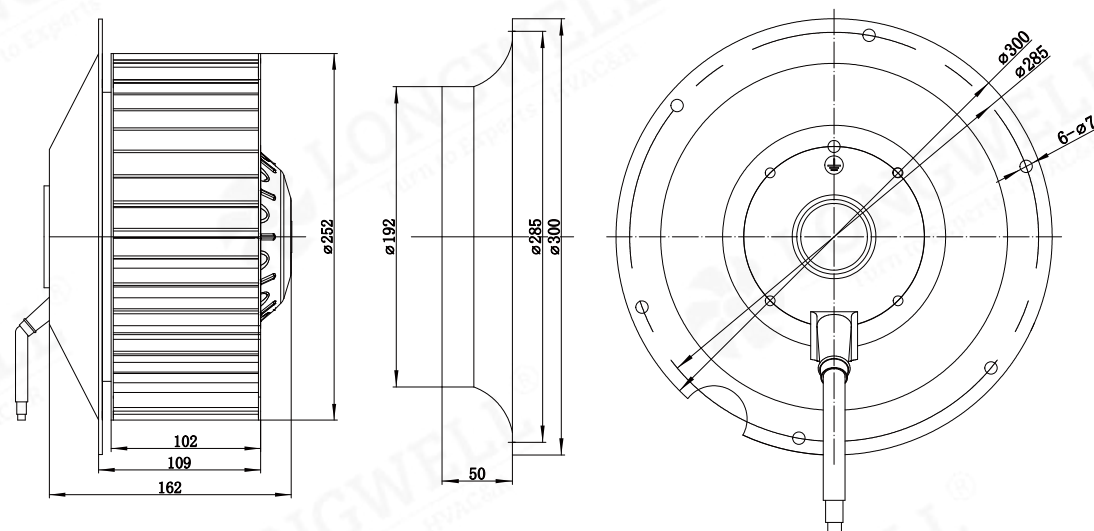

LWFA-280 Serise

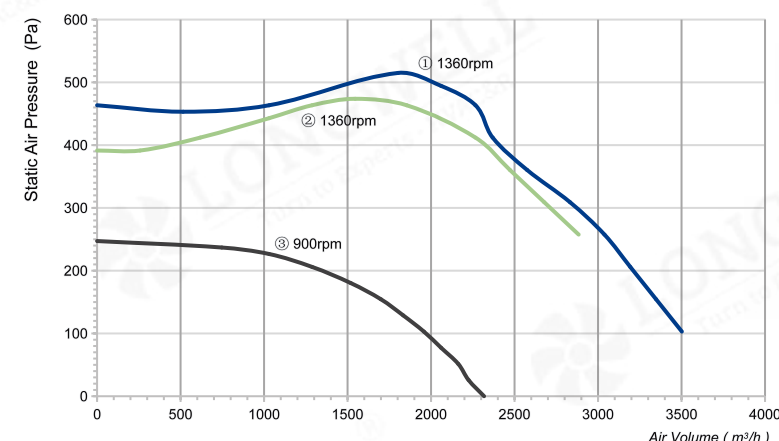


Product Characteristic

- Material: Galvanised sheet steel
- Bearing: Maintenance-free ball bearings
- Mode of Operation: S1
- Type of Protection: IP54
- Insulation Class: F
- Operation Temperature: -30°C ~ +60°C



Technical Specifications

Model	Voltage (V)	Frequency (Hz)	Power (W)	Current (A)	Speed (RPM)	Air Flow (m³/h)	Air Pressure (Pa)	Noise [dB(A)]	Capacitor	Curve
LWFA4D280-188NT-01	380	50	1700	3.2	1360	3502	464	77	/	①
LWFA4E280-188NS-02	220	50	1600	7.3	1360	2884	391	77	30	②
LWFA6D280-138NT-03	380	50	450	0.88	900	2318	247	65	/	③
LWFA6E280-138NS-04	220	50	450	2.5	900	2318	247	65	15	③

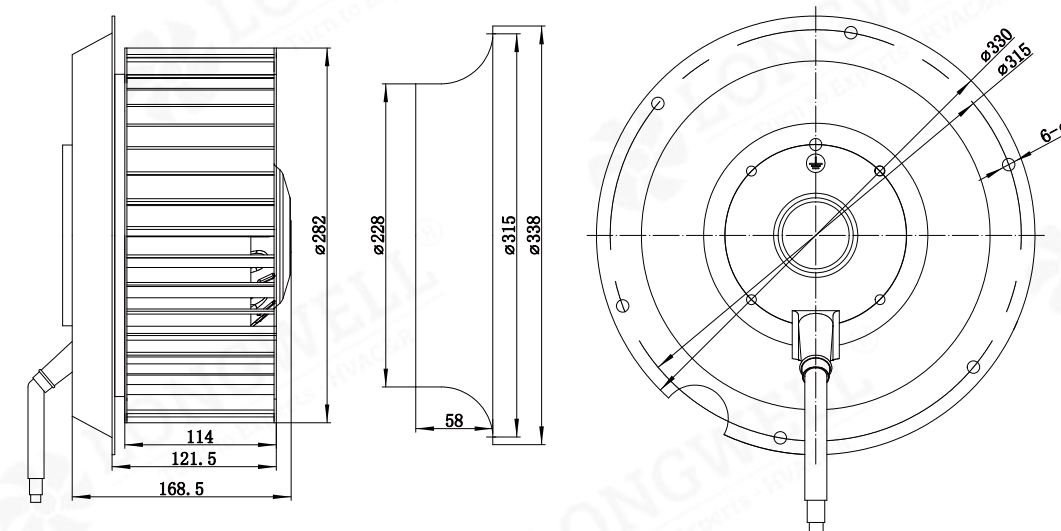

LWFA-355 Serise




Product Characteristic

- | | | | |
|----------------------|--------------------------------|--------------------------|-----------------|
| • Material: | Galvanised sheet steel | • Type of Protection: | IP54 |
| • Bearing: | Maintenance-free ball bearings | • Insulation Class: | F |
| • Mode of Operation: | S1 | • Operation Temperature: | -30 °C ~ +60 °C |




Technical Specifications

Model	Voltage (V)	Frequency (Hz)	Power (W)	Current (A)	Speed (RPM)	Air Flow (m³/h)	Air Pressure (Pa)	Noise [dB(A)]	Capacitor	Curve
LWFA4D355-188NT-01	380	50	3500	5.9	1340	5665	906	80	/	①
LWFA6D355-188NT-02	380	50	1150	2.3	900	4172	412	70	/	②

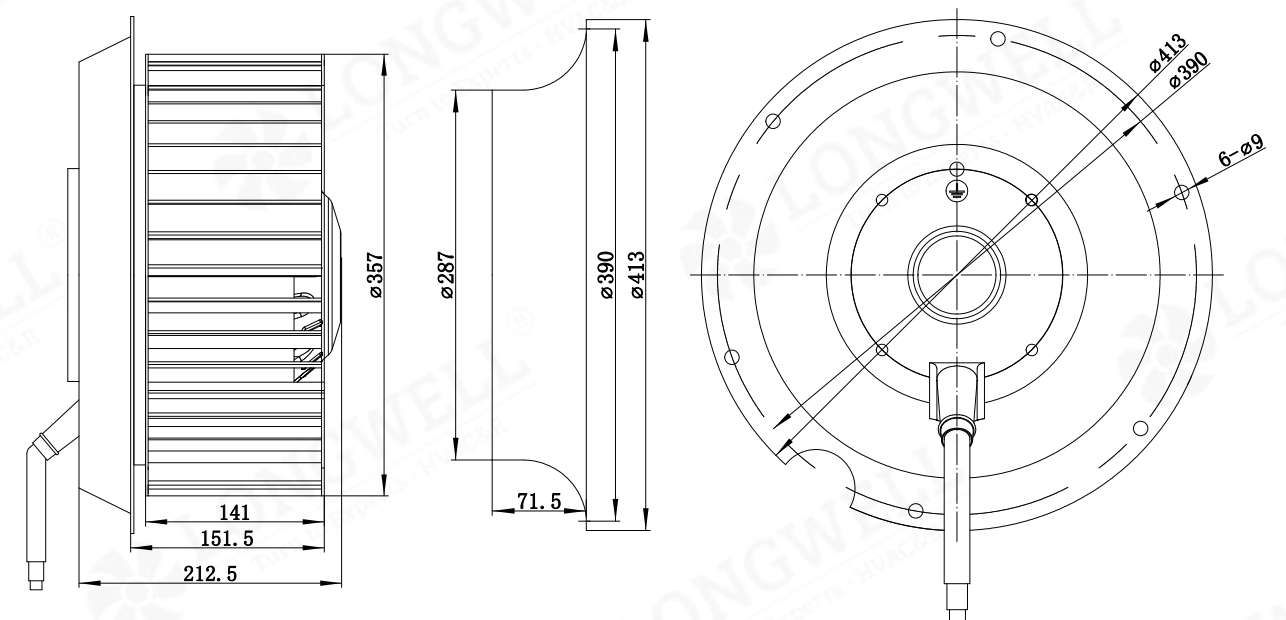

LWFA-400 Serise

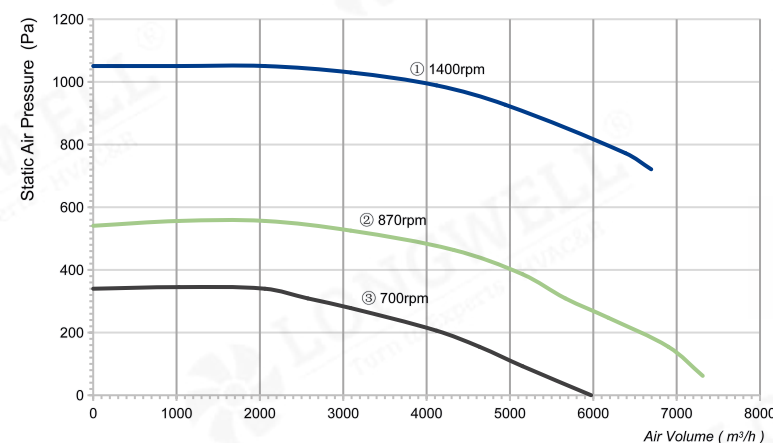


Product Characteristic

- Material: Galvanised sheet steel
- Bearing: Maintenance-free ball bearings
- Mode of Operation: S1
- Type of Protection: IP54
- Insulation Class: F
- Operation Temperature: -30 C ~ +60 C




Technical Specifications

Model	Voltage (V)	Frequency (Hz)	Power (W)	Current (A)	Speed (RPM)	Air Flow (m³/h)	Air Pressure (Pa)	Noise [dB(A)]	Capacitor	Curve
LWFA4D400-188NT-01	380	50	4800	8	1400	6695	1030	82	/	①
LWFA6D400-188NT-02	380	50	2800	4.8	870	7313	541	74	/	②
LWFA8D400-188NT-03	380	50	1700	3.7	700	5974	345	65	/	③

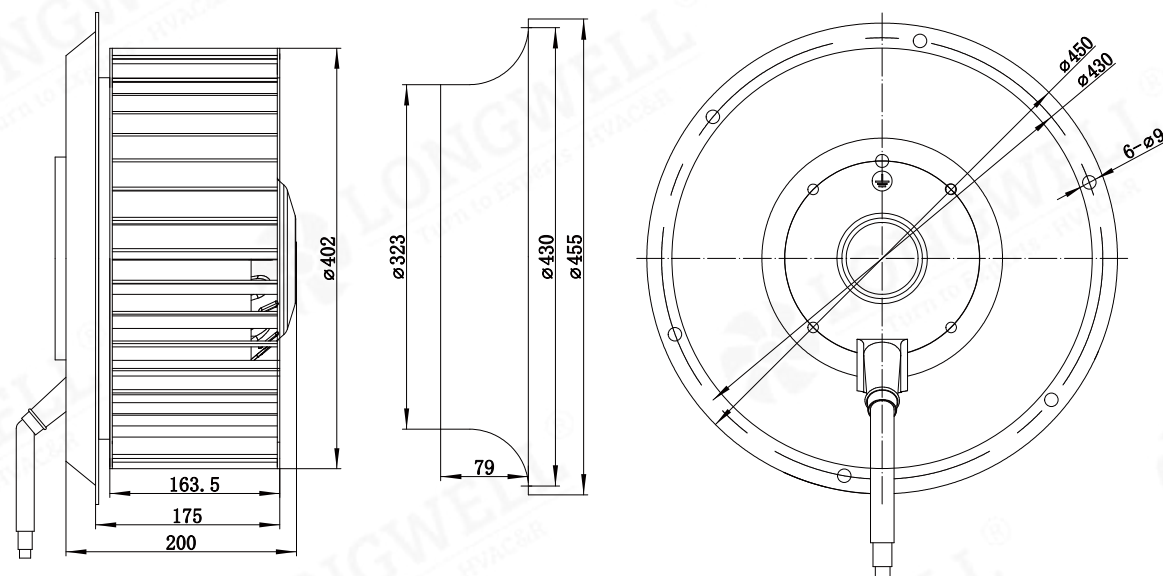

LWFA-450 Serise

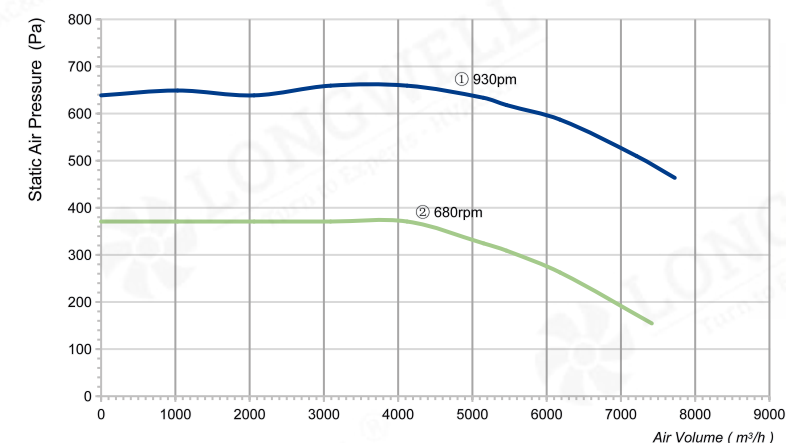


Product Characteristic

- Material: Galvanised sheet steel
- Bearing: Maintenance-free ball bearings
- Mode of Operation: S1
- Type of Protection: IP54
- Insulation Class: F
- Operation Temperature: -30 C ~ +60 C




Technical Specifications

Model	Voltage (V)	Frequency (Hz)	Power (W)	Current (A)	Speed (RPM)	Air Flow (m³/h)	Air Pressure (Pa)	Noise [dB(A)]	Capacitor	Curve
LWFA6D450-188NT-01	380	50	3500	5.9	930	7725	639	74	/	①
LWFA8D450-188NT-02	380	50	2000	4.1	680	7416	371	68	/	②

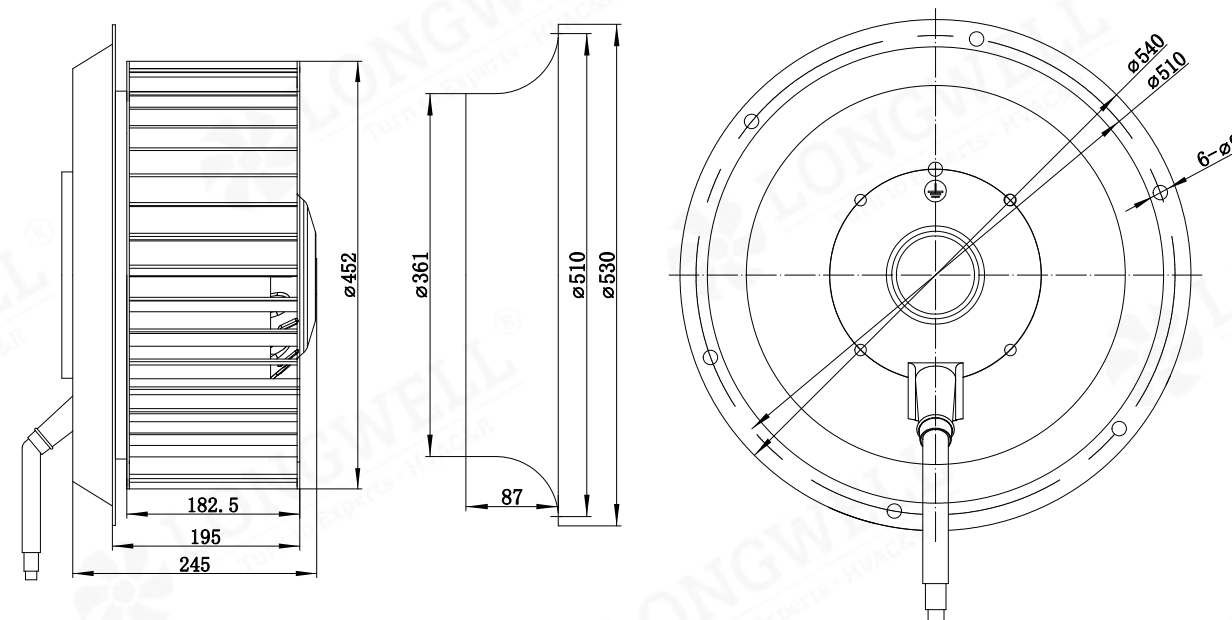

LWFA-500 Serise

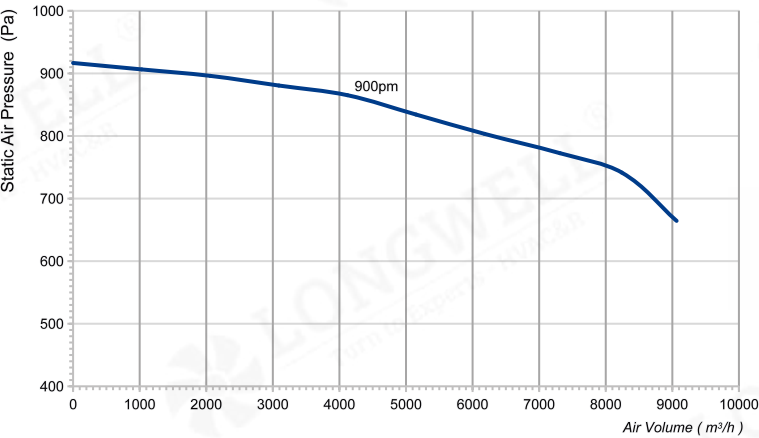

Product Characteristic

- Material: Galvanised sheet steel
- Bearing: Maintenance-free ball bearings
- Mode of Operation: S1
- Type of Protection: IP54
- Insulation Class: B
- Operation Temperature: -30 C ~+60 C



Technical Specifications

Model	Voltage (V)	Frequency (Hz)	Power (W)	Current (A)	Speed (RPM)	Air Flow (m³/h)	Air Pressure (Pa)	Noise [dB(A)]	Capacitor	Curve
LWFA6D500-188NT-01	380	50	4400	7.6	900	9064	917	75	/	/

