


Delivery Premium Quality Fans Globally for Healthier Breathing

World's Largest Selection of Fan Products
World's Most Comprehensive Fan Solutions

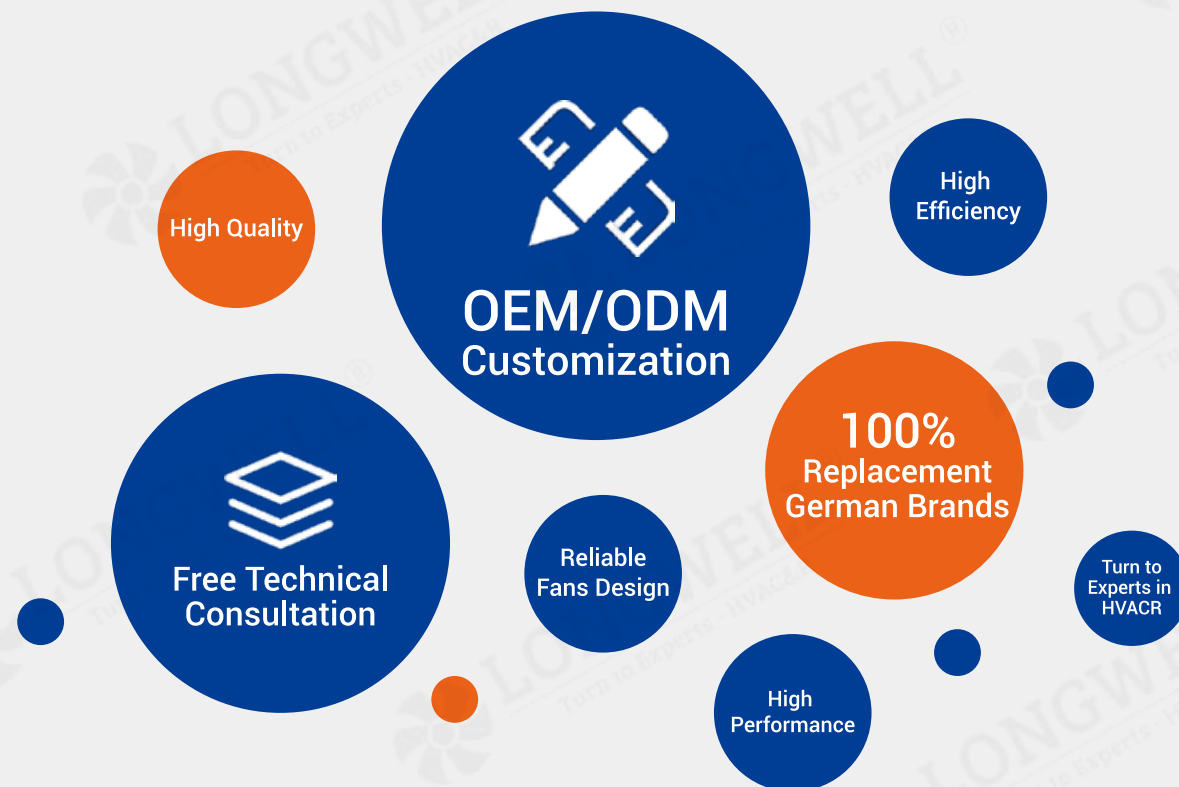

Ningbo Longwell Electric Technology Co., Ltd

Headquarter: NO.100, South of Xuxiang River, Yuyao, Zhejiang Province, China 315400

Tell: +86 574 6218 9863

Fax: +86 574 6218 9863

Phone: +86 180 5854 5395

Web: www.longwellfans.com | www.longwell-group.com | www.longwell-media.com

Email: sales@longwellfans.com



LONGWELL TECHNOLOGY

*"Born for High-Quality Breathing
LONGWELL Fans Power Your Equipments"*



**Professional Manufacturer
of HVACR Fan & Motors**

—— Poultry Ventilation Fans

Longwell Group

Longwell-China

Longwell-USA

Longwell-Russia

Longwell-Europe

CATALOGUE

01-02

About Longwell

03-04

Testing and Standards

05

Type Code

06-12

Fiberglass Fan Series

13-18

Galvanized Box Fan Series

19-23

Circulation Fan Series

24-27

Drum Fan Series

28-36

Poultry Ventilation Fans



About Longwell

Born for High-Quality Breathing, LONGWELL Fans Power Your Equipment

OEM for Well-Known Brands

Supplies Fortune 500 Companies

Global Technical Support

LONGWELL is a leading fan manufacturer, specializing in high-quality fans, blowers, motors, and components for heating, ventilation, air conditioning, and refrigeration applications. We have a strong presence in delivery capabilities, design and R&D capabilities, as well as manufacturing, placing us at the forefront of the industry.

Our product range includes EC/DC/AC centrifugal fans, axial fans, AC/BLDC cross-flow fans, single/double forward curved fans, AC/BLDC/ECM motors, and industrial fan blowers. Since our establishment in 1990, we have continuously upgraded our facilities and production capacity, boasting advanced testing labs and production facilities with an annual capacity of millions of fans. With over 20 years of experience, we are highly skilled in the design, development, and manufacture of fans and motors. We export to over 30 countries and serve numerous Fortune 500 clients.

Our facilities and products are compliant with certifications such as ISO9001, ISO14001, BSCI, CE, UL/ETL, CCC, EMC, and LVD. These certifications demonstrate our compliance in quality management, environmental management, social responsibility, and product safety. We are quality-oriented and dedicated to providing products and services that meet international standards.



Equipped with advanced testing labs and production facilities, including a B&K noise lab, CFD simulation lab, air dynamics test chambers, automatic welding machines, CNC machining centers, and auto robot injection machines, we ensure efficient production and on-time delivery.

As industry leaders, we prioritize technological innovation and efficiency. We employ advanced technologies such as aerodynamics principles and CFD simulation to ensure precise and efficient fan designs. Additionally, we offer customized services to design and manufacture fan systems according to specific customer requirements. Our focus is on providing high-tech, high-efficiency products that meet our customers' needs and contribute to a better future.

At LONGWELL, innovation is at the core of our operations, driving continuous improvement. With our extensive experience and expertise, we can quickly customize solutions that meet customer needs. We emphasize technological sophistication, utilizing advanced technologies and high-performance materials to deliver products that are efficient, safe, and reliable. Our brand is widely recognized globally, and we are committed to promoting sustainable development and advancing the efficient fan industry.

LONGWELL looks forward to collaborating with you and providing high-quality customized fan and motor solutions. Please feel free to contact us as we work together to create a brighter future.




B&K Noise Testing Lab



Production Line



Automatic Welding

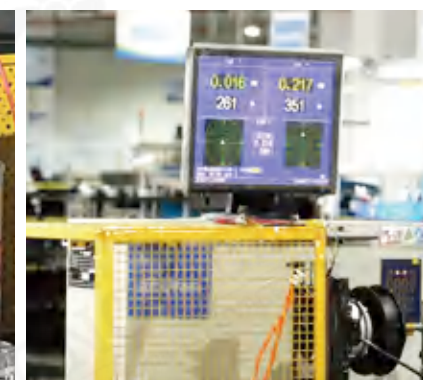

Balance Machine



Automatic Welding Machine



Production Line - Centrifugal Fan



Automatic CNC machine



Air Dynamic Test Lab



Production Line - Axial Fans



Production Line

193

Staff

40000m²

Floor Space

500⁺

Branding Clients

1Million⁺ PCS

Annual Outputs

6

Overseas offices
on spot support

50⁺

Members
R&D Team

Testing and Standards

- ISO GB/T 19001-2016 idt ISO 9001:2015/GB/T 24001-2016 idt ISO 14001:2015/GB/T 45001-2020 idt ISO 45001:2018
- UL 507:2017 Ed.10+R:27/CSA C22.2#113:2018 Ed.11
- BSCI ANSI C63.4:2014/ANSI C63.4a-2017
- EN IEC 55014-1:2021/EN IEC 55014-2:2021/EN IEC 61000-3-2:2019 +A1:2021
EN 61000-3-3:2013 +A1:2019 +A2:2021 +AC:2022-01
EN 60335-2-80:2003 +A1:2004 +A2:2009;
EN 60335-1:2012 +A1:2014 +A13:2017 +A1:2019+A14:2019 +A2:2019+A15:2021
EN 62321-1:2013/EN 62321-2:2014/EN 62321-3-1:2014
EN 62321-4:2014+A1:2017/EN 62321-5:2014/EN 62321-6:2015
EN 62321-7-1:2015/EN 62321-7-2:2017/EN 62321-8:2017



Enterprise Credit Evaluation Certificate - Highest Level in China



Own-Brand



Own-Brand




ETL




ETL



CE

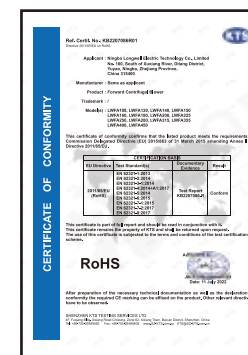


RoHS

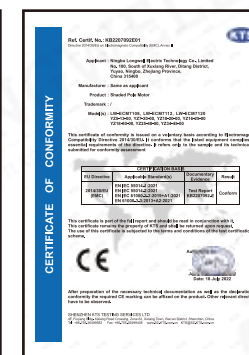


CE



CE

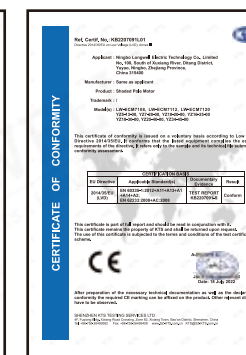


CE

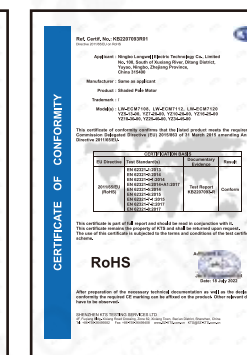

RoHS




ETL

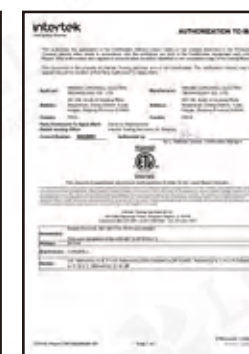


ETL



ETL

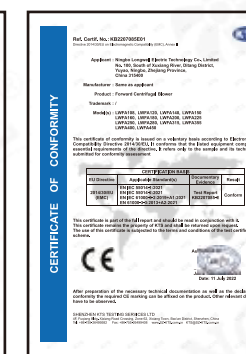

CE

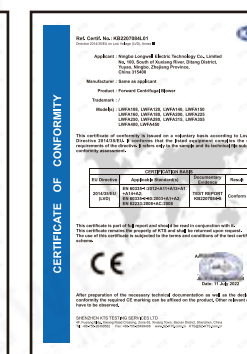


CE




ISO 9001




ISO 9001

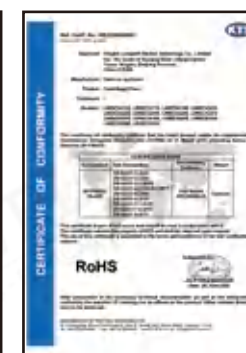


RoHS

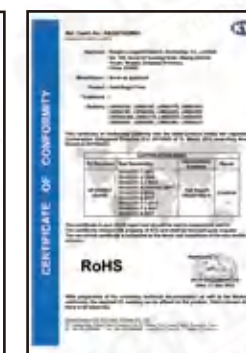


RoHS

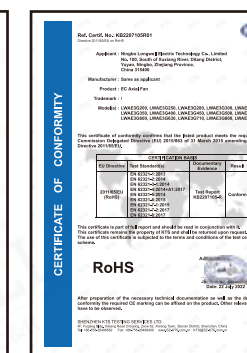

RoHS

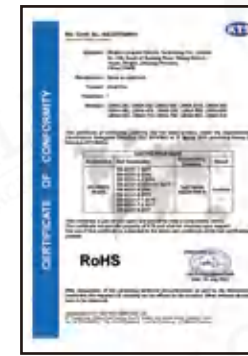

RoHS

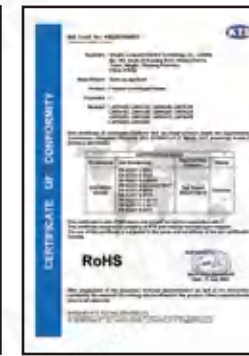


RoHS



CE



CE

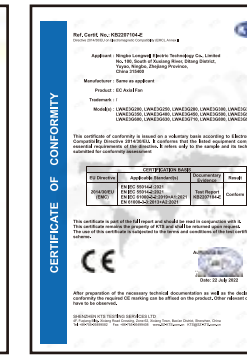

CE

Type Code

LW PV A 455(18") S - 01

Series number

T-380V U-15V S-230V

Diameter of blade/Product specification

A-Fiberglass fan B-Galvanized box fan
C-Circulation fan D-Drum fan
E-Push and pull type fan

PV-Poultry Ventilation

Longwell

Fiberglass Fan Series

Professional HVAC Fan & Motors Manufacturer



Large Air Flow

Being optimized with fluid simulation design, the high-strength die-cast airfoil aluminum propeller provides large air flow to ensure adequate air circulation in the breeding house.

Low Noise

The smooth propeller shape and high dynamic balance accuracy makes tiny friction coefficient between the blade and air combined with small resonance during running, which ensures low noise and improves the living comfort for the animals.

Maintenance Free

Direct driving with high transmission efficiency and simple structure eliminates the trouble of regular belt replacement and reduces the using cost.

High Efficiency

IP55 waterproof and dust-proof protection, F class insulation, ultra-efficient motor with 85% efficiency enables animal producers to save breeding costs and increase profits.

High Corrosion Resistance

The high-strength fiberglass reinforced house, powder-sprayed steel protective mesh, combined with SUS304 stainless steel accessories provide excellent corrosion resistance and durability.


Customer-oriented Option

Fixed speed version or variable frequency version, aluminium shutter or PVC shutter is optional to meet various needs.

LWPVA Series (Frequency conversion version is optional for 18",24"and 36"fan)






18"×24"with five blades

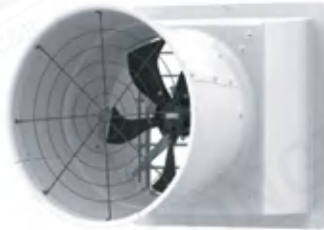

36"×50"with three blades



diversion hood is optional for 18",24"

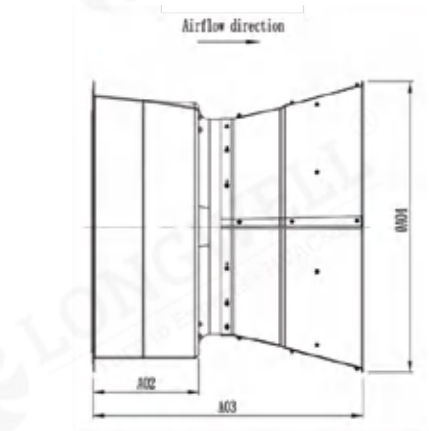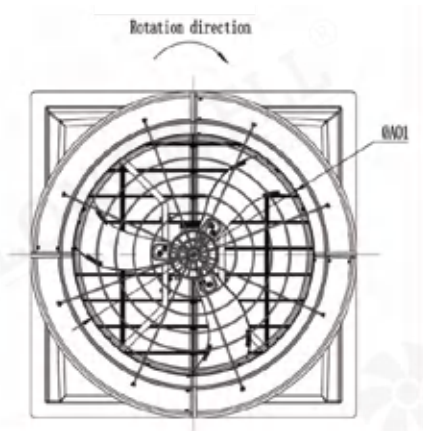

Parameter Table

Model		LWPVA-455(18")T-01	LWPVA-625(24")T-01	LWPVA-915(36")T-01	LWPVA-1270(50")T-01
Motor	Diameter of blade(inch)	18"	24"	36"	50"
	Voltage(V)	380	380	380	380
	Hertz(Hz)	50	50	50	50
	Phase	3	3	3	3
	Power(KW)	0.37	0.37	0.55	1.1
	Current @0Pa(A)	0.85	1.1	1.66	4.25
Performance	Airflow(m³/hr)	0Pa	7400	13600	22100
		-25Pa	6900	12300	19700
		-50Pa	6300	10800	17300
	Efficiency(CMH/Watt)	25.4	29.2	31.2	31
Features	Drive	Direct drive	Direct drive	Direct drive	Direct drive
	Propeller	5-Aluminum	5-Aluminum	3-Aluminum	3-Aluminum
Dimension(mm)	A01	455	625	915	1270
	A02	368	373	463.5	404
	A03	892	987	1182	1313
	A04	630	850	1270	1724
	A05	715.5	903	1269	1555
	A06	715.5	903	1269	1555
	Dimmersion of opening (mm)	615×615	805×805	1150×1150	1440×1440



LWPVA Series

Product Characteristic


- Longwell intelligent variable speed control of EC motor, endows the fan with full protections: such as phase failure, over-voltage, under-voltage, locked-rotor, over-current and temperature protection.
- Electric control aluminum alloy shutter, which can be fully opened in all speed range to ensure large air volume and high efficiency.
- Support centralized operation control of multiple fans (Optional).
- Variable speed can be achieved via 0 ~ 10V / PWM control signal, wide high-efficiency interval to ensure low power consumption.



LWPVA Series

Product Characteristic

- Specially designed for high negative pressure breeding environment with long-term bearing capacity of -200Pa operation. It is an ideal choice to provide ventilation supporting for high-rise multistory breeding buildings.
- Electric rolling shutter is optional to equip to ensure smooth ventilation during operating and air-tightness after the fan is stopped.

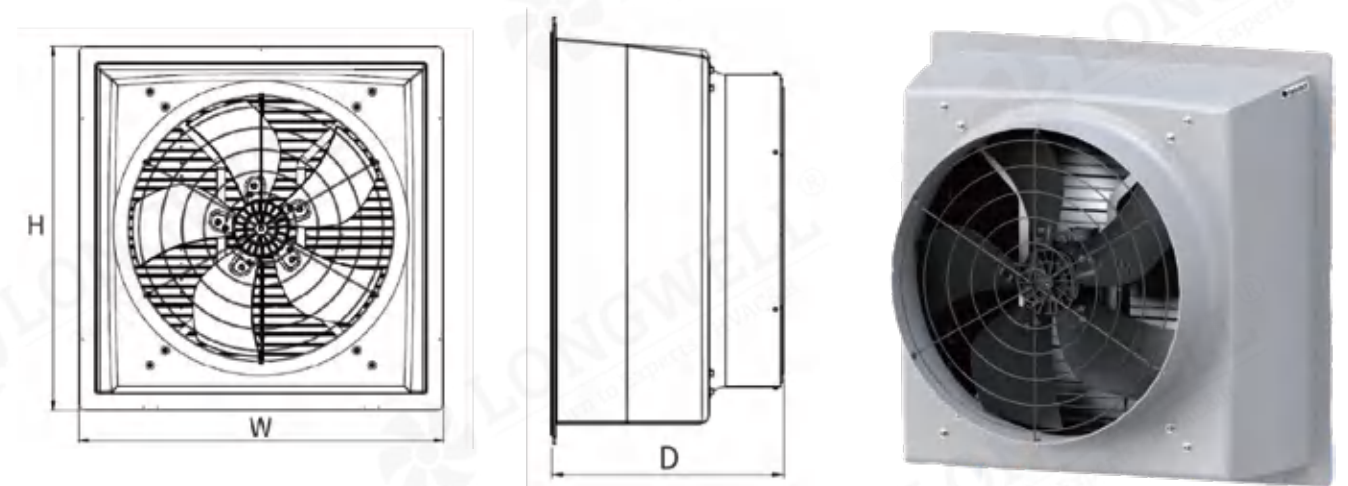

Parameter Table

Model		LWPVA-915(36")S-02	LWPVA-1270(50")T-02
Diameter of blade(inch)		36"	50"
Motor	Voltage(V)	220	380
	Hertz(Hz)	50	50
	Phase	1	3
	Power(KW)	0.55	1.1
	Current @0Pa(A)	5.5	10.5
Performance	Airflow(m³/hr)	0Pa	23580
		-25Pa	21430
		-50Pa	19120
	Efficiency(CMH/Watt)	28.8	32.6
Features	Drive	Direct drive	Direct drive
	Propeller	3-Aluminum	3-Aluminum
Dimension(mm)	A01	915	1270
	A02	463.5	404
	A03	1182	1313
	A04	1270	1724
	A05	1269	1555
	A06	1269	1555
Dimmersion of opening (mm)		1150×1150	1440×1440



Parameter Table

Model		LWPVA-710(28")T-01	LWPVA-800(32")T-01	LWPVA-915(36")T-03
Diameter of blade(inch)		28"	32"	36"
Motor	Voltage(V)	380	380	380
	Hertz(Hz)	50	50	50
	Phase	3	3	3
	Power(KW)	1.1	1.5	2.2
	Current @0Pa(A)	3.5	4.2	6.5
Performance	Airflow(m³/hr)	0Pa	16900	23500
		-100Pa	15000	19600
		-150Pa	13800	16600
		-200Pa	12200	/
Features	Drive	Direct drive	Direct drive	Direct drive
	Propeller	5-Aluminum	5-Aluminum	5-Aluminum
Dimension(mm)	W×D×H	970×560×970	1270×580×1270	1270×580×1270
	Dimmersion of opening(mm)	870×870	1150×1150	1150×1150

LWPVA Series

Product Characteristic


- Adapt to various farm building, especially for the application ranging from -75Pa to -120Pa. It is an ideal choice to provide ventilation supporting for breeding houses equipped with filters or deodorizing systems and high-rise multistory breeding buildings.

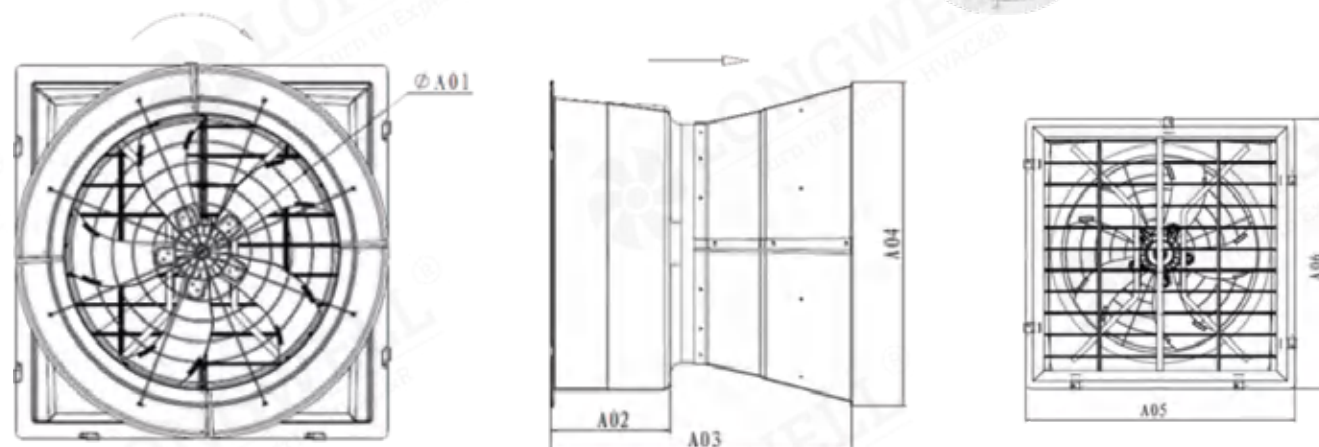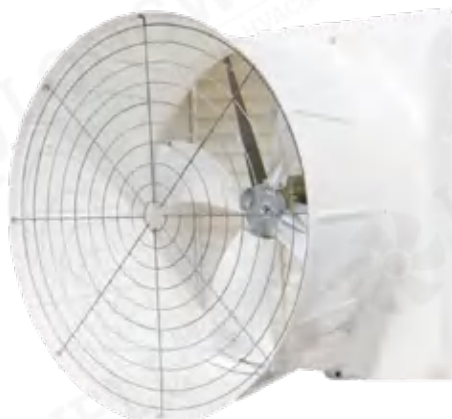

Parameter Table

Model		LWPVA-625(24")T-02	LWPVA-915(36")T-04	LWPVA-1290(51")T-01	LWPVA-1450(57")T-01	
Diameter of blade(inch)		24"	36"	51"	57"	
Motor	Voltage(V)	380	380	380	380	
	HertZ(Hz)	50	50	50	50	
	Phase	3	3	3	3	
	Power(KW)	0.75	0.75	1.8	2.2	
	Current @0Pa(A)	2.2	2.6	4.6	6.7	
Performance	Airflow(m³/hr)	-50Pa	15050	19700	44500	56200
		-75Pa	14060	17700	39500	52000
		-100Pa	12960	15100	34000	45200
Features	Drive	Direct drive	Direct drive	Direct drive	Direct drive	
	Propeller	5-Aluminum	5-Aluminum	4-Aluminum	5-Aluminum	
Dimension(mm)	A01	625	915	1290	1450	
	A02	373	463.5	390	430	
	A03	987	1182	1367	1640	
	A04	850	1270	1595	1860	
	A05	903	1270	1594	1742	
	A06	903	1270	1594	1742	
	Dimmersion of opening (mm)	805×805	1150×1150	1510×1510	1670×1670	

LWPVA Series

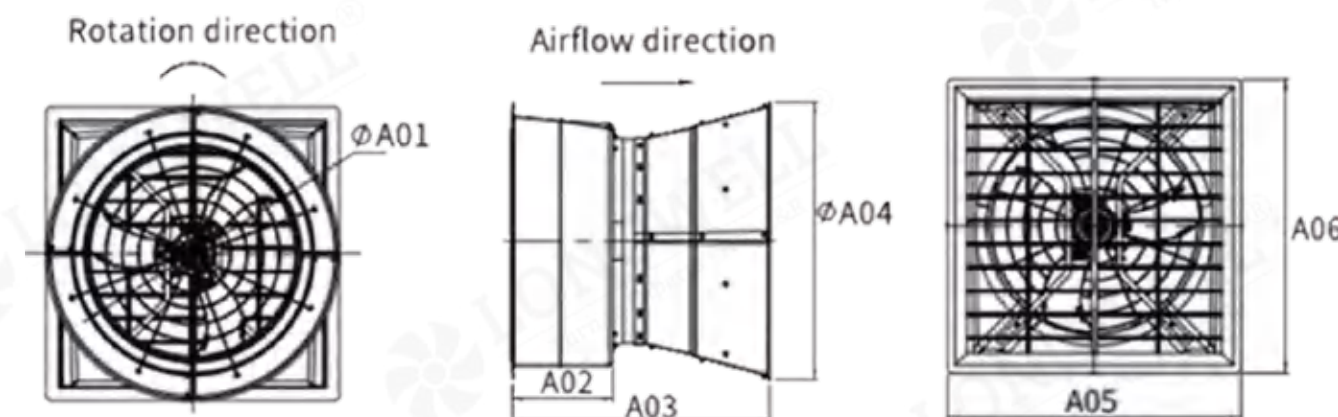

Parameter Table

Model		LWPVA-455(18")T -02	LWPVA-625(24")T-03	LWPVA-915(36")T-05	LWPVA-1270(50")T-03	
Diameter of blade(inch)		18"	24"	36"	50"	
Motor	Voltage(V)	380	380	380	380	
	Hertz(Hz)	50	50	50	50	
	Phase	3	3	3	3	
	Power(KW)	0.25	0.37	0.55	1.1	
	Current @0Pa(A)	0.8	1.14	1.7	4.1	
Performance	Airflow(m³/hr)	0Pa	6960	12500	21400	45000
		-25Pa	6390	11440	19200	40000
		-50Pa	5710	9920	16700	34000
	Efficiency(CMH/Watt)	23.4	24.4	27.3	29.3	
Features	Drive	Direct drive	Direct drive	Direct drive	Direct drive	
	Propeller	5-Aluminum	5-Aluminum	3-Aluminum	3-Aluminum	
Dimension(mm)	A01	455	625	915	1270	
	A02	368	373	463.5	404	
	A03	892	987	1182	1313	
	A04	630	850	1270	1724	
	A05	715.5	903	1269	1555	
	A06	715.5	903	1269	1555	
Dimmersion of opening (mm)		615×615	805×805	1150×1150	1440×1440	

Galvanized Box Fan Series

Professional HVAC Fan & Motors Manufacturer



Large Air Flow

High-strength stainless steel propeller with advanced fluid design that provides large air flow low noise, and high efficiency.

High Efficiency

IP55 waterproof and dust-proof protection, F class insulation, ultra-efficient motor with 85% efficiency enables animal producers to save breeding costs and increase profits..

High Strength

Box housing and venturi nozzle are made of "X" gauge galvanized sheet-steel with 275g/m² zinc layer coating, which enables to withstand the harsh environment of the breeding sites.

Long Durability

Belt drive, adopt imported famous brand belt, made of neoprene•composite materials and fiberglass cord core, that provides high strength, good wear resistance, high flexibility and high tensile resistance.

Excellent Air-tightness

The shutter is automatically open and close by a centrifugal push-pull device, which ensures air tightness and prevents light transmittance.

Wide Application

An ideal choice for ventilation and cooling in animal breeding houses, greenhouses, various warehouses, workshops and more.




LWPVB Series



Parameter Table

Model		LWPVB-915(36")T(S)-01	LWPVB-1270(50")T(S)-01	
Diameter of blade(inch)		36"	50"	
Motor	Voltage(V)	380/230	380/230	
	HertZ(Hz)	50/60	50/60	
	Phase	3	3	
	Power(KW)	0.55	1.1	
	Current @0Pa(A)	1.7	3	
Performance	Airflow(m³/hr)	0Pa	19100	40000
		-25Pa	16400	36000
		-50Pa	13300	30700
	Efficiency(CMH/Watt)	23.3	25	
	Features	Drive	Direct drive	Direct drive
Propeller		6-Aluminum	6-Aluminum	
Dimension(mm)	A01	915	1270	
	A02	1000	1380	
	A03	1000	1380	
	A04	450	450	
	A05	500	500	
	Dimmersion of opening (mm)	1020×1020	1440×1440	


LWPVB Series

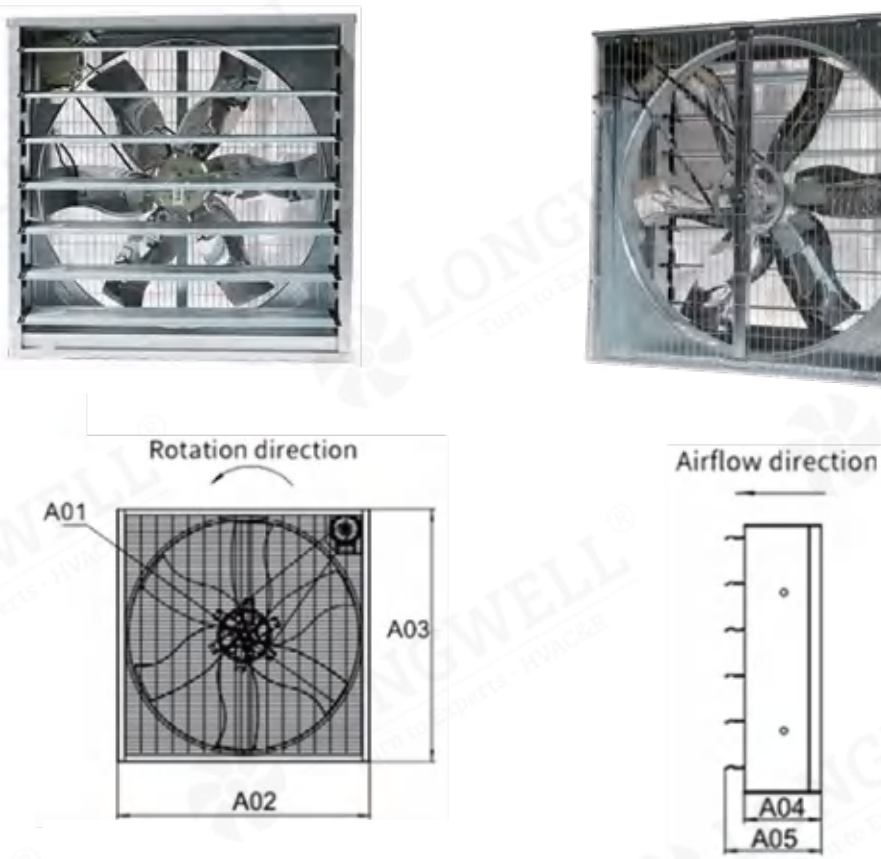

Parameter Table

Model			LWPVB-915(36")T(S)-02	LWPVB-1270(50")T(S)-02
Diameter of blade(inch)			36"	50"
Motor	Voltage(V)		380/230	380/230
	HertZ(Hz)		50/60	50/60
	Phase		3	3
	Power(KW)		0.55	1.1
	Current @0Pa(A)		1.7	3
Performance	Airflow(m³/hr)	0Pa	18400	38700
		-25Pa	16080	35500
		-50Pa	12750	30500
	Efficiency(CMH/Watt)		23.3	21.8
	Features	Drive		Direct drive
Propeller		6-Aluminum	6-Aluminum	
Dimension(mm)	A01		915	1270
	A02		1000	1380
	A03		1000	1380
	A04		450	450
	A05		500	500
	Dimmersion of opening (mm)		1020×1020	1440×1440


LWPVB Series

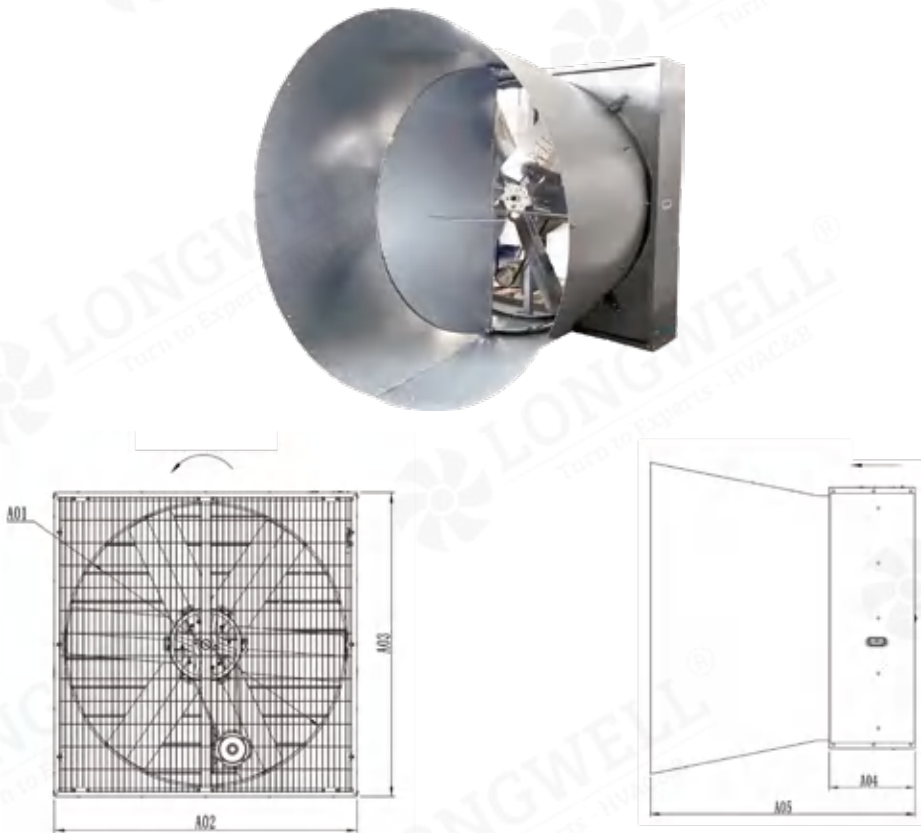

Parameter Table

Model		LWPVB-915(36")T-03	LWPVB-1270(50")T-03	
Diameter of blade(inch)		36"	50"	
Motor	Voltage(V)	380	380	
	HertZ(Hz)	50	50	
	Phase	3	3	
	Power(KW)	0.55	1.1	
	Current @0Pa(A)	1.5	3.2	
Performance	Airflow(m³/hr)	0Pa	20483	44084
		-25Pa	17616	40125
		-50Pa	14570	34561
	Efficiency(CMH/Watt)	26.3	26.5	
Features	Drive	Direct drive	Direct drive	
	Propeller	6-Aluminum	6-Aluminum	
Dimension(mm)	A01	915	1270	
	A02	1000	1380	
	A03	1000	1380	
	A04	300	300	
	A05	1180	1300	
	Dimmersion of opening (mm)	1020×1020	1440×1440	

LWPVB Series

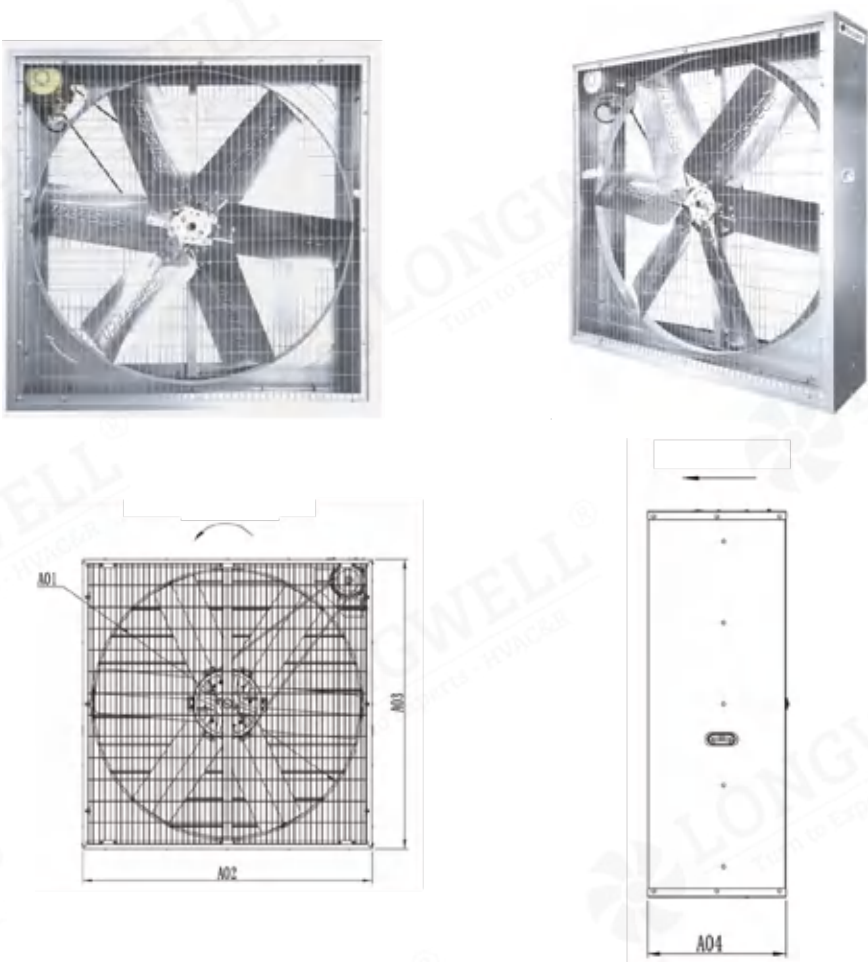

Parameter Table

Model		LWPVB-915(36")T-04	LWPVB-1270(50")T-04
Diameter of blade(inch)		36"	50"
Motor	Voltage(V)	380	380
	Hertz(Hz)	50	50
	Phase	3	3
	Power(KW)	0.55	1.1
	Current @0Pa(A)	1.5	3.2
Performance	Airflow(m³/hr)	20000	42000
Features	Drive	Direct drive	Direct drive
	Propeller	6-Aluminum	6-Aluminum
Dimension(mm)	A01	915	1270
	A02	1000	1380
	A03	1000	1380
	A04	330	330

Circulation Fan Series

Professional HVAC Fan & Motors Manufacturer



Fast cooling

Being optimized with fluid simulation design, high-strength aluminum alloy propeller provides large air flow with few air volume loss on both sides, which enables fast cooling and quickly air quality improving in cowsheds.

Wide airflow

Long air blow distance and wide air supply area can be simply achieved by adjusting the airfoil deflectors instead of changing the original position of the fan.

Easy to maintain

An automatic belt tensioner is adopted to extend debugging period; and the belt change is easily done without removing the propeller.

Power saving

The use of ultra-efficient motor achieves high energy efficiency ratio to reduce power consumption and costs.

Anti-corrosion


Corrosion resistance high-density fiberglass housing, with high strength and light weight.

Animal comfort


Silently supply gentle wind at low operation speed to comfort the animals.

Application

Widely used in cowsheds and stables for air circulation, cooling, and livestock beds drying; an atomizer can be fitted with to achieve the effects of humidification and suppression of dust.

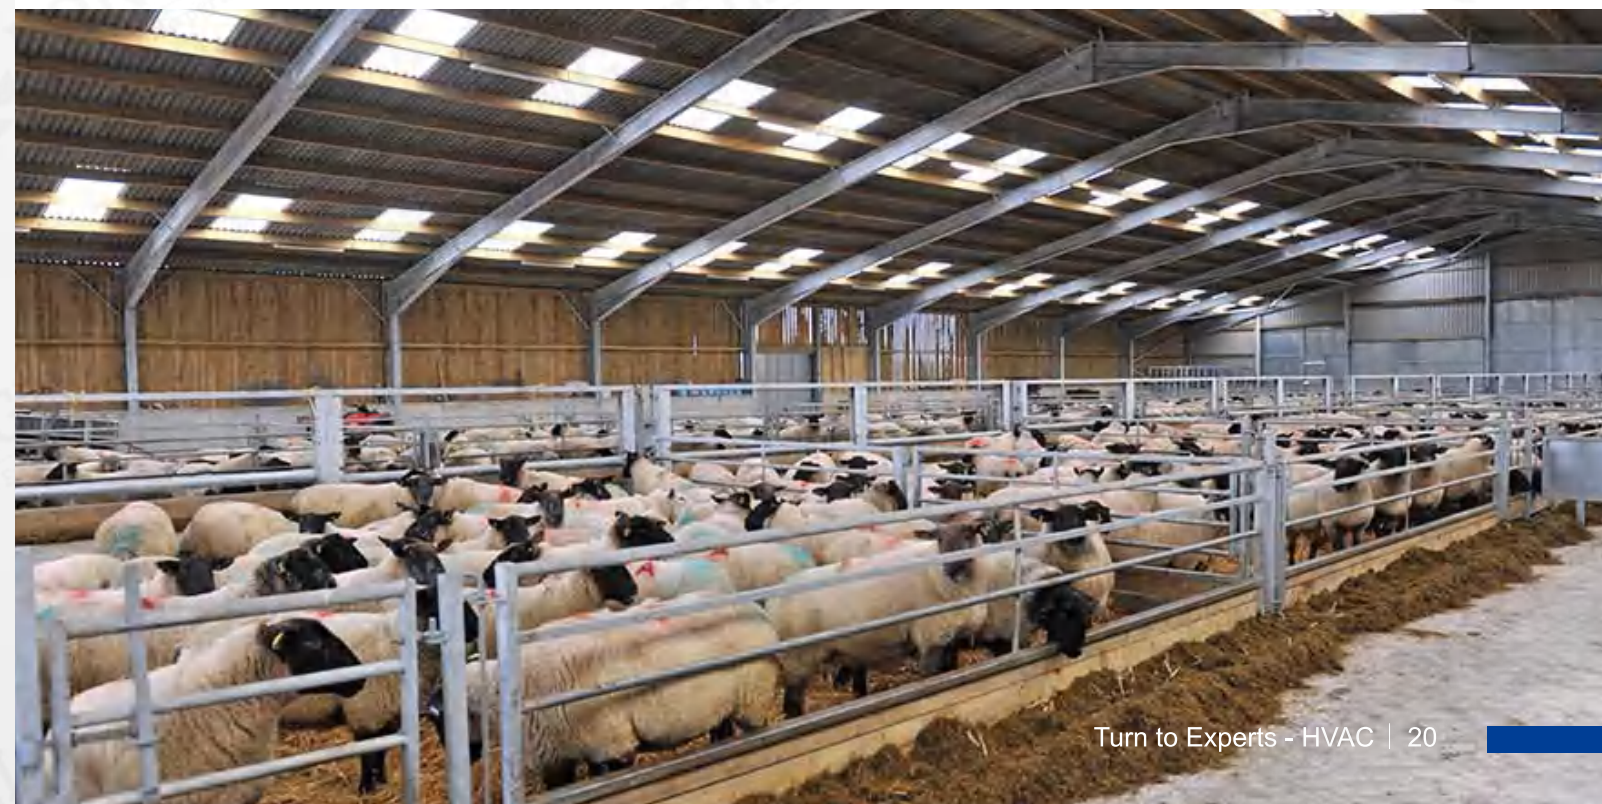

LWPVC Series

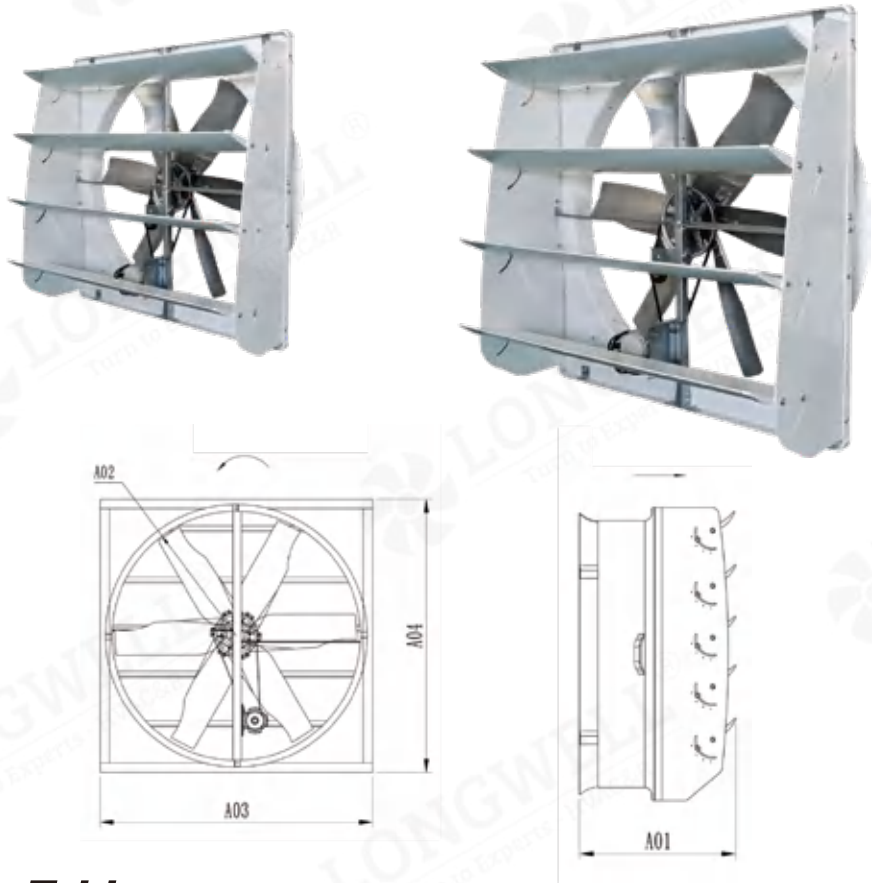

Parameter Table

Model		LWPVC-1400(55")T(S)-01	LWPVC-1830(72")T(S)-01
Diameter of blade(inch)		55"	72"
Motor	Voltage(V)	380/230	380/230
	Hertz(Hz)	50/60	50/60
	Phase	3	3
	Power(KW)	1.1	2.2
	Current @0Pa(A)	3.1	4.6
Performance	Airflow(m³/hr)	45000	85200
	Airflow(CFM)	26500	50180
	Efficiency(m³/hr)/W	36	39.6
	Efficiency(cfm/Watt)	21.2	23.3
Features	Drive	Belt driven	Belt driven
	Belt	Mitsuboshi with automatic tensioner	Mitsuboshi with automatic tensioner
	Propeller	6-Aluminum	6-Aluminum
	Deflector	4	5
Dimension(mm)	A01	740	1100
	A02	1400	1830
	A03	1600	2050
	A04	1600	2050

Fast cooling

Being optimized with fluid simulation design, high-strength die-cast aluminum airfoil propeller provides large air flow, which enables fast cooling and quickly air quality improving in cowsheds.

Low Noise

The smooth propeller shape and high dynamic balance accuracy makes tiny friction coefficient between the blade and air combined with small resonance during running, which ensures low noise and improves the living comfort for the animals.

Maintenance Free

Direct driving with high transmission efficiency and simple structure, which eliminates the trouble of regular belt replacement and reduces the using cost.

Power saving


The use of ultra-efficient motor achieves high energy efficiency ratio to reduce power consumption and costs.

Anti-corrosion

The powder-sprayed steel body and protective mesh, combined with SUS304 stainless steel accessories provide excellent corrosion resistance.

High durability

2.0mm thickness steel fan body with epoxy resin coating, sturdy and durable.

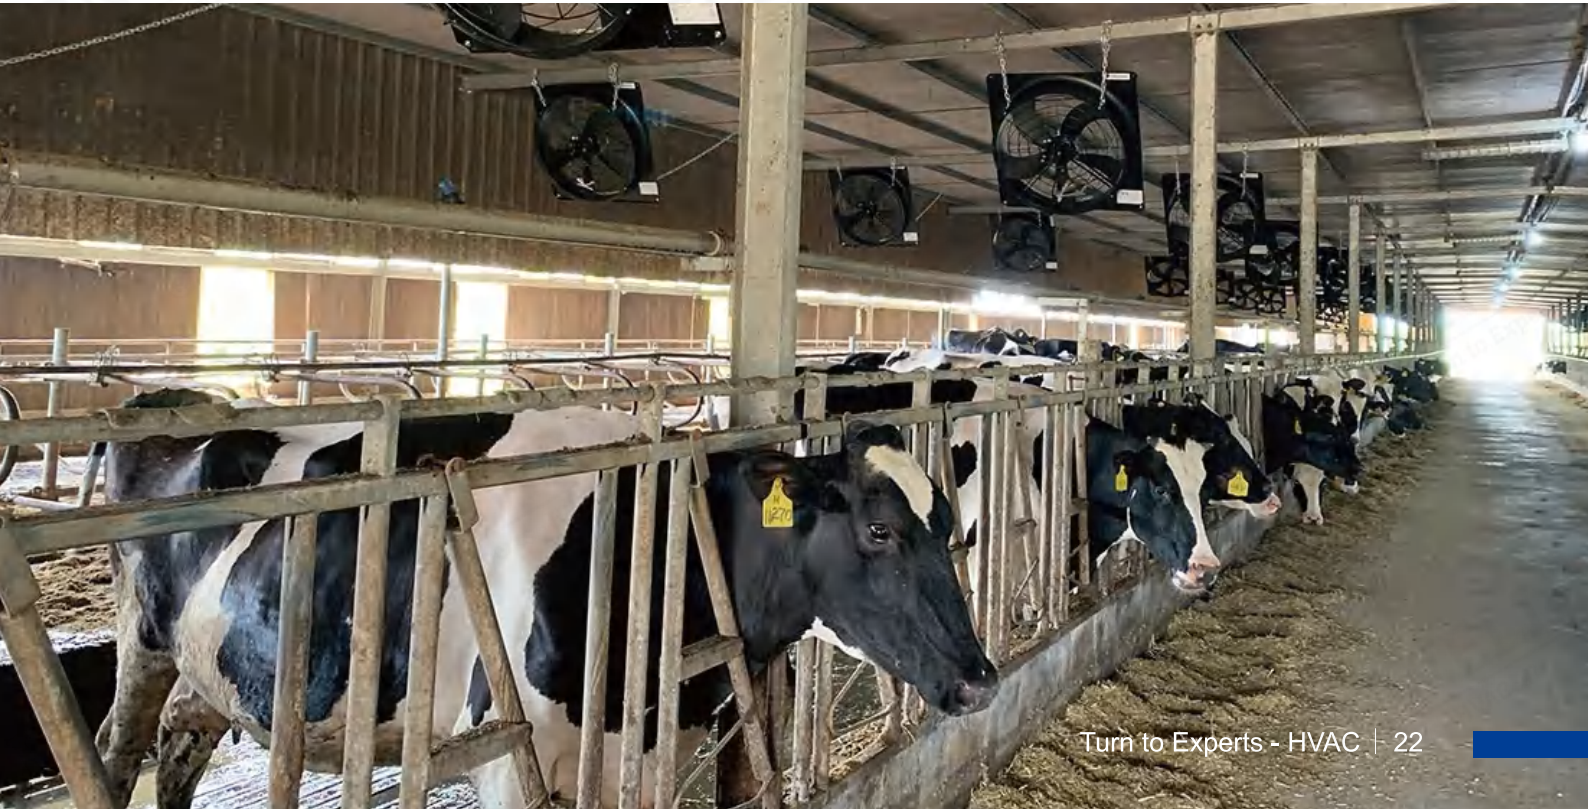

LWPVC Series



Parameter Table

Model		LWPVC-915(36")T-01	LWPVC-915(36")T-02
Diameter of blade(inch)		36"	36"
Motor	Voltage(V)	380	380
	Hertz(Hz)	50	50
	Phase	3	3
	Power(KW)	0.75	0.37
	Speed(rpm)	930	730
Performance	Airflow(m³/hr)	24500	16500
	Airflow(CFM)	14430	9720
	Efficiency(m³/hr)/W	25.8	33
	Efficiency(cfm/Watt)	15.2	19.4
Features	Drive	Direct drive	Direct drive
	Propeller	5-Aluminum	3-Aluminum
Dimension(mm)	W×D×H	1070×380×1070	1070×380×1070

Drum Fan Series

Professional HVAC Fan &Motors Manufacturer



Large airflow

Being optimized with fluid simulation design, excellent performance and large air flow to ensure adequate air circulation

Low noise

High-strength nylon propeller with anti-deformation, smooth blade shape and low operating load, which ensures low noise and help to improve the comfort of animals' living environment

Maintenance-free

Direct driving with high transmission efficiency and simple structure eliminates the trouble of regular belt replacement and reduces the using cost

Ultra-efficient motor

IP55 waterproof and dust-proof protection, F class insulation, ultra-efficient motor with 85% efficiency enables animal producers to save breeding costs and increase profits


Anti-corrosion

High molecular polymer fiberglass reinforced shell with light weight, anti-corrosion and good strength

Long service life

Powder-spayed metal bracket provides good structural strength, terrific anti-rust ability and long service life.

LWPVD Series


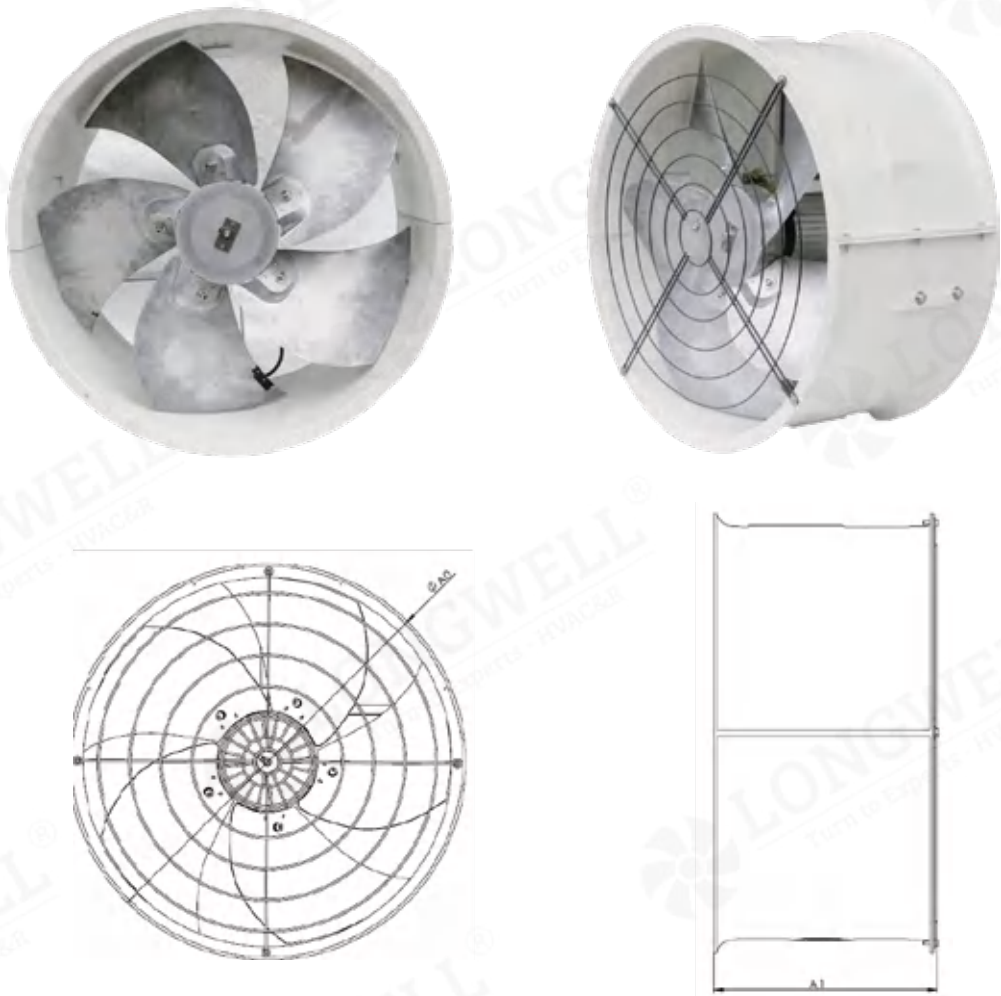


Parameter Table

Model		LWPVD-350(14")S-01	LWPVD-455(18")S-01	LWPVD-500(20")S-01	LWPVD-710(28")S-01	
Diameter of blade(inch)		14"	18"	20"	28"	
Motor	Voltage(V)	220	220	220	380	
	HertZ(Hz)	50	50	50	50	
	Phase	3	3	3	3	
	Power(KW)	0.12	0.18	0.37	0.75	
	Current @0Pa(A)	0.5	1	1.6	2.5	
Performance	Airflow(m³/hr)	0Pa	2800	4700	7050	16380
		50Pa	2000	4000	6000	15000
		100Pa	/	2840	4830	13080
Features	Drive	Direct drive	Direct drive	Direct drive	Direct drive	
	Propeller	5-Aluminum	5-Aluminum	5-Aluminum	5-Aluminum	
Dimension(mm)	A01	400	500	550	760	
	A02	300	350	350	400	



LWPVD Series

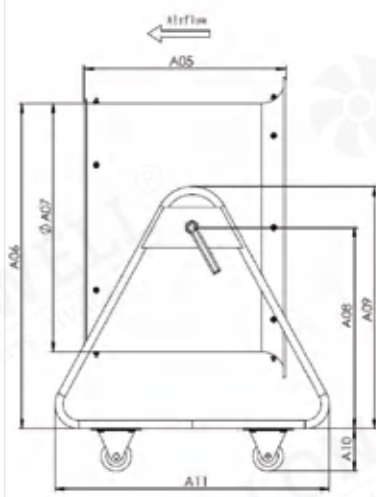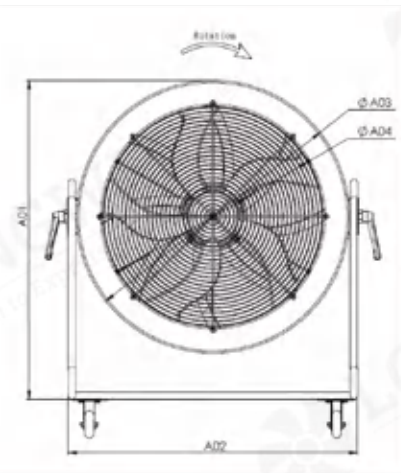

Parameter Table

Model		LWPVD-625(24")T(S)-01						
Diameter of blade(inch)		24"						
Motor	Voltage(V)	3~380/3~200						
	Hertz(Hz)	50/60						
	Phase	4						
	Power(KW)	1.5						
	Current @0Pa(A)	6						
Performance	Airflow(m³/hr)	18000						
	Airflow(CFM)	10590						
Features	Drive	Direct drive						
	Propeller	7-Aluminum						
	Bearing	NSK bearing						
Dimension(mm)	A01	A02	A03	A04	870	790	744	600
	A05	A06	A07	A08	500	806	616	498
	A09	A10	A11		600	106	680	

Poultry Ventilation Fans

Professional HVAC Fan &Motors Manufacturer



Push And Pull Type Fan (Push-pull type)

Model	Height (mm)	Width (mm)	Thickness (mm)
LWPVE-800T -01	800	800	450
LWPVE-1000T -01	1000	1000	450
LWPVE-1100T -01	1100	1100	450
LWPVE-1380T -01	1380	1380	450
LWPVE-1530T -01	1530	1530	450



Product Characteristic

High Class Fan is composed of a blade, motor, outer frame protecting nets and supporting frames and shutters. The shutters are opened by the Push-pull Centrifugal system. The major parts are made of galvanized steel sheets (180g/275g/m2 zinc coating)and stainless steel sheets. Based on sound aerodynamic principles, wind resistance is minimized and efficient airflow is achieved. All products are used in a wide range of settings, including various types of farms, greenhouses and factory buildings.



Technical Specifications

Model	Diameter of blades(mm)	Blades speed(RPM)	Motor speed(RPM)	Air flow (m³/h)	Total pressure (Pa)	Noise [dB(A)]	Input power(W)	Rated voltage(V)
LWPVE-800T -01	710(28")	650	1400	18000	60	≤70	370	380
LWPVE-1000T -01	910(36")	650	1400	26000	60	≤70	550	380
LWPVE-1100T -01	1000(40")	600	1400	33000	70	≤70	750	380
LWPVE-1380T -01	1270(50")	440	1400	43500	56	≤70	1100	380
LWPVE-1530T -01	1400(55")	420	1400	51000	56	≤75	1500	380

Push And Pull Type Fan (Hammer type)

Product Characteristic

Fans mainly consists of blade, motor, frame, protect net, bracing cage, shutters. The motor drives blade to cause air flow and louver window can open and close automatically to keep the dust from entering.

Mainly Applications



Model	Height (mm)	Width (mm)	Thickness (mm)
LWPVE-600(24")T -01	600	600	370
LWPVE-800(29")T -02	800	800	400
LWPVE-900(30")T -01	900	900	400
LWPVE-1000(36")T -01	1000	1000	400
LWPVE-1100(40")T -02	1100	1100	400
LWPVE-1220(44")T -01	1220	1220	400
LWPVE-1380(50")T -01	1380	1380	400
LWPVE-1530(56")T -02	1530	1530	400

Technical Specifications

Model	Diameter of blades(mm)	Blades speed(RPM)	Motor speed(RPM)	Air flow (m³/h)	Total pressure (Pa)	Noise [dB(A)]	Input power(W)	Rated voltage(V)
LWPVE-600(24")T -01	500	680	1400	6500	60	≤60	370	380
LWPVE-800(29")T -02	710	660	1400	22000	60	≤60	370	380
LWPVE-900(30")T -01	750	630	1400	28000	65	≤65	550	380
LWPVE-1000(36")T -01	900	610	1400	30000	70	≤70	550	380
LWPVE-1100(40")T -02	1000	600	1400	32500	70	≤70	750	380
LWPVE-1220(44")T -01	1100	460	1400	38000	73	≤70	1100	380
LWPVE-1380(50")T -01	1250	439	1400	44000	56	≤70	1100	380
LWPVE-1530(56")T -02	1400	325	1400	55800	60	≤70	1500	380

Frp Aluminum Blade Fan

Product Characteristic

- This fiberglass fan is suitable for pig and poultry farms with corrosive gases.
- The fiberglass shell is extremely strong, corrosion-resistant, non-deformable, and non-fading.
- The horn-shaped exhaust port is highly resistant to impact, increasing performance by 10%.
- The aluminum blade is designed with a serrated edge to effectively reduce noise and improving efficiency.
- High-quality imported bearings ensure smooth and efficient operation of the blades.
- It features a car-type belt tensioner that can be lubricated, and a high-quality and efficient motor (optional).



Cast aluminum blades



PA66+GF Blades



Belt-Driven system



Direct-Driven System



High efficiency Motor

Frp Cone Fan

Product Characteristic

Fiberglass fan is widely used in corrosive gas place like piggery farm, poultry farm

Specification:

- UV resistant fiberglass housing
- Fiberglass cone standard on all fans, can improve 10% efficiency
- Aluminum blade with sawtooth design, reduce the noise
- High quality imported pillow block bearings
- Automotive style belt tensioner
- Higher quality motor will be available



Belt-Driven system



Fan shutter



Direct-Driven System

Model	Voltage frequency/phase	Complete size LXHXW(mm)	Size with cone LXHXW(mm)
LWPVA-1460T(S) -01	380V/220V 50Hz/60Hz 3/1	1460×1460×500	1460×1460×1270
LWPVA-1260T(S) -01		1260×1260×560	1260×1260×1200
LWPVA-1060T(S) -01		1060×1060×560	1060×1060×1160
LWPVA-850T(S) -01		850~850~450	850×850×950
LWPVA-660T(S) -01		660×660×450	
LWPVA-560T(S) -01		560×560×450	

Technical Specifications

Model	Propeller Dia. [Mm/(Inch)]	Blades QTY	Propeller material	Rated speed(R/min)	Air capacity [m³/h/(CFM)]	Rated power (KW/HP)	Noise [dB(A)]
LWPVA-1460T(S) -01	1250/(50")	6	Fiberglass	520	44000(26000)	1.1/1.5	60-70
LWPVA-1260T(S) -01	1080/(43")	6	Fiberglass	520	40000(23500)	0.75/1	60-70
LWPVA-1060T(S) -01	880/(36")	6	Fiberglass	520	28000(16600)	0.55/0.75	60-70
LWPVA-850T(S) -01	660/(25")	6	Fiberglass	700	13000(7700)	0.37/0.5	60-70
LWPVA-660T(S) -01	480/(19")	6	Fiberglass	950	10000(4100)	0.37/0.5	60-70
LWPVA-560T(S) -01	380/(15")	6	Fiberglass	950	8000(3000)	0.37/0.5	60-70

High Strength Wet Curtain

Product Characteristic

Corrugated paper special treatment, high structural strength, corrosion resistance, long service cycle; With excellent permeation and water absorption, which can ensure that water evenly through the whole wet curtain wall; The specific three-dimensional space structure provides the maximum evaporation surface area for the heat exchange between water and air Aluminum alloy & Galvanized Metal Frame optional.



Wet Curtain Frame



Galvanized Metal Frame




Stainless steel Frame



Cast aluminum Frame

Wet Curtain Specifications & Size

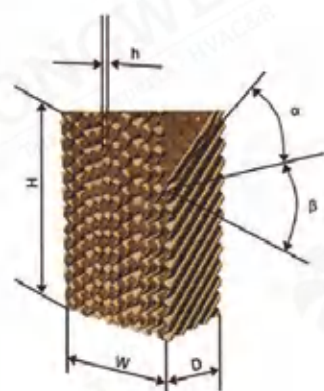

Model	7090	7060
H(mm)	1500.1800.2000	1500.1800.2000
W(mm)	900.600.300	900.600
D(mm)	100.150.200.300	100.150.200.300
h(mm)	7	5
α(*)	45	45
β(*)	45	45




H:Height W:Width
D:Thickness h:Flute high
α:Across angle (1)
β: Across angle (2)


High Strength Wet Curtain

Product Characteristic

The wet curtain has a thin layer of water film on the surface of its corrugated fiber paper. When the hot and dry outdoor air is drawn through the paper pad by the fan, the water on the water film absorbs the heat in the air and evaporates into water vapor. In this way, the processed cool and moist air enters the indoor environment. This natural process is similar to the wind blowing over the water surface. The principle of cooling by wet curtain utilizes the effective combination of the fan and the wet curtain to artificially reproduce the physical phenomenon of water evaporation and cooling in nature, achieving the purpose of cooling.

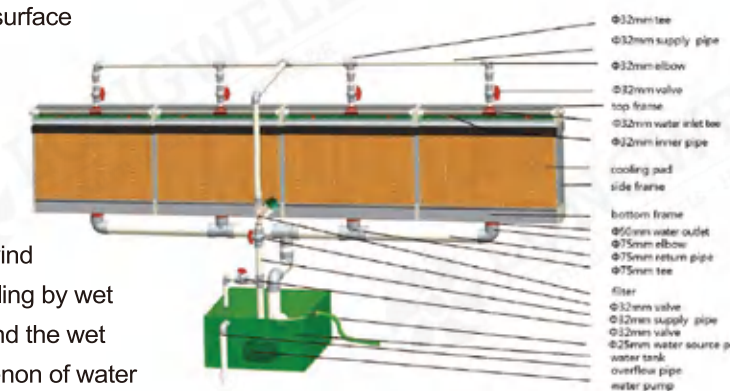

Fan, Wet Curtain Ventilation Cooling Diagram

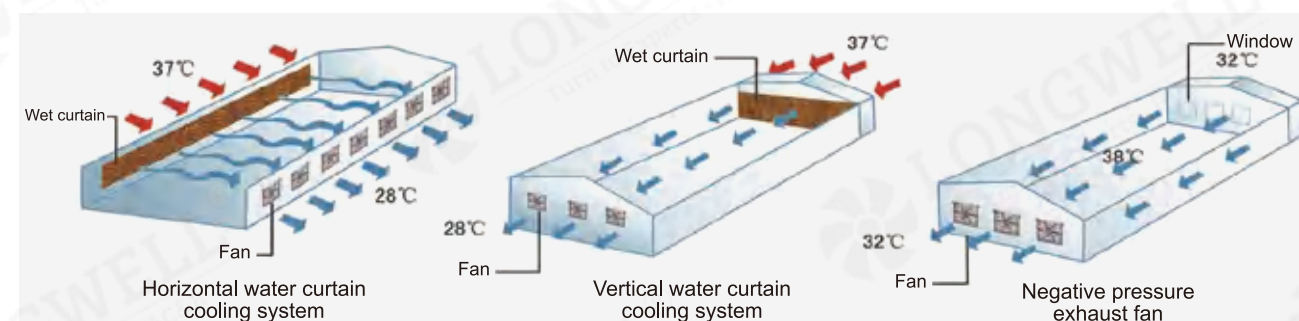

Mainly Applications



The Wind Window Side Wall

Product Characteristic

Seal tight, side open installation, length can be customized. Adopt polyb, ABS, new material, three kinds of materials, can be made to order.



Air Inlet

Product Characteristic

Negative pressure automatic open window, open and close sensitive and convenient, automatic maintenance of indoor and outdoor pressure difference, and can make the outside light become soft, plate adopts domestic famous brand, good light transmittance and not easy to deformation; Rotating shaft adopts solid stainless steel aperture, opening and closing is stable and reliable; Pulling and opening parts can be added to control opening and closing by winch; Black counterweight block surface after 6 times of treatment, anti-corrosion, anti-rust; OEM Size available.



Ceiling Ventilation Window

Product Characteristic

ABS engineering plastic and PVC plastic material processing and become, have double insulation effect, is the best choice of ventilation suction a top, corrosion resistance, anti-aging, deformation, tightly closed and open easily, length can be customized.



Poultry Light Filter

Product Characteristic

It is refined by injection molding and non glare PVC material. Durable resistance to sunlight, chemical resistance, high pressure cleaning; Reasonable design, can assemble different size, easy installation, efficient reduction of light; The outer frame is made of stainless steel frame and galvanized outer frame;

