


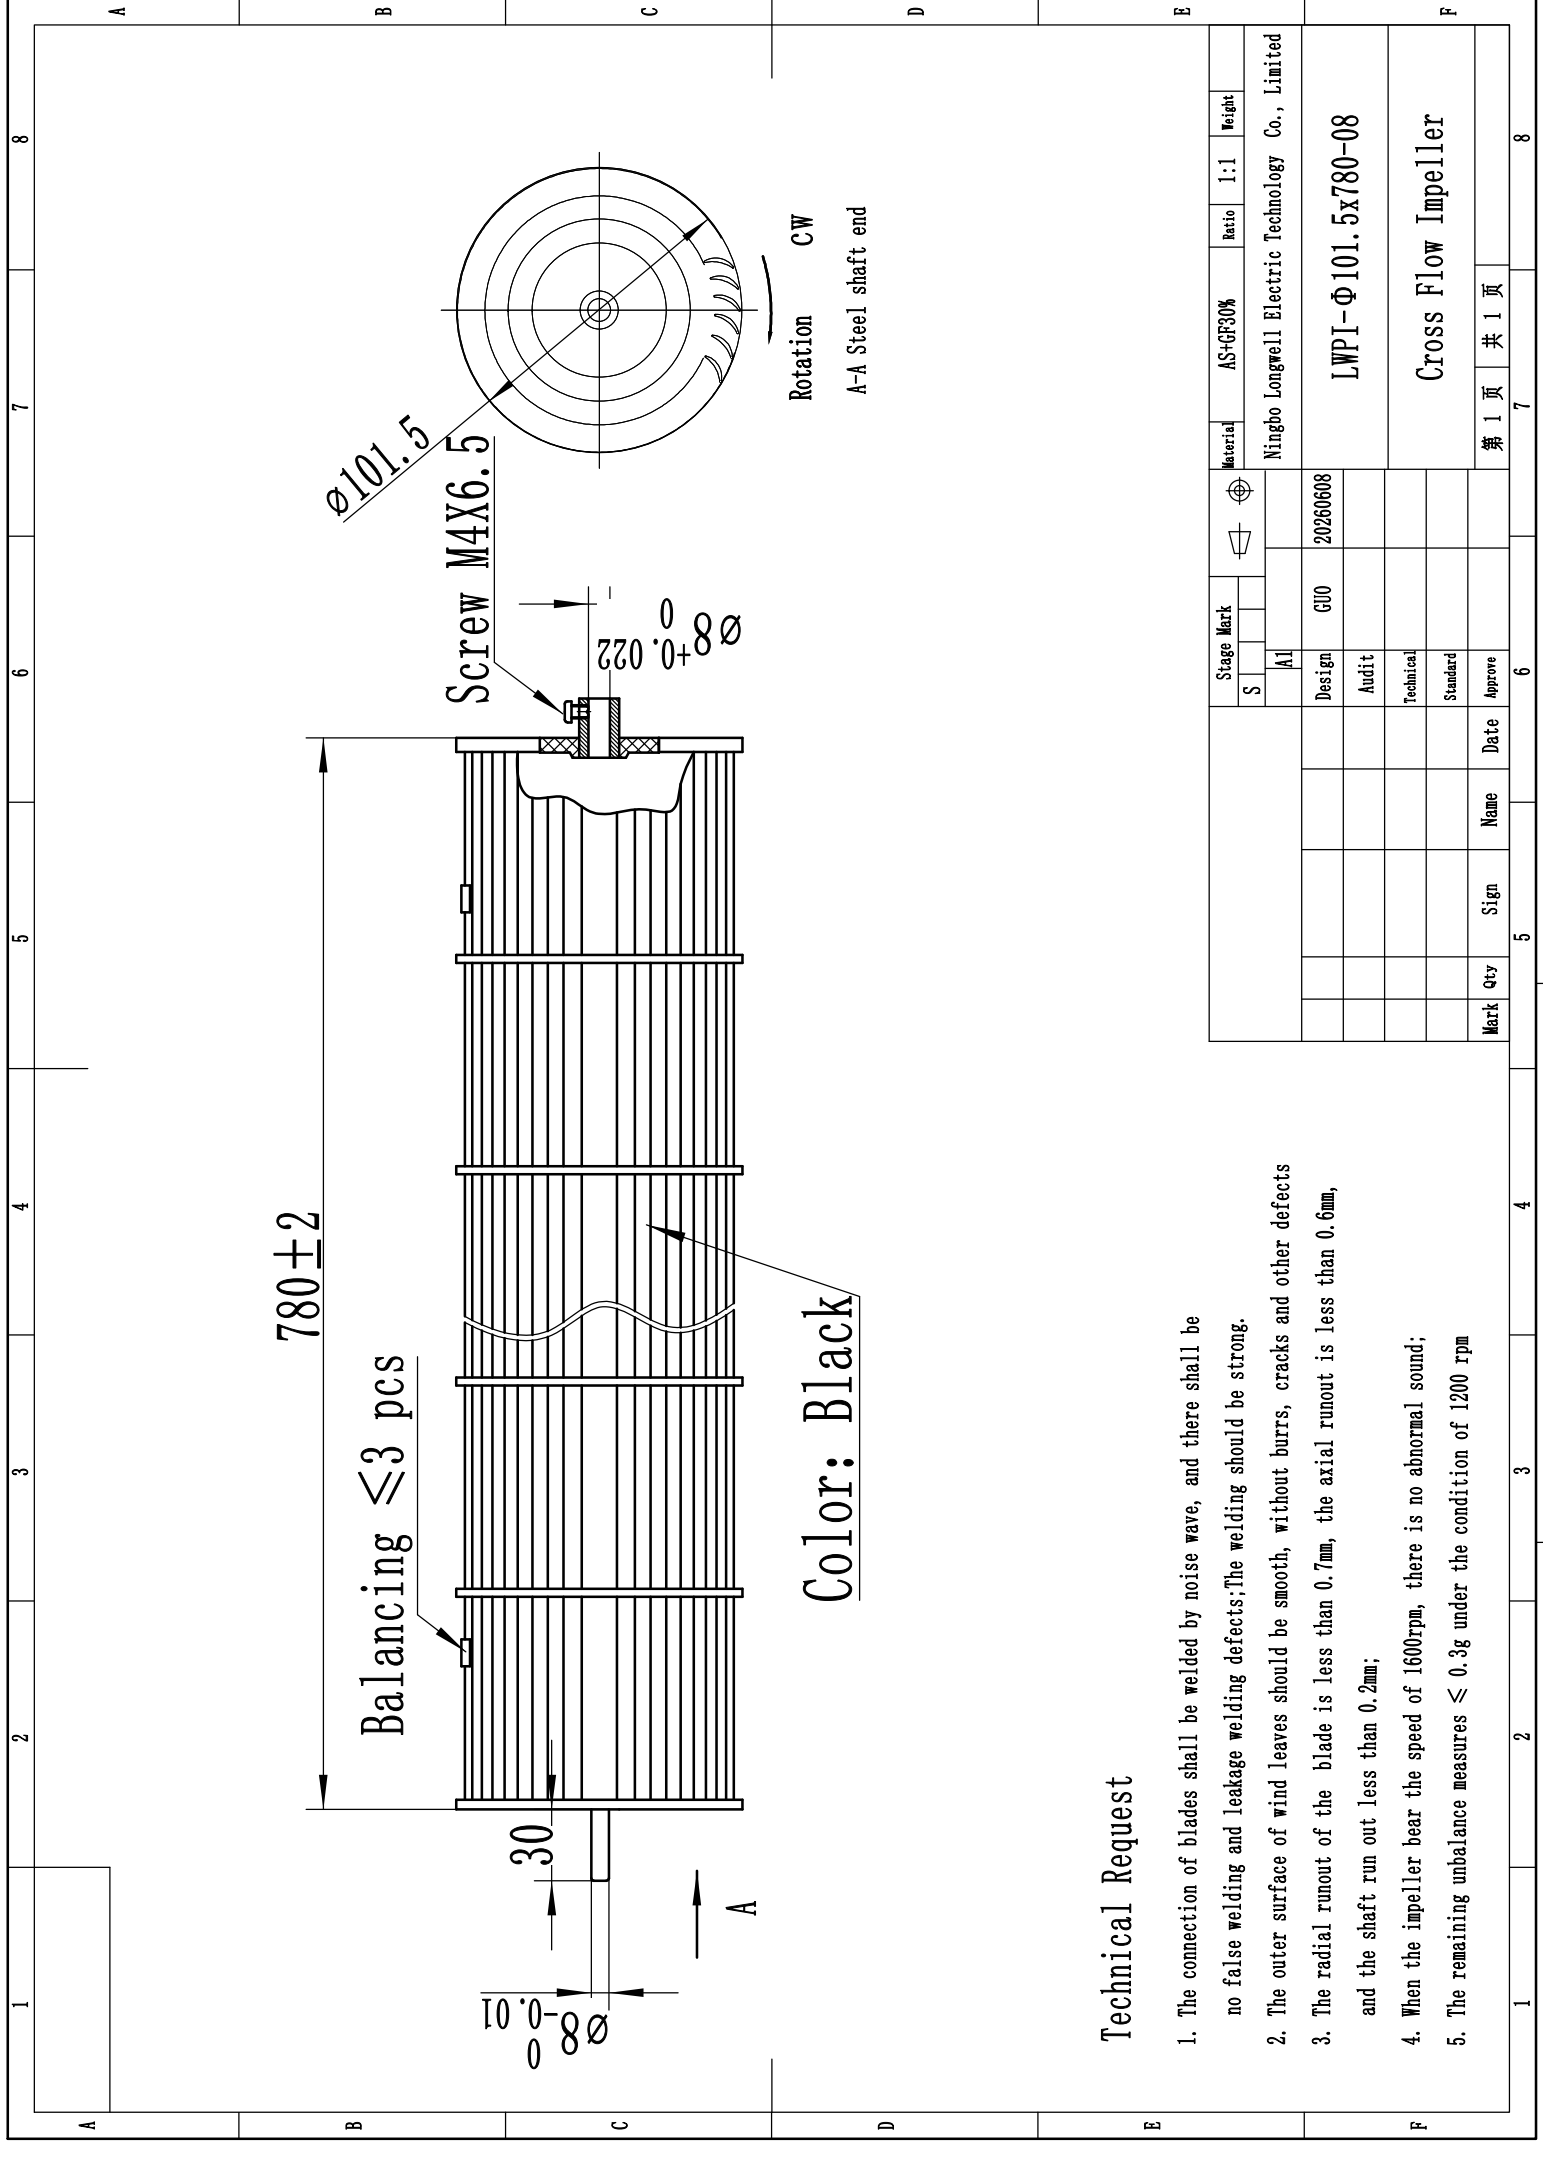

Technical Request

- 1. The connection of blades shall be welded by noise wave, and there shall be no false welding and leakage welding defects;The welding should be strong.
- 2. The outer surface of wind leaves should be smooth, without burrs, cracks and other defects
- 3. The radial runout of the blade is less than 0.7mm, the axial runout is less than 0.6mm, and the shaft run out less than 0.2mm;
- 4. When the impeller bear the speed of 1600rpm, there is no abnormal sound;
- 5. The remaining unbalance measures ≤ 0.3g under the condition of 1200 rpm

				Stage Mark				Material	AS+GF30%	Ratio	1:1	Weight
				S								
				A1								
				Design	GU0	20250608		Ningbo Longwell Electric Technology Co., Limited				
				Audit				LWPI-Φ101.5x780-08				
				Technical				Cross Flow Impeller				
				Standard								
Mark	Qty	Sign	Name	Date	Approve			第 1 页	共 1 页			