
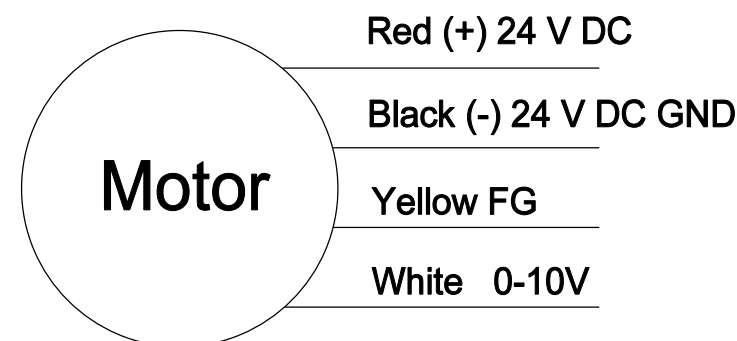
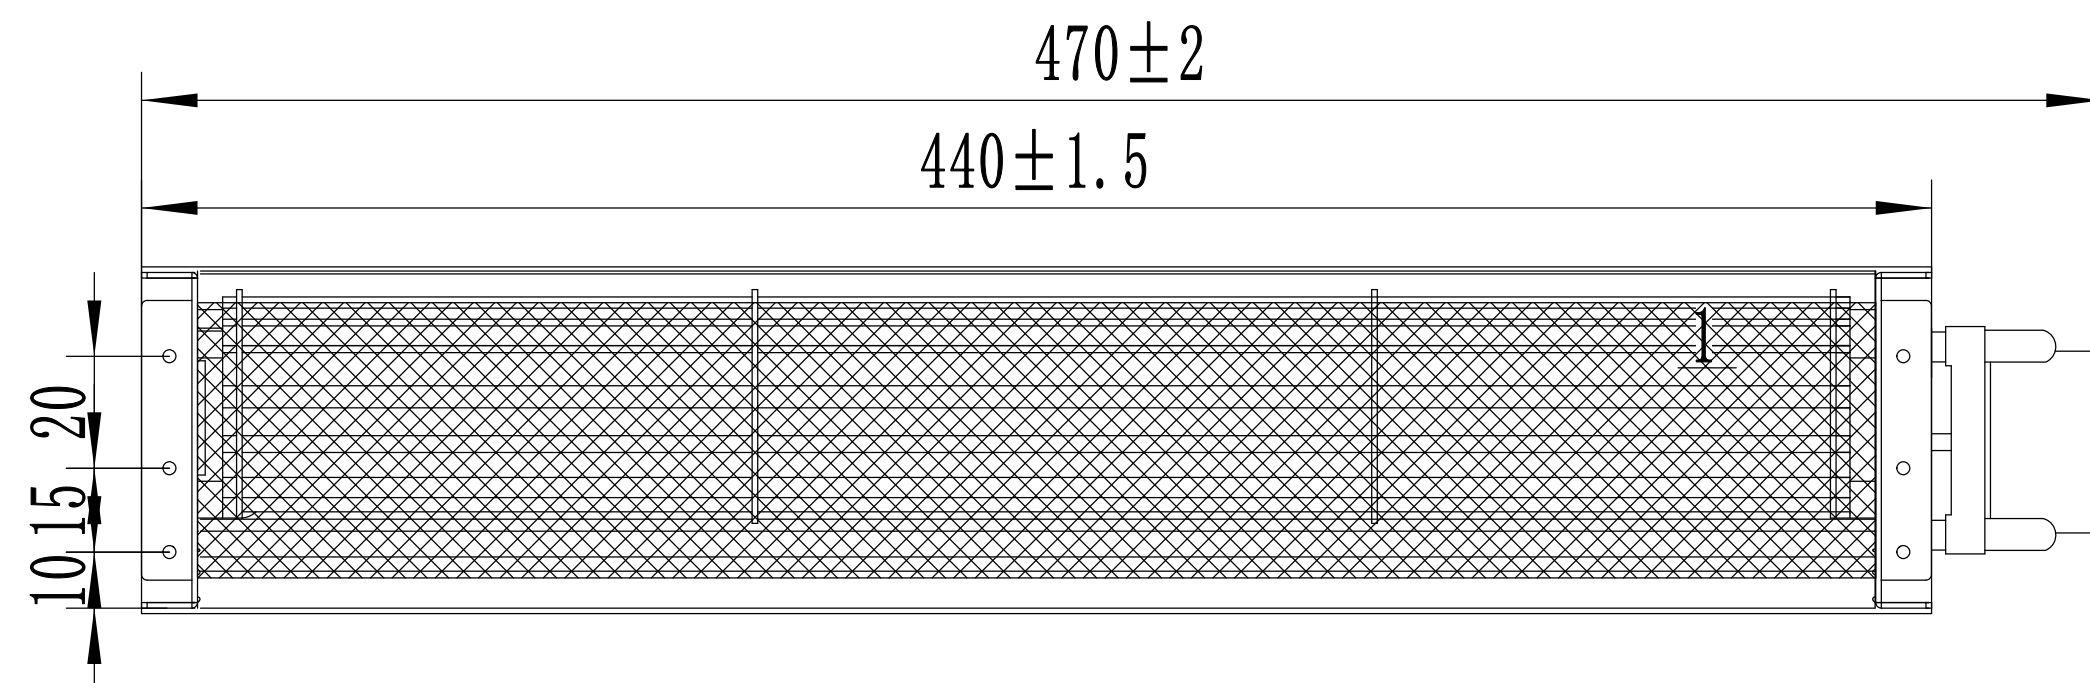
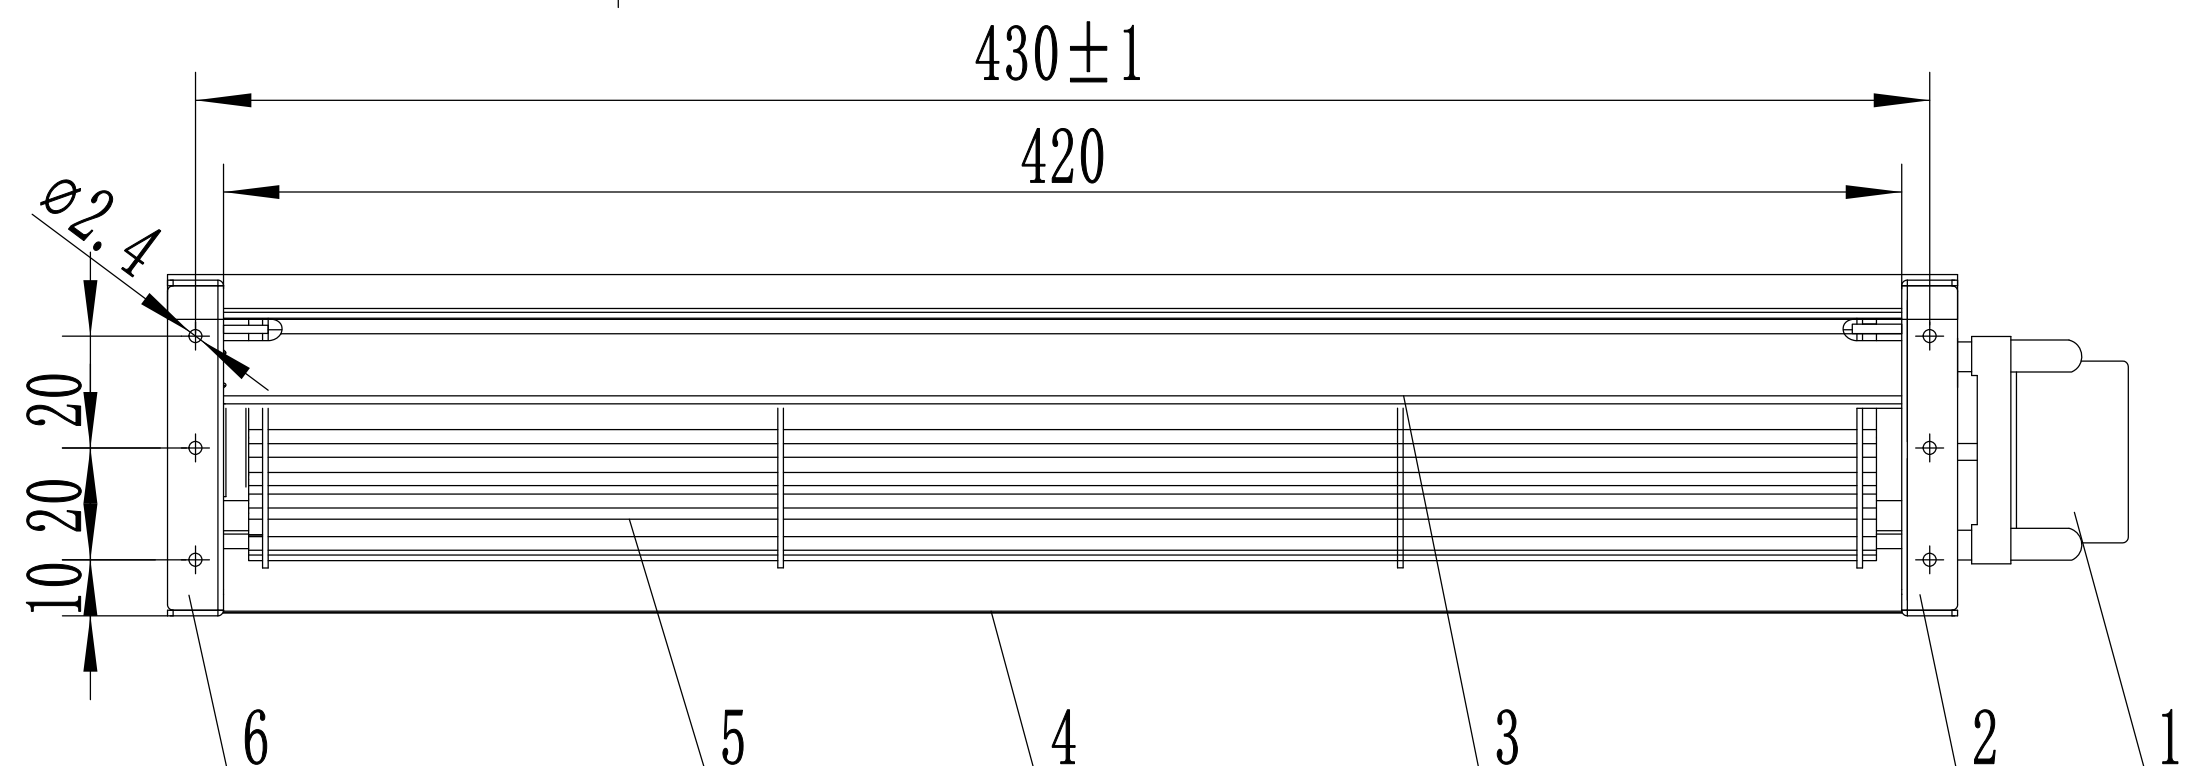


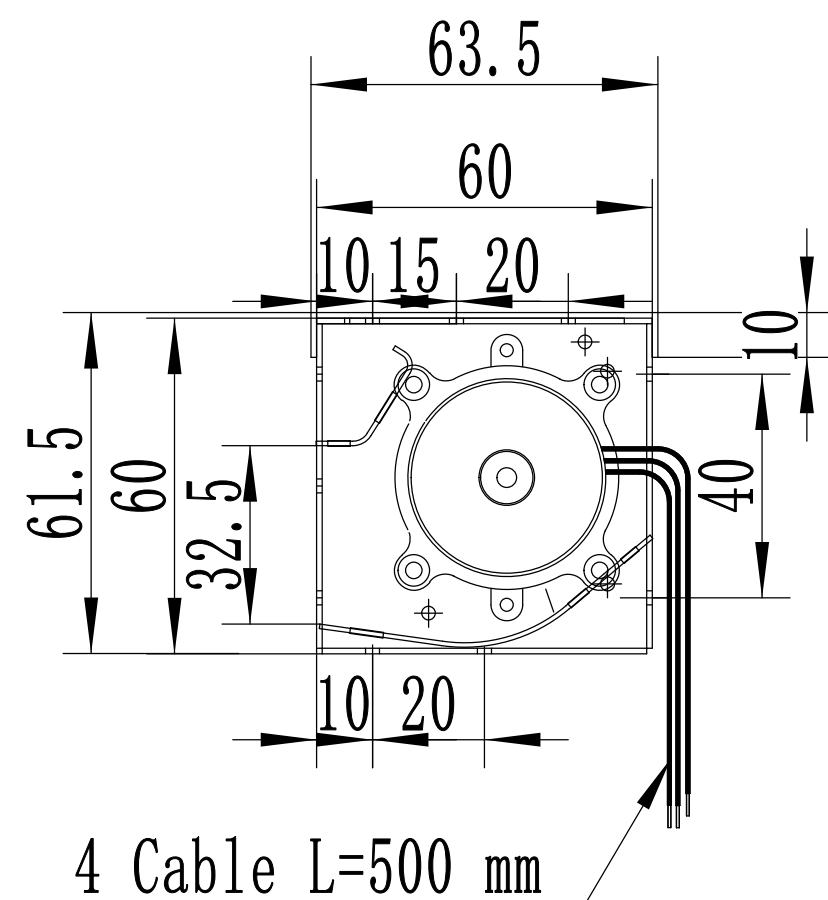


Technical Request

1. The appearance and surface of the product should be clean, without rust spots, mildew, scratches, No obvious burr and other surface defects.
2. Shell riveted firmly, no obvious gap, size in line with the drawing requirements.
3. Impeller direction: left rotation, sleeve built-in.
4. Safety performance in accordance with GB/T13933-2008 regulations.
5. Unnoted tolerance is GB/T1804-v.

No.	Item	Material	Qty
1	Motor	3725	1
2	Right Side Plate	Iron	1
3	Air Outlet Plate	Iron	1
4	Air Inlet Plate	Iron	1
5	Impeller	Al	1
6	Left Side Plate	Iron	1

SPECIFICATION

VOLTAGE (V)	DC 24V
CURRENT (A)	0.17
SPEED (r/min)	2400
AIR VOLUME (m ³ /h)	191
BEARINGS	Ball bearing
Speed control	0~10V
INPUT POWER (W)	4

					Stage Mark				Material		Ratio		1:1		Weight	
					S					Ningbo Longwell Electric Technology Co., Limited						
					Version	A1	Name		Date		LWCD-43420MG-07-00					
				Design	GU0	20260417										
				Audit												
				Technical												
				Standard				第 1 页 共 1 页								
Mark	Qty	Sign	Name	Date	Approve											