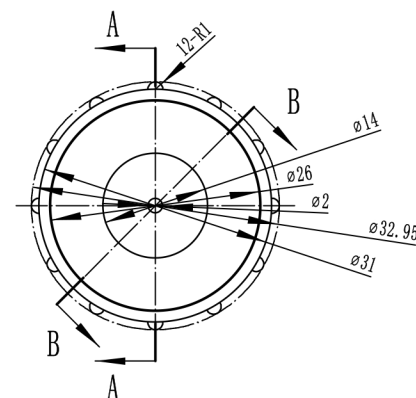
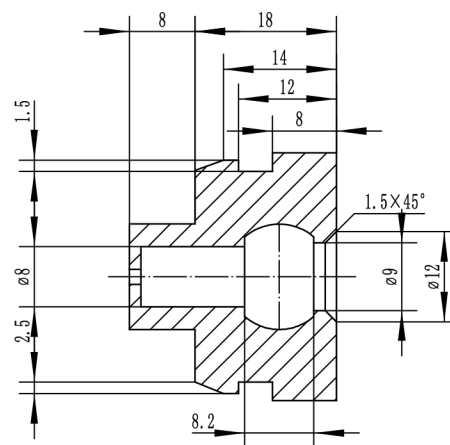


- 1:The product shall be free of defects such as blowholes and obvious flash.
- 2:Shore hardness (A): 40 - 45
- 3:Tensile strength at break: not less than 800 N/cm
- 4:Operating temperature range: -40 ° C to +100 ° C
- 5:Unmarked dimensional tolerances shall comply with GB1804-m.

					Stage Mark				Material		Ratio		1:2.5		Weight	
					S					Ningbo Longwell Electric Technology Co., Limited						
					Al											
					Design	HE	20260331	LW-C03-80-03								
					Audit											
					Technical											
					Standard											
Mark	Qty	Sign	Name	Date	Approve				第 1 页	共 1 页						