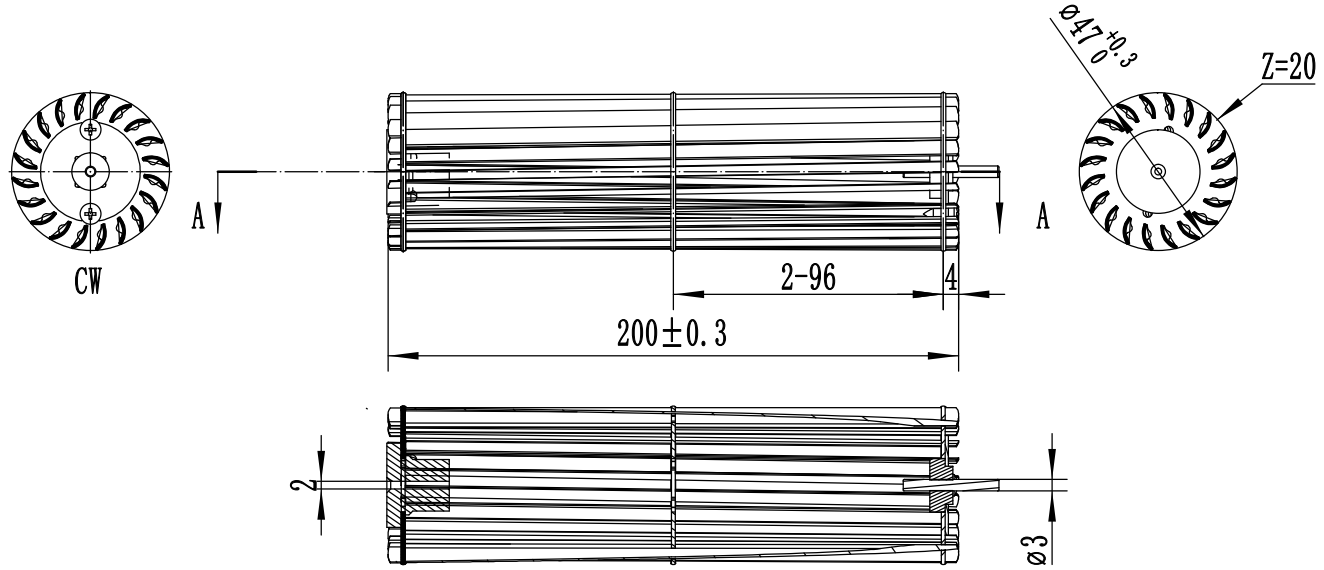


Technical Request

1. The appearance surface is clean, and there are no defects such as deformation, scratches and obvious burrs.
2. Riveting fastening in place, no loosening, slipping teeth and other undesirable phenomena.
3. The chord length difference of the adjacent outlet ends of the blade is not more than 0.5mm.
4. Dynamic balance, when L≤500mm, the residual unbalance is less than 200mg; When the L > is 500mm, the residual unbalance is less than 300mg.
5. The radial runout of the steel shaft end ≤ 0.10mm, the radial runout of each middle plate is less than 0.5mm,
and the axial runout of the middle plate at both ends is less than 0.5mm.
6. The unmarked dimensional tolerance shall be implemented according to GB/T 1804-V.

Mark	Qty	Sign	Name	Date	Stage Mark		
					S		
					A1		
					Design	GUO	20260630
					Audit		
					Technical		
					Standard		
					Approve		

Material		Ratio	1:2.5	Weight	
Ningbo Longwell Electric Technology Co., Limited					
LWMI-ϕ45*200-02					
第 1 页	共 1 页				