





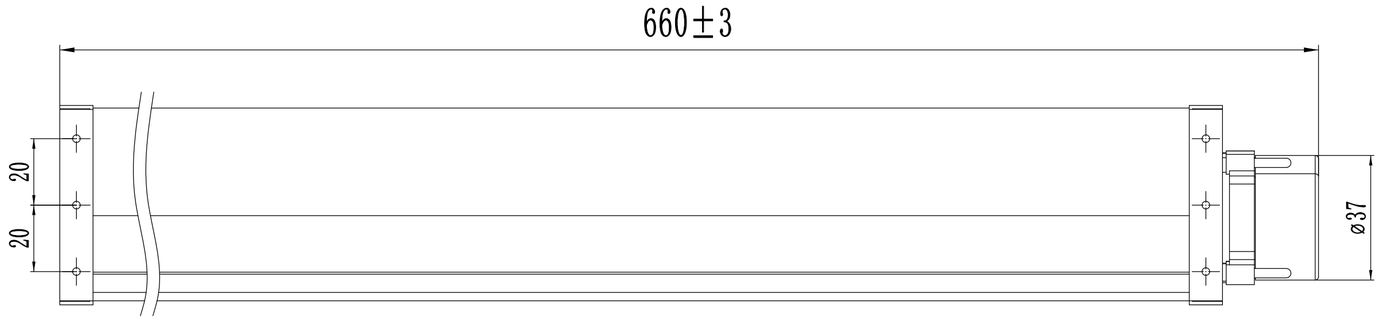

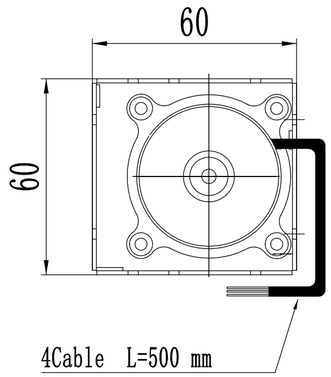

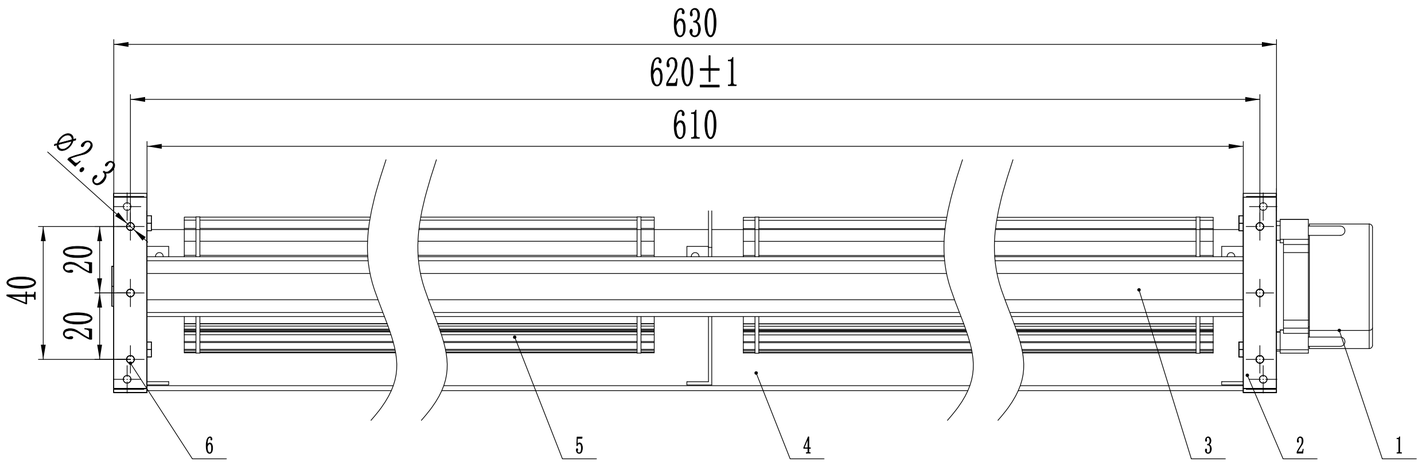



Technical Request

1. The appearance and surface of the product should be clean, without rust spots, mildew, scratches, No obvious burr and other surface defects.
2. Shell riveted firmly, no obvious gap, size in line with the drawing requirements.
3. Make the impeller 22 blades, steel shaft ø3, bushing ø 1.5
4. Safety performance in accordance with GB/T13933-2008 regulations.
5. Unnoted tolerance is GB/T1804-v.

SPECIFICATION

VOLTAGE (VDC)	24
CURRENT (A)	0.21
SPEED (r/min)	2400
BEARINGS	Ball bearing
SPEED CONTROL	0~10V

序号	代号	名称	数量	材料	单件 重量	总计 重量	备注
6		Left Side Plate	1	Iron			
5		Impeller	2	Aluminium			
4		Air Outlet Plate	1	Aluminium			
3		Air Inlet Plate	1	Aluminium			
2		Right Side Plate	1	Iron			
1	3725	Motor	1				

					Stage Mark		
					S		
					Version A1	Name	Date
					Design	ZHANG	20260602
					Audit		
					Technical		
					Standard		
Mark	Qty	Sign	Name	Date	Approve		

Material | Ratio 1:1 | Weight

Ningbo Longwell Electric Technology Co., Limited

LWCD-40610MN-06-00

第 1 页 共 1 页