
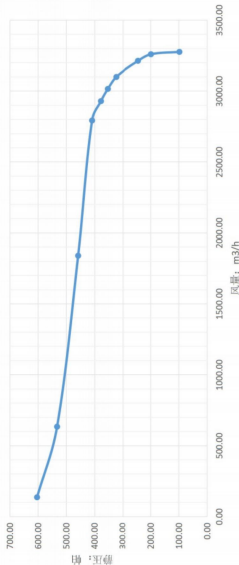


Technical Request

1. When the fan is running at high speed, there is no abnormal noise, and there are no obvious scratches, indentations, deformations, oil stains, and other defects on the surface of each component
2. The radial runout of the impeller is less than 1.2mm; Axial runout less than 1.0mm
3. The residual imbalance is less than 150mg
4. Unmarked tolerance shall be executed according to GB/T1804-2000W
5. Each electric welding is uniform and firm, and the inner and outer welding points are coated with silver gray paint.



SPECIFICATION	
VOLTAGE (V)	220
Frequency (Hz)	50
Speed (r/min)	1250
Current (A)	4.9
Power input (W)	550
Insulation Class	CLF
Protection Type	IP20

[illegible]