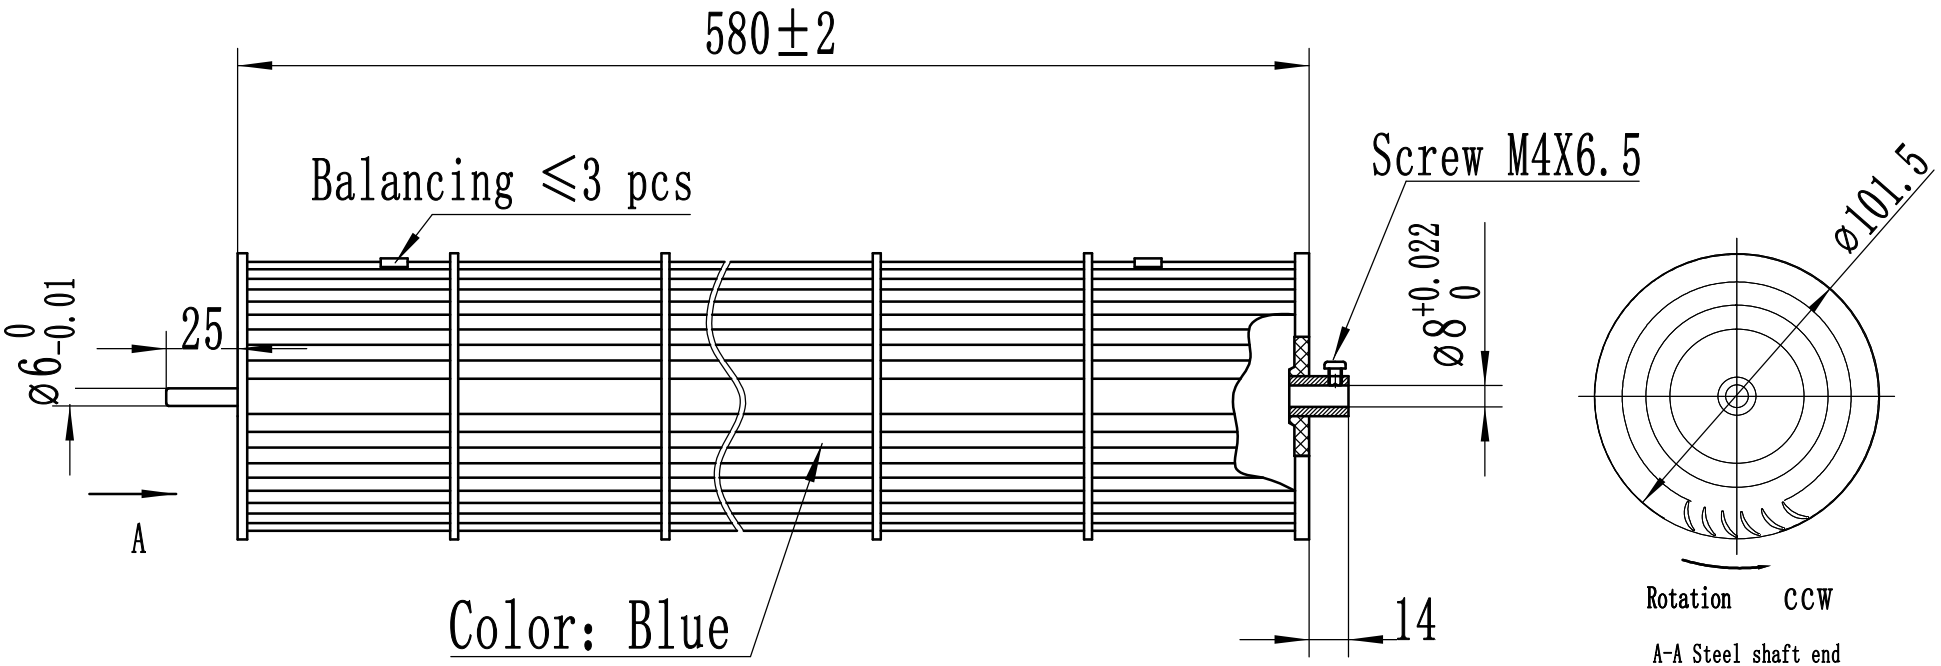


Technical Request

1. The connection of blades shall be welded by noise wave, and there shall be no false welding and leakage welding defects;The welding should be strong.
2. The outer surface of wind leaves should be smooth, without burrs, cracks and other defects
3. The radial runout of the blade is less than 0.7mm, the axial runout is less than 0.6mm, and the shaft run out less than 0.2mm;
4. When the impeller bear the speed of 1600rpm, there is no abnormal sound;
5. The remaining unbalance measures ≤ 0.3g under the condition of 1200 rpm

Mark	Qty	Sign	Name	Date			
					Stage Mark		
					S		
					A1		
					Design	GUO	20260610
					Audit		
					Technical		
					Standard		
					Approve		

Material	AS+GF30%	Ratio	1:1	Weight	
Ningbo Longwell Electric Technology Co., Limited					
LWPI-ϕ101.5*580-02					
Cross Flow Impeller					
第 1 页	共 1 页				