


Delivery Premium Quality Fans Globally for Healthier Breathing

World's Largest Selection of Fan Products
World's Most Comprehensive Fan Solutions

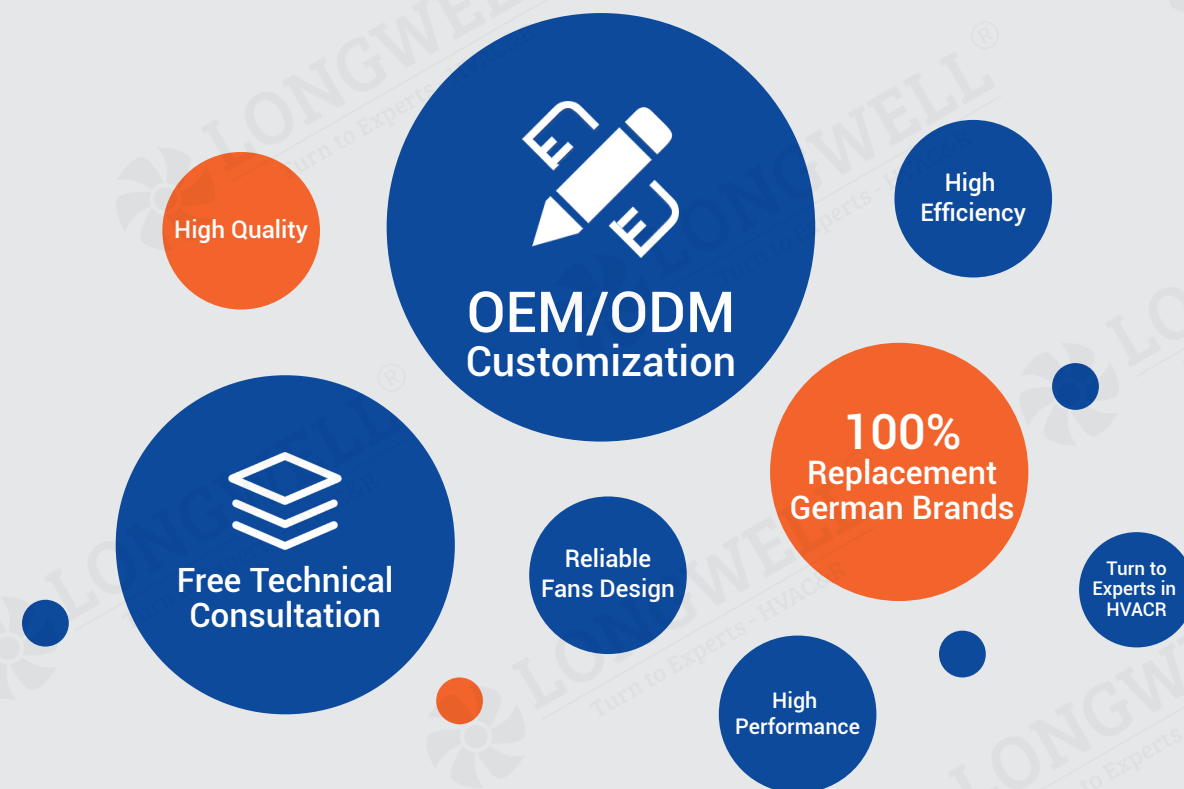

Ningbo Longwell Electric Technology Co., Ltd

Headquarter: NO.100, South of Xuxiang River, Yuyao, Zhejiang Province, China 315400

Tell: +86 574 6218 9863

Fax: +86 574 6218 9863

Phone: 0086 183 5827 4663

Web: www.longwellfans.com | www.longwell-group.com | www.longwell-media.com

Email: sales@zjlongwell.com



LONGWELL TECHNOLOGY

**"Born for High-Quality Breathing
LONGWELL Fans Power Your Equipments"**



**Professional Manufacturer
of HVACR Fan & Motors**

—— DC/EC Axial Flow Fan

Longwell Group

Longwell-China
Longwell-USA
Longwell-Russia
Longwell-Europe

CATALOGUE

01-02	About Longwell
03-04	Testing and Standards
05	Type Code
06-73	DC Axial Flow Fan
74-91	DC Blower
92-98	EC Axial Flow Fan

About Longwell

Born for High-Quality Breathing, LONGWELL Fans Power Your Equipment

OEM for Well-Known Brands

Supplies Fortune 500 Companies

Global Technical Support

LONGWELL is a leading fan manufacturer, specializing in high-quality fans, blowers, motors, and components for heating, ventilation, air conditioning, and refrigeration applications. We have a strong presence in delivery capabilities, design and R&D capabilities, as well as manufacturing, placing us at the forefront of the industry.

Our product range includes EC/DC/AC centrifugal fans, axial fans, AC/BLDC cross-flow fans, single/double forward curved fans, AC/BLDC/ECM motors, and industrial fan blowers. Since our establishment in 1990, we have continuously upgraded our facilities and production capacity, boasting advanced testing labs and production facilities with an annual capacity of millions of fans. With over 20 years of experience, we are highly skilled in the design, development, and manufacture of fans and motors. We export to over 30 countries and serve numerous Fortune 500 clients.

Our facilities and products are compliant with certifications such as ISO9001, ISO14001, BSCI, CE, UL/ETL, CCC, EMC, and LVD. These certifications demonstrate our compliance in quality management, environmental management, social responsibility, and product safety. We are quality-oriented and dedicated to providing products and services that meet international standards. 

Equipped with advanced testing labs and production facilities, including a B&K noise lab, CFD simulation lab, air dynamics test chambers, automatic welding machines, CNC machining centers, and auto robot injection machines, we ensure efficient production and on-time delivery.

As industry leaders, we prioritize technological innovation and efficiency. We employ advanced technologies such as aerodynamics principles and CFD simulation to ensure precise and efficient fan designs. Additionally, we offer customized services to design and manufacture fan systems according to specific customer requirements. Our focus is on providing high-tech, high-efficiency products that meet our customers' needs and contribute to a better future.

At LONGWELL, innovation is at the core of our operations, driving continuous improvement. With our extensive experience and expertise, we can quickly customize solutions that meet customer needs. We emphasize technological sophistication, utilizing advanced technologies and high-performance materials to deliver products that are efficient, safe, and reliable. Our brand is widely recognized globally, and we are committed to promoting sustainable development and advancing the efficient fan industry.

LONGWELL looks forward to collaborating with you and providing high-quality customized fan and motor solutions. Please feel free to contact us as we work together to create a brighter future.

193

Staff

40000m²

Floor Space

500⁺

Branding Clients

1Million⁺ PCS

Annual Outputs

6

Overseas Offices
on Spot Support

50⁺

Members
R&D Team



B&K Noise Testing Lab



Production Line



Automatic Welding



Balance Machine



Automatic Welding Machine



Production Line - Centrifugal Fan



Automatic CNC Machine



Air Dynamic Test Lab



Production Line - Axial Fans



Production Line

Testing and Standards

- ISO GB/T 19001-2016 idt ISO 9001:2015/GB/T 24001-2016 idt ISO 14001:2015/GB/T 45001-2020 idt ISO 45001:2018
- UL 507:2017 Ed.10+R:27/CSA C22.2#113:2018 Ed.11
- BSCI ANSI C63.4:2014/ANSI C63.4a-2017
- EN IEC 55014-1:2021/EN IEC 55014-2:2021/EN IEC 61000-3-2:2019 +A1:2021
EN 61000-3-3:2013 +A1:2019 +A2:2021 +AC:2022-01
EN 60335-2-80:2003 +A1:2004 +A2:2009;
EN 60335-1:2012 +A11:2014 +A13:2017 +A1:2019+A14:2019 +A2:2019+A15:2021
EN 62321-1:2013/EN 62321-2:2014/EN 62321-3-1:2014
EN 62321-4:2014+A1:2017/EN 62321-5:2014/EN 62321-6:2015
EN 62321-7-1:2015/EN 62321-7-2:2017/EN 62321-8:2017




Enterprise Credit Evaluation Certificate - Highest Level in China




Own-Brand



Own-Brand

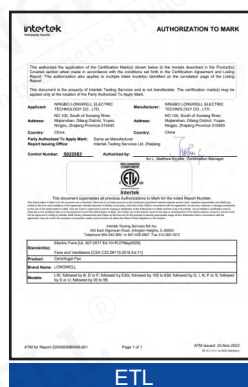

ETL

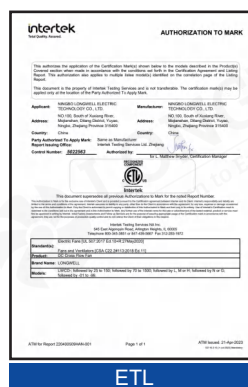


ETL



CE



RoHS

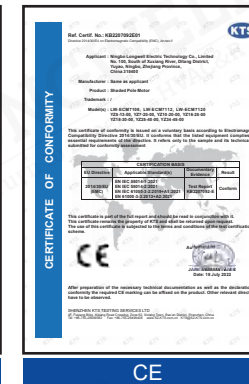


CE




CE




CE

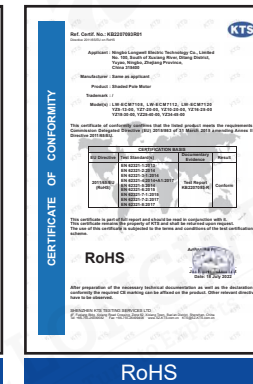


RoHS

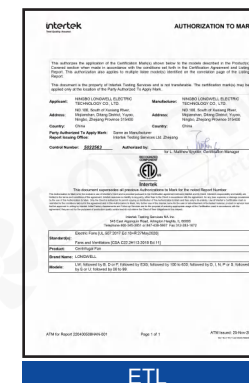


ETL

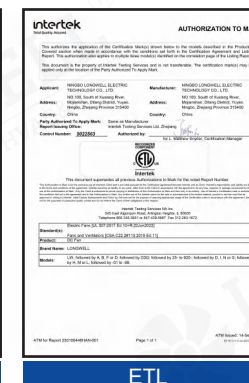

ETL

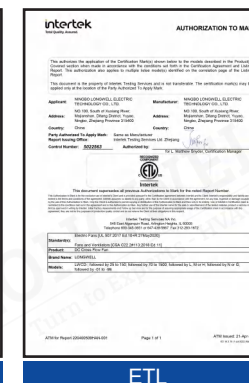

ETL

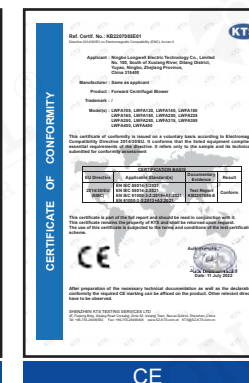

CE



CE



ISO 9001




ISO 9001



RoHS



RoHS

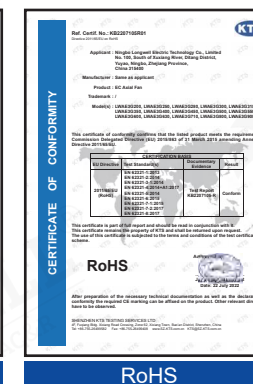

RoHS



RoHS



RoHS



CE



CE



CE

Type Code

LW A D 2010 K H - 02

Series Number

X-Extra High H-High M-Middle
L-Low D-Extra Low

T-400V S-230V U-115V
K-5V L-12V M-24V H-48V

Frame or Impeller Size Code

A-AC D-DC E-EC

A-Axial Fan F-Forward blower

Longwell

DC Axial Flow Fan

Professional HVAC Fan & Motors Manufacturer



LWAD2010 Serise


Product Characteristic

- Frame: Plastic(UL94V-0)
- Impeller: Plastic(UL94V-0)
- Lead Wire: UL1571AWG#28 or Equivalent (+)Red,(-)Black
- Ball Bearing: 50,000hrs(40°C)
- Sleeve Bearing: 30,000hrs(40°C)
- Operating Temperature: -10°C~+70°C
- Storage Temperature: -40°C~+70°C



Technical Specifications

Model	Bearing Type	Rated Voltage(VDC)	Operating Voltage(VDC)	Input Current(A)	Input Power(W)	Speed (RPM)	Max Air Flow (CFM)	Max Air Flow (m³/min)	Max Static Pressure (Inch-H₂O)	Max Static Pressure (Pa)	Noise [dB(A)]	Weight (g)
LWAD2010KX-01	B.S	5	3.5~5.5	0.20	1.00	20000	1.70	0.05	0.24	60.90	30.0	5.0
LWAD2010KH-02	B.S	5	3.5~5.5	0.13	0.65	15000	1.25	0.04	0.14	35.01	27.0	5.0
LWAD2010KM-03	B.S	5	3.5~5.5	0.10	0.50	10000	0.73	0.02	0.05	11.77	22.0	5.0
LWAD2010KL-04	B.S	5	3.5~5.5	0.07	0.35	8000	0.42	0.01	0.04	8.73	21.0	5.0
LWAD2010LX-01	B.S	12	7.0~13.8	0.07	0.84	20000	1.70	0.05	0.24	60.90	30.0	5.0
LWAD2010LH-02	B.S	12	7.0~13.8	0.05	0.60	15000	1.25	0.04	0.14	35.01	27.0	5.0
LWAD2010LM-03	B.S	12	7.0~13.8	0.03	0.36	10000	0.73	0.02	0.05	11.77	22.0	5.0

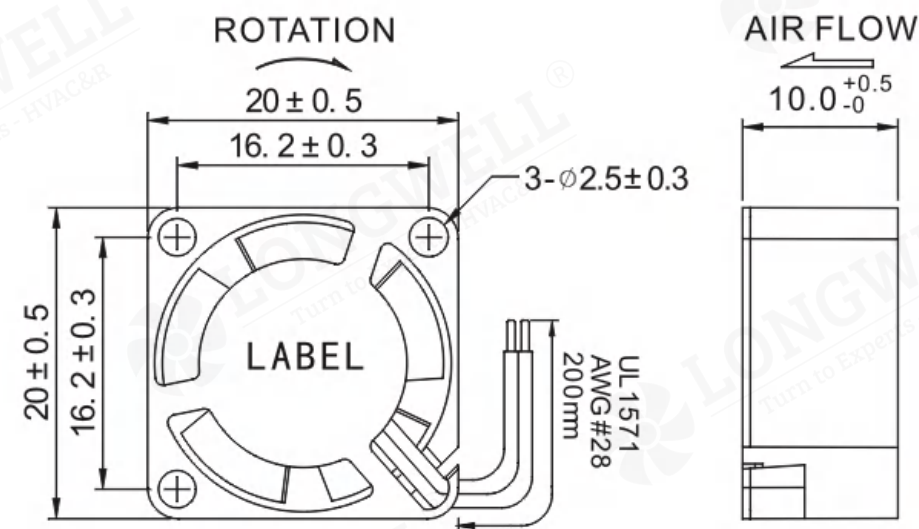

LWAD2507 Serise


Product Characteristic

- Frame: Plastic(UL94V-0)
- Impeller: Plastic(UL94V-0)
- Lead Wire: UL1571AWG#28 or Equivalent (+)Red,(-)Black
- Ball Bearing: 50,000hrs(40°C)
- Sleeve Bearing: 30,000hrs(40°C)
- Operating Temperature: -10°C~+70°C
- Storage Temperature: -40°C~+70°C



Technical Specifications

Model	Bearing Type	Rated Voltage(VDC)	Operating Voltage(VDC)	Input Current(A)	Input Power(W)	Speed (RPM)	Max Air Flow (CFM)	Max Air Flow (m³/min)	Max Static Pressure (Inch-H₂O)	Max Static Pressure (Pa)	Noise [dB(A)]	Weight (g)
LWAD2507KH-01	B.S	5	3.5~5.5	0.18	0.90	12000	1.97	0.06	0.16	39.03	30.0	5.0
LWAD2507KM-02	B.S	5	3.5~5.5	0.15	0.75	10000	1.57	0.04	0.11	26.48	24.0	5.0
LWAD2507KL-03	B.S	5	3.5~5.5	0.12	0.60	8000	1.15	0.03	0.07	16.38	21.0	5.0
LWAD2507KD-04	B.S	5	3.5~5.5	0.07	0.35	6000	0.69	0.02	0.03	7.16	20.0	5.0
LWAD2507LH-01	B.S	12	7.0~13.8	0.07	0.84	12000	1.97	0.06	0.16	39.03	30.0	5.0
LWAD2507LM-02	B.S	12	7.0~13.8	0.05	0.60	10000	1.57	0.04	0.11	26.48	24.0	5.0
LWAD2507LL-03	B.S	12	7.0~13.8	0.04	0.48	8000	1.15	0.03	0.07	16.38	21.0	5.0

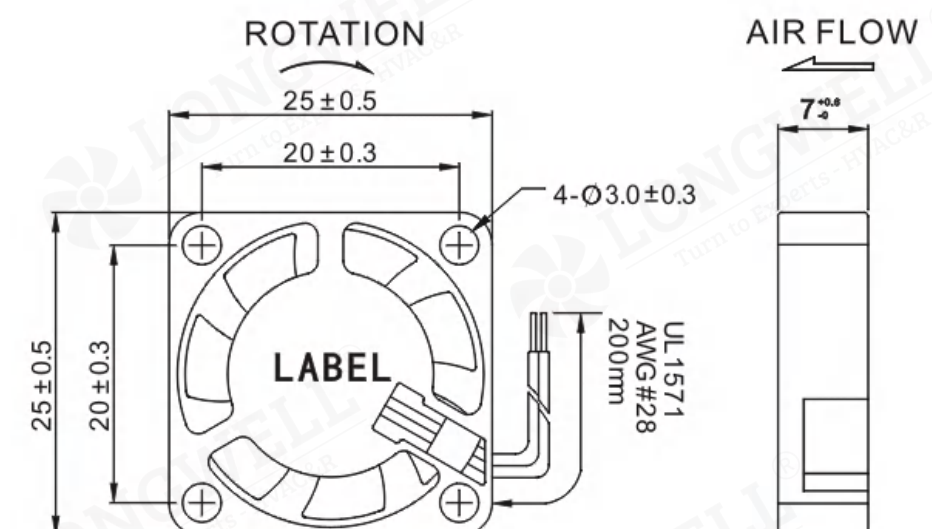

LWAD2510 Serise


Product Characteristic

- Frame: Plastic(UL94V-0)
- Impeller: Plastic(UL94V-0)
- Lead Wire: UL1571AWG#28 or Equivalent (+)Red,(-)Black
- Ball Bearing: 50,000hrs(40°C)
- Sleeve Bearing: 30,000hrs(40°C)
- Operating Temperature: -10°C~+70°C
- Storage Temperature: -40°C~+70°C



Technical Specifications

Model	Bearing Type	Rated Voltage(VDC)	Operating Voltage(VDC)	Input Current(A)	Input Power(W)	Speed (RPM)	Max Air Flow (CFM)	Max Air Flow (m³/min)	Max Static Pressure (Inch-H₂O)	Max Static Pressure (Pa)	Noise [dB(A)]	Weight (g)
LWAD2510KX-06	B.S	5	3.5~5.5	0.20	1.00	12000	2.24	0.06	0.21	51.39	27.0	6.0
LWAD2510KH-07	B.S	5	3.5~5.5	0.18	0.90	10000	1.91	0.05	0.16	39.42	25.0	6.0
LWAD2510KM-08	B.S	5	3.5~5.5	0.14	0.70	8000	1.46	0.04	0.09	22.65	22.0	6.0
LWAD2510KL-09	B.S	5	3.5~5.5	0.10	0.50	6000	1.00	0.03	0.05	13.44	18.0	6.0
LWAD2510LX-07	B.S	12	7.0~13.8	0.10	1.20	12000	2.24	0.06	0.21	51.39	27.0	6.0
LWAD2510LH-15	B.S	12	7.0~13.8	0.08	0.96	10000	1.91	0.05	0.16	39.42	25.0	6.0
LWAD2510LM-09	B.S	12	7.0~13.8	0.06	0.72	8000	1.46	0.04	0.09	22.65	22.0	6.0
LWAD2510LL-10	B.S	12	7.0~13.8	0.04	0.48	6000	1.00	0.03	0.05	13.44	18.0	6.0

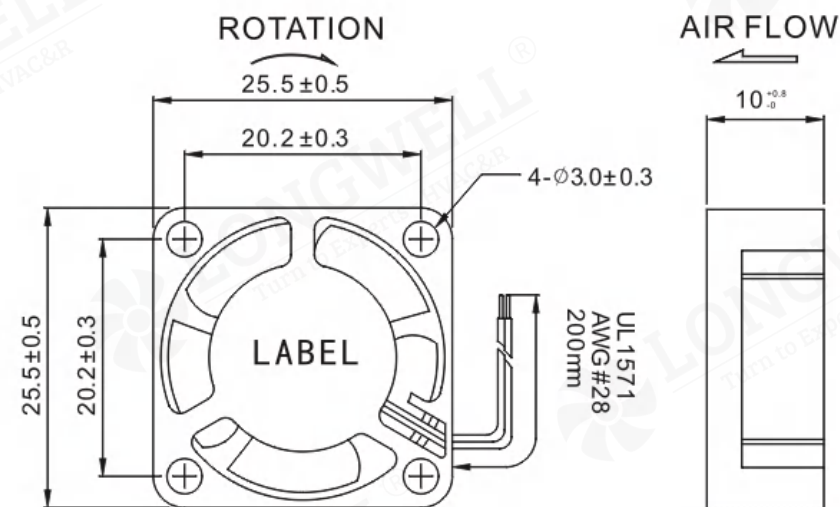

LWAD3007 Serise


Product Characteristic

- Frame: Plastic(UL94V-0)
- Impeller: Plastic(UL94V-0)
- Lead Wire: UL1571AWG#28 or Equivalent (+)Red,(-)Black
- Ball Bearing: 50,000hrs(40°C)
- Sleeve Bearing: 30,000hrs(40°C)
- Operating Temperature: -10°C~+70°C
- Storage Temperature: -40°C~+70°C



Technical Specifications

Model	Bearing Type	Rated Voltage(VDC)	Operating Voltage(VDC)	Input Current(A)	Input Power(W)	Speed (RPM)	Max Air Flow (CFM)	Max Air Flow (m³/min)	Max Static Pressure (Inch-H₂O)	Max Static Pressure (Pa)	Noise [dB(A)]	Weight (g)
LWAD3007KX-01	B.S	5	3.5~5.5	0.22	1.10	12000	4.07	0.12	0.20	48.94	35.0	6.0
LWAD3007KH-02	B.S	5	3.5~5.5	0.18	0.90	10000	3.34	0.09	0.14	35.60	31.0	6.0
LWAD3007KM-03	B.S	5	3.5~5.5	0.14	0.70	8000	2.48	0.07	0.10	23.93	26.0	6.0
LWAD3007KL-04	B.S	5	3.5~5.5	0.10	0.50	6000	1.57	0.04	0.05	11.67	22.0	6.0
LWAD3007LX-01	B.S	12	7.0~13.8	0.12	1.44	12000	4.07	0.12	0.20	48.94	35.0	6.0
LWAD3007LH-02	B.S	12	7.0~13.8	0.09	1.08	10000	3.34	0.09	0.14	35.60	31.0	6.0
LWAD3007LM-03	B.S	12	7.0~13.8	0.07	0.84	8000	2.48	0.07	0.10	23.93	26.0	6.0
LWAD3007LL-04	B.S	12	7.0~13.8	0.05	0.60	6000	1.57	0.04	0.05	11.67	22.0	6.0

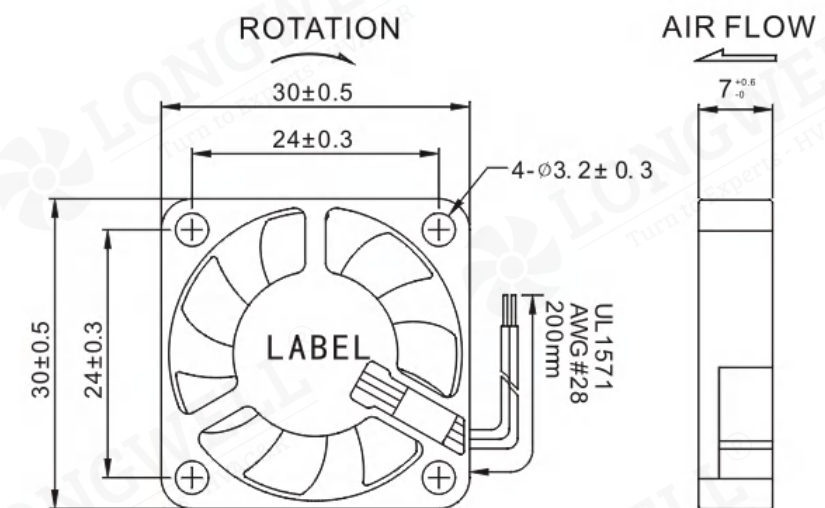

LWAD3010 Serise


Product Characteristic

- Frame: Plastic(UL94V-0)
- Impeller: Plastic(UL94V-0)
- Lead Wire: UL1571AWG#28 or Equivalent (+)Red,(-)Black
- Ball Bearing: 50,000hrs(40°C)
- Sleeve Bearing: 30,000hrs(40°C)
- Operating Temperature: -10°C~+70°C
- Storage Temperature: -40°C~+70°C



Technical Specifications

Model	Bearing Type	Rated Voltage(VDC)	Operating Voltage(VDC)	Input Current(A)	Input Power(W)	Speed (RPM)	Max Air Flow (CFM)	(m³/min)	Max Static Pressure (Inch-H₂O)	(Pa)	Noise [dB(A)]	Weight (g)
LWAD3010KX-07	B.S	5	3.5~5.5	0.28	1.40	12000	4.15	0.12	0.25	61.10	34.0	8.0
LWAD3010KH-08	B.S	5	3.5~5.5	0.20	1.00	10000	3.38	0.10	0.17	41.58	29.0	8.0
LWAD3010KM-09	B.S	5	3.5~5.5	0.15	0.75	8000	2.49	0.07	0.13	31.68	24.0	8.0
LWAD3010KL-10	B.S	5	3.5~5.5	0.10	0.50	6000	2.01	0.06	0.07	16.87	21.0	8.0
LWAD3010LX-08	B.S	12	7.0~13.8	0.12	1.44	12000	4.15	0.12	0.25	61.10	34.0	8.0
LWAD3010LH-09	B.S	12	7.0~13.8	0.10	1.20	10000	3.38	0.10	0.17	41.58	29.0	8.0
LWAD3010LM-10	B.S	12	7.0~13.8	0.08	0.96	8000	2.49	0.07	0.13	31.68	24.0	8.0
LWAD3010LL-11	B.S	12	7.0~13.8	0.05	0.60	6000	2.01	0.06	0.07	16.87	21.0	8.0

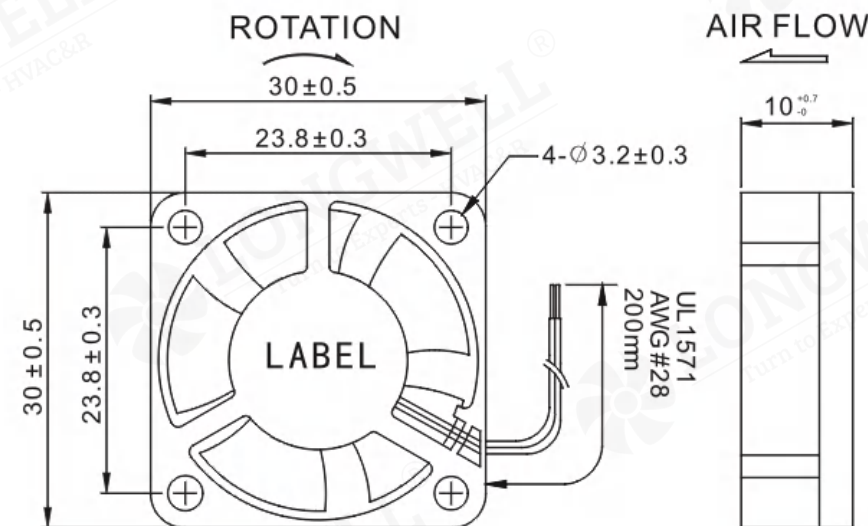

LWAD3015 Serise


Product Characteristic

- Frame: Plastic(UL94V-0)
- Impeller: Plastic(UL94V-0)
- Lead Wire: UL1571AWG#28 or Equivalent (+)Red,(-)Black
- Ball Bearing: 50,000hrs(40°C)
- Sleeve Bearing: 30,000hrs(40°C)
- Operating Temperature: -10°C~+70°C
- Storage Temperature: -40°C~+70°C



Technical Specifications

Model	Bearing Type	Rated Voltage(VDC)	Operating Voltage(VDC)	Input Current(A)	Input Power(W)	Speed (RPM)	Max Air Flow (CFM)	(m³/min)	Max Static Pressure (Inch-H₂O)	(Pa)	Noise [dB(A)]	Weight (g)
LWAD3015KH-01	B.S	5	3.5~5.5	0.25	1.25	10000	4.51	0.13	0.22	54.82	31.0	12.0
LWAD3015KM-02	B.S	5	3.5~5.5	0.17	0.85	8000	3.33	0.09	0.13	31.38	25.0	12.0
LWAD3015KL-03	B.S	5	3.5~5.5	0.12	0.60	6000	2.35	0.07	0.07	17.65	21.0	12.0
LWAD3015LH-01	B.S	12	7.0~13.8	0.12	1.44	10000	4.51	0.13	0.22	54.82	31.0	12.0
LWAD3015LM-02	B.S	12	7.0~13.8	0.09	1.08	8000	3.33	0.09	0.13	31.38	25.0	12.0
LWAD3015LL-03	B.S	12	7.0~13.8	0.06	0.72	6000	2.35	0.07	0.07	17.65	21.0	12.0

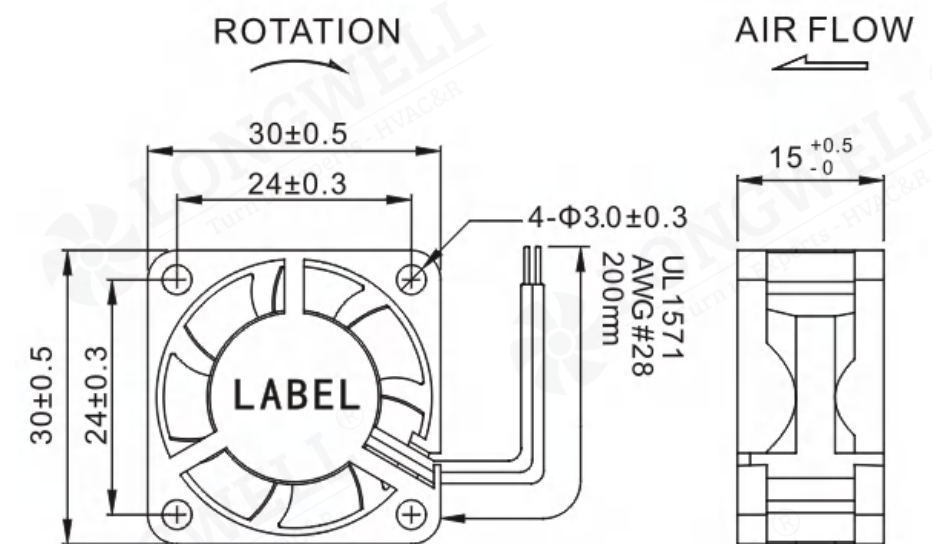

LWAD3510 Serise


Product Characteristic

- Frame: Plastic(UL94V-0)
- Impeller: Plastic(UL94V-0)
- Lead Wire: UL1571AWG#28 or Equivalent (+)Red,(-)Black
- Ball Bearing: 50,000hrs(40°C)
- Sleeve Bearing: 30,000hrs(40°C)
- Operating Temperature: -10°C~+70°C
- Storage Temperature: -40°C~+70°C



Technical Specifications

Model	Bearing Type	Rated Voltage(VDC)	Operating Voltage(VDC)	Input Current(A)	Input Power(W)	Speed (RPM)	Max Air Flow (CFM)	Max Air Flow (m³/min)	Max Static Pressure (Inch-H₂O)	Max Static Pressure (Pa)	Noise [dB(A)]	Weight (g)
LWAD3510KM-01	B.S	5	3.5~5.5	0.25	1.25	8000	6.51	0.18	0.16	39.42	29.0	10.0
LWAD3510KL-02	B.S	5	3.5~5.5	0.18	0.90	6000	4.88	0.14	0.10	24.61	26.0	10.0
LWAD3510KD-03	B.S	5	3.5~5.5	0.12	0.60	4000	3.15	0.09	0.04	11.18	22.0	10.0
LWAD3510LH-01	B.S	12	7.0~13.8	0.18	2.16	10000	7.48	0.21	0.22	54.23	32.0	10.0
LWAD3510LM-02	B.S	12	7.0~13.8	0.14	1.68	8000	6.51	0.18	0.16	39.42	29.0	10.0
LWAD3510LL-03	B.S	12	7.0~13.8	0.10	1.20	6000	4.88	0.14	0.10	24.61	26.0	10.0

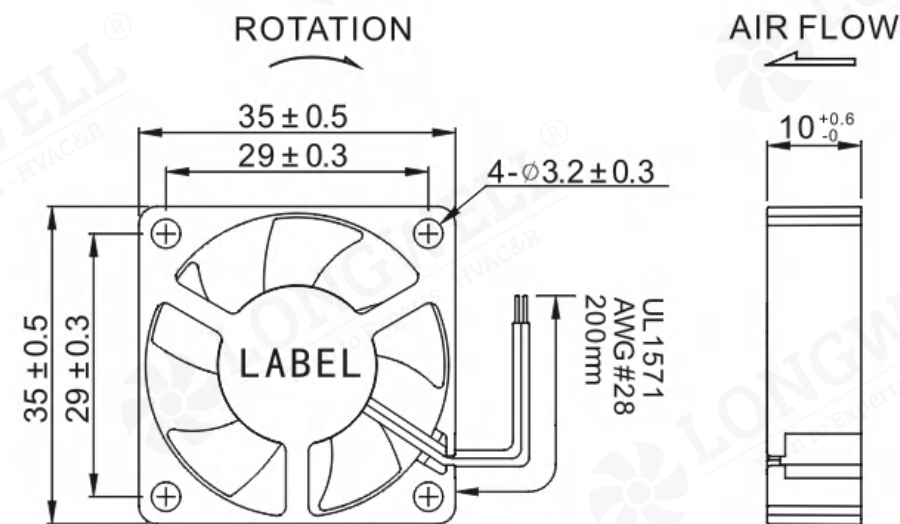

LWAD4010 Serise


Product Characteristic

- Frame: Plastic(UL94V-0)
- Impeller: Plastic(UL94V-0)
- Lead Wire: UL1007AWG#26 or Equivalent (+)Red,(-)Black
- Ball Bearing: 50,000hrs(40°C)
- Sleeve Bearing: 30,000hrs(40°C)
- Operating Temperature: -10°C~+70°C
- Storage Temperature: -40°C~+70°C



Technical Specifications

Model	Bearing Type	Rated Voltage(VDC)	Operating Voltage(VDC)	Input Current(A)	Input Power(W)	Speed (RPM)	Max Air Flow (CFM)	Max Air Flow (m³/min)	Max Static Pressure (Inch-H₂O)	Max Static Pressure (Pa)	Noise [dB(A)]	Weight (g)
LWAD4010KH-06	B.S	5	3.5~5.5	0.22	1.10	7000	7.50	0.21	0.15	36.87	32.0	16.0
LWAD4010KM-07	B.S	5	3.5~5.5	0.14	0.70	6000	6.42	0.18	0.12	29.42	27.0	16.0
LWAD4010KL-08	B.S	5	3.5~5.5	0.10	0.50	5000	5.54	0.15	0.09	21.67	24.0	16.0
LWAD4010KD-09	B.S	5	3.5~5.5	0.08	0.40	4000	4.39	0.12	0.06	14.32	21.0	16.0
LWAD4010LH-06	B.S	12	7.0~13.8	0.15	1.80	7000	7.50	0.21	0.15	36.87	32.0	16.0
LWAD4010LM-07	B.S	12	7.0~13.8	0.08	0.96	6000	6.42	0.18	0.12	29.42	27.0	16.0
LWAD4010LL-08	B.S	12	7.0~13.8	0.06	0.72	5000	5.54	0.15	0.09	21.67	24.0	16.0
LWAD4010LD-09	B.S	12	7.0~13.8	0.04	0.48	4000	4.39	0.12	0.06	14.32	21.0	16.0
LWAD4010MH-06	B.S	24	14.0~27.6	0.07	1.68	7000	7.50	0.21	0.15	36.87	32.0	16.0
LWAD4010MM-07	B.S	24	14.0~27.6	0.05	1.20	6000	6.42	0.18	0.12	29.42	27.0	16.0
LWAD4010ML-08	B.S	24	14.0~27.6	0.04	0.96	5000	5.54	0.15	0.09	21.67	24.0	16.0

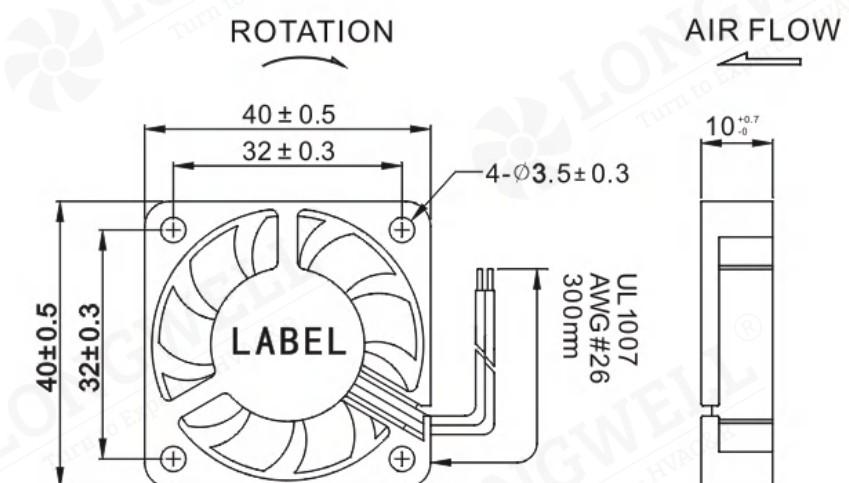

LWAD4020 Serise


Product Characteristic

- Frame: Plastic(UL94V-0)
- Impeller: Plastic(UL94V-0)
- Lead Wire: UL1007AWG#26 or Equivalent (+)Red,(-)Black
- Ball Bearing: 50,000hrs(40°C)
- Sleeve Bearing: 30,000hrs(40°C)
- Operating Temperature: -10°C~+70°C
- Storage Temperature: -40°C~+70°C



Technical Specifications

Model	Bearing Type	Rated Voltage(VDC)	Operating Voltage(VDC)	Input Current(A)	Input Power(W)	Speed (RPM)	Max Air Flow (CFM)	Max Air Flow (m³/min)	Max Static Pressure (Inch-H₂O)	Max Static Pressure (Pa)	Noise [dB(A)]	Weight (g)
LWAD4020KH-06	B.S	5	3.5~5.5	0.40	2.00	10000	10.79	0.31	0.43	106.40	38.0	24.0
LWAD4020KM-07	B.S	5	3.5~5.5	0.25	1.25	8000	8.43	0.24	0.27	68.16	35.0	24.0
LWAD4020KL-08	B.S	5	3.5~5.5	0.18	0.90	6000	6.47	0.18	0.16	39.72	27.0	24.0
LWAD4020KD-09	B.S	5	3.5~5.5	0.10	0.50	4000	3.93	0.11	0.07	17.46	23.0	24.0
LWAD4020LH-11	B.S	12	7.0~13.8	0.16	1.92	10000	10.79	0.31	0.43	106.40	38.0	24.0
LWAD4020LM-12	B.S	12	7.0~13.8	0.13	1.56	8000	8.43	0.24	0.27	68.16	35.0	24.0
LWAD4020LL-13	B.S	12	7.0~13.8	0.08	0.96	6000	6.47	0.18	0.16	39.72	27.0	24.0
LWAD4020LD-14	B.S	12	7.0~13.8	0.05	0.60	4000	3.93	0.11	0.07	17.46	23.0	24.0
LWAD4020MH-11	B.S	24	14.0~27.6	0.12	2.88	10000	10.79	0.31	0.43	106.40	38.0	24.0
LWAD4020MM-12	B.S	24	14.0~27.6	0.08	1.92	8000	8.43	0.24	0.27	68.16	35.0	24.0
LWAD4020ML-13	B.S	24	14.0~27.6	0.05	1.20	6000	6.47	0.18	0.16	39.72	27.0	24.0

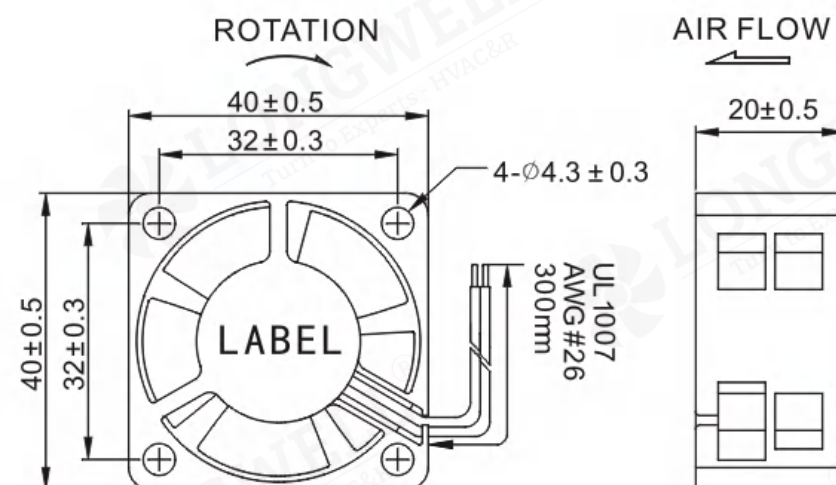

LWAD4028 Serise


Product Characteristic

- Frame: Plastic(UL94V-0)
- Impeller: Plastic(UL94V-0)
- Lead Wire: UL1007AWG#24 or Equivalent (+)Red,(-)Black
- Ball Bearing: 50,000hrs(40°C)
- Operating Temperature: -10°C~+70°C
- Storage Temperature: -40°C~+70°C



Technical Specifications

Model	Bearing Type	Rated Voltage(VDC)	Operating Voltage(VDC)	Input Current(A)	Input Power(W)	Speed (RPM)	Max Air Flow (CFM)	Max Air Flow (m³/min)	Max Static Pressure (Inch-H₂O)	Max Static Pressure (Pa)	Noise [dB(A)]	Weight (g)
LWAD4028LH-06	B	12	7.0~13.8	0.65	7.80	15000	21.45	0.61	0.98	244.77	58.0	40.0
LWAD4028LM-07	B	12	7.0~13.8	0.45	5.40	13000	18.30	0.52	0.70	175.34	50.0	40.0
LWAD4028LL-08	B	12	7.0~13.8	0.25	3.00	10000	13.40	0.38	0.42	105.42	42.0	40.0
LWAD4028LD-09	B	12	7.0~13.8	0.17	2.04	8000	10.94	0.31	0.29	73.26	39.0	40.0
LWAD4028MH-06	B	24	14.0~27.6	0.35	8.40	15000	21.45	0.61	0.98	244.77	58.0	40.0
LWAD4028MM-07	B	24	14.0~27.6	0.25	6.00	13000	18.30	0.52	0.70	175.34	50.0	40.0
LWAD4028ML-08	B	24	14.0~27.6	0.14	3.36	10000	13.40	0.38	0.42	105.42	42.0	40.0
LWAD4028MD-09	B	24	14.0~27.6	0.11	2.64	8000	10.94	0.31	0.29	73.26	39.0	40.0

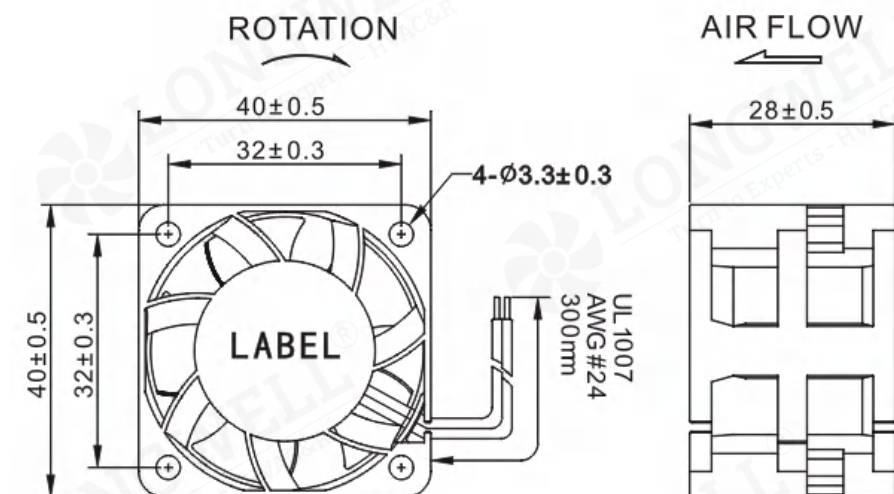

LWAD5010 Serise



Product Characteristic

- Frame: Plastic(UL94V-0)
- Impeller: Plastic(UL94V-0)
- Lead Wire: UL1007AWG#26 or Equivalent (+)Red,(-)Black
- Ball Bearing: 50,000hrs(40°C)
- Sleeve Bearing: 30,000hrs(40°C)
- Operating Temperature: -10°C~+70°C
- Storage Temperature: -40°C~+70°C



Technical Specifications

Model	Bearing Type	Rated Voltage(VDC)	Operating Voltage(VDC)	Input Current(A)	Input Power(W)	Speed (RPM)	Max Air Flow (CFM)	Max Air Flow (m³/min)	Max Static Pressure (Inch-H₂O)	Max Static Pressure (Pa)	Noise [dB(A)]	Weight (g)
LWAD5010KH-06	B.S	5	3.5~5.5	0.25	1.25	5500	10.83	0.31	0.13	33.15	34.0	20.0
LWAD5010KM-07	B.S	5	3.5~5.5	0.21	1.05	5000	9.91	0.28	0.11	26.77	31.0	20.0
LWAD5010KL-08	B.S	5	3.5~5.5	0.18	0.90	4500	9.26	0.26	0.10	23.93	28.0	20.0
LWAD5010KD-09	B.S	5	3.5~5.5	0.15	0.75	4000	7.64	0.22	0.07	17.55	26.0	20.0
LWAD5010LX-06	B.S	12	7.0~13.8	0.16	1.92	6000	12.02	0.34	0.16	39.32	37.0	20.0
LWAD5010LH-07	B.S	12	7.0~13.8	0.14	1.68	5500	10.83	0.31	0.13	33.15	34.0	20.0
LWAD5010LM-08	B.S	12	7.0~13.8	0.12	1.44	5000	9.91	0.28	0.11	26.77	31.0	20.0
LWAD5010LL-09	B.S	12	7.0~13.8	0.10	1.20	4500	9.26	0.26	0.10	23.93	28.0	20.0
LWAD5010LD-10	B.S	12	7.0~13.8	0.08	0.96	4000	7.64	0.22	0.07	17.55	26.0	20.0
LWAD5010MX-06	B.S	24	14.0~27.6	0.12	2.88	6000	12.02	0.34	0.16	39.32	37.0	20.0
LWAD5010MH-07	B.S	24	14.0~27.6	0.10	2.40	5500	10.83	0.31	0.13	33.15	34.0	20.0
LWAD5010MM-08	B.S	24	14.0~27.6	0.08	1.92	5000	9.91	0.28	0.11	26.77	31.0	20.0
LWAD5010ML-09	B.S	24	14.0~27.6	0.06	1.44	4500	9.26	0.26	0.10	23.93	28.0	20.0
LWAD5010MD-10	B.S	24	14.0~27.6	0.04	0.96	4000	7.64	0.22	0.07	17.55	26.0	20.0

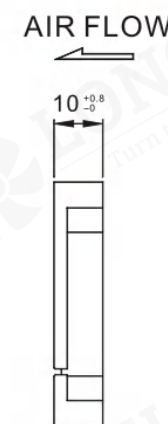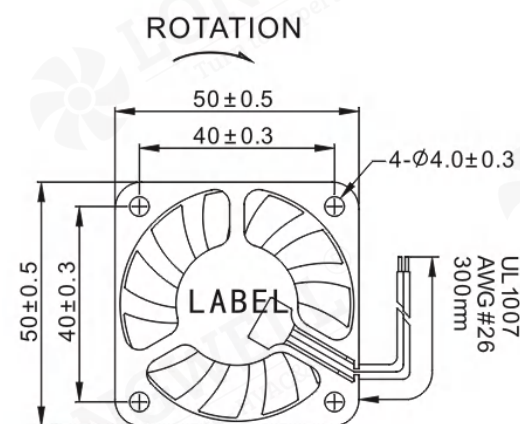

LWAD5015 Serise



Product Characteristic

- Frame: Plastic(UL94V-0)
- Impeller: Plastic(UL94V-0)
- Lead Wire: UL1007AWG#24 or Equivalent (+)Red,(-)Black
- Ball Bearing: 50,000hrs(40°C)
- Operating Temperature: -10°C~+70°C
- Storage Temperature: -40°C~+70°C



Technical Specifications

Model	Bearing Type	Rated Voltage(VDC)	Operating Voltage(VDC)	Input Current(A)	Input Power(W)	Speed (RPM)	Max Air Flow (CFM)	Max Air Flow (m³/min)	Max Static Pressure (Inch-H₂O)	Max Static Pressure (Pa)	Noise [dB(A)]	Weight (g)
LWAD5015KH-06	B.S	5	3.5~5.5	0.50	2.50	6000	14.74	0.42	0.21	52.76	34.0	29.0
LWAD5015KM-07	B.S	5	3.5~5.5	0.35	1.75	5500	13.29	0.38	0.18	45.11	31.0	29.0
LWAD5015KL-08	B.S	5	3.5~5.5	0.25	1.25	5000	12.86	0.36	0.16	40.89	27.0	29.0
LWAD5015KD-09	B.S	5	3.5~5.5	0.20	1.00	4500	11.29	0.32	0.13	32.36	25.0	29.0
LWAD5015LX-06	B.S	12	7.0~13.8	0.20	2.40	6500	15.90	0.45	0.25	62.57	36.0	29.0
LWAD5015LH-07	B.S	12	7.0~13.8	0.16	1.92	6000	14.74	0.42	0.21	52.76	34.0	29.0
LWAD5015LM-08	B.S	12	7.0~13.8	0.14	1.68	5500	13.29	0.38	0.18	45.11	31.0	29.0
LWAD5015LL-09	B.S	12	7.0~13.8	0.12	1.44	5000	12.86	0.36	0.16	40.89	27.0	29.0
LWAD5015LD-10	B.S	12	7.0~13.8	0.10	1.20	4500	11.29	0.32	0.13	32.36	25.0	29.0
LWAD5015MX-06	B.S	24	14.0~27.6	0.12	2.88	6500	15.90	0.45	0.25	62.57	36.0	29.0
LWAD5015MH-07	B.S	24	14.0~27.6	0.10	2.40	6000	14.74	0.42	0.21	52.76	34.0	29.0
LWAD5015MM-08	B.S	24	14.0~27.6	0.08	1.92	5500	13.29	0.38	0.18	45.11	31.0	29.0
LWAD5015ML-09	B.S	24	14.0~27.6	0.07	1.68	5000	12.86	0.36	0.16	40.89	27.0	29.0
LWAD5015MD-10	B.S	24	14.0~27.6	0.06	1.44	4500	11.29	0.32	0.13	32.36	25.0	29.0

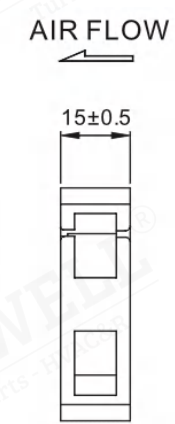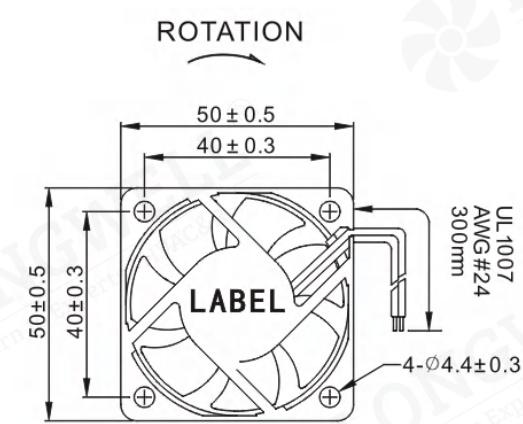

LWAD5020 Serise


Product Characteristic

- Frame: Plastic(UL94V-0)
- Impeller: Plastic(UL94V-0)
- Lead Wire: UL1007AWG#24 or Equivalent (+)Red,(-)Black
- Ball Bearing: 50,000hrs(40°C)
- Operating Temperature: -10°C~+70°C
- Storage Temperature: -40°C~+70°C



Technical Specifications

Model	Bearing Type	Rated Voltage(VDC)	Operating Voltage(VDC)	Input Current(A)	Input Power(W)	Speed (RPM)	Max Air Flow (CFM)	Max Air Flow (m³/min)	Max Static Pressure (Inch-H₂O)	Max Static Pressure (Pa)	Noise [dB(A)]	Weight (g)
LWAD5020KM-06	B.S	5	3.5~5.5	0.42	2.10	5500	15.56	0.44	0.20	49.62	31.0	32.0
LWAD5020KL-07	B.S	5	3.5~5.5	0.28	1.40	5000	14.98	0.42	0.17	42.86	29.0	32.0
LWAD5020KD-08	B.S	5	3.5~5.5	0.20	1.00	4500	13.70	0.39	0.14	34.91	26.0	32.0
LWAD5020LX-06	B.S	12	7.0~13.8	0.20	2.40	6500	19.44	0.55	0.29	72.77	36.0	32.0
LWAD5020LH-07	B.S	12	7.0~13.8	0.18	2.16	6000	17.37	0.49	0.26	63.74	33.0	32.0
LWAD5020LM-08	B.S	12	7.0~13.8	0.16	1.92	5500	15.56	0.44	0.20	49.62	31.0	32.0
LWAD5020LL-09	B.S	12	7.0~13.8	0.14	1.68	5000	14.98	0.42	0.17	42.86	29.0	32.0
LWAD5020LD-10	B.S	12	7.0~13.8	0.10	1.20	4500	13.70	0.39	0.14	34.91	26.0	32.0
LWAD5020MX-06	B.S	24	14.0~27.6	0.14	3.36	6500	19.44	0.55	0.29	72.77	36.0	32.0
LWAD5020MH-07	B.S	24	14.0~27.6	0.12	2.88	6000	17.37	0.49	0.26	63.74	33.0	32.0
LWAD5020MM-08	B.S	24	14.0~27.6	0.10	2.40	5500	15.56	0.44	0.20	49.62	31.0	32.0
LWAD5020ML-09	B.S	24	14.0~27.6	0.08	1.92	5000	14.98	0.42	0.17	42.86	29.0	32.0
LWAD5020MD-10	B.S	24	14.0~27.6	0.06	1.44	4500	13.70	0.39	0.14	34.91	26.0	32.0

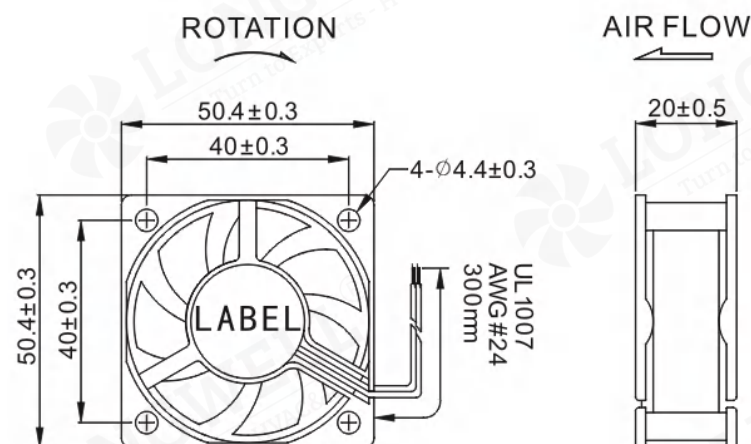

LWAD5025 Serise


Product Characteristic

- Frame: Plastic(UL94V-0)
- Impeller: Plastic(UL94V-0)
- Lead Wire: UL1007AWG#24 or Equivalent (+)Red,(-)Black
- Ball Bearing: 50,000hrs(40°C)
- Operating Temperature: -10°C~+70°C
- Storage Temperature: -40°C~+70°C



Technical Specifications

Model	Bearing Type	Rated Voltage(VDC)	Operating Voltage(VDC)	Input Current(A)	Input Power(W)	Speed (RPM)	Max Air Flow (CFM)	Max Air Flow (m³/min)	Max Static Pressure (Inch-H₂O)	Max Static Pressure (Pa)	Noise [dB(A)]	Weight (g)
LWAD5025KL-06	B.S	5	3.5~5.5	0.24	1.20	4000	11.13	0.32	0.10	25.50	27.0	35.0
LWAD5025KD-07	B.S	5	3.5~5.5	0.19	0.95	3000	7.50	0.21	0.06	14.81	23.0	35.0
LWAD5025LH-06	B.S	12	7.0~13.8	0.22	2.64	6000	17.83	0.50	0.23	56.88	37.0	35.0
LWAD5025LM-07	B.S	12	7.0~13.8	0.16	1.92	5000	14.43	0.41	0.16	40.31	31.0	35.0
LWAD5025LL-08	B.S	12	7.0~13.8	0.12	1.44	4000	11.13	0.32	0.10	25.50	27.0	35.0
LWAD5025LD-09	B.S	12	7.0~13.8	0.08	0.96	3000	7.50	0.21	0.06	14.81	23.0	35.0
LWAD5025MH-06	B.S	24	14.0~27.6	0.17	4.08	6000	17.83	0.50	0.23	56.88	37.0	35.0
LWAD5025MM-07	B.S	24	14.0~27.6	0.11	2.64	5000	14.43	0.41	0.16	40.31	31.0	35.0
LWAD5025ML-08	B.S	24	14.0~27.6	0.09	2.16	4000	11.13	0.32	0.10	25.50	27.0	35.0

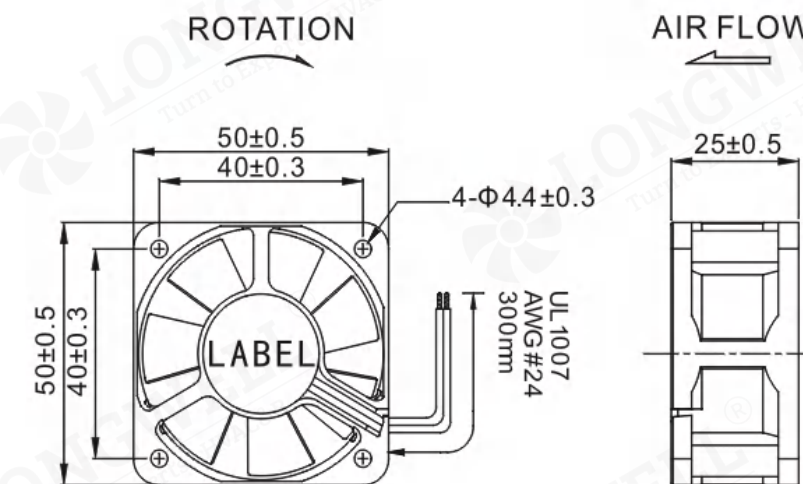

LWAD6010 Serise


Product Characteristic

- Frame: Plastic(UL94V-0)
- Impeller: Plastic(UL94V-0)
- Lead Wire: UL1007AWG#26 or Equivalent (+)Red,(-)Black
- Ball Bearing: 50,000hrs(40°C)
- Sleeve Bearing: 30,000hrs(40°C)
- Operating Temperature: -10°C~+70°C
- Storage Temperature: -40°C~+70°C



Technical Specifications

Model	Bearing Type	Rated Voltage(VDC)	Operating Voltage(VDC)	Input Current(A)	Input Power(W)	Speed (RPM)	Max Air Flow (CFM)	Max Air Flow (m³/min)	Max Static Pressure (Inch-H₂O)	Max Static Pressure (Pa)	Noise [dB(A)]	Weight (g)
LWAD6010KH-06	B.S	5	3.5~5.5	0.30	1.50	4000	14.43	0.41	0.16	40.31	32.0	26.0
LWAD6010KM-07	B.S	5	3.5~5.5	0.17	0.85	3000	11.13	0.32	0.10	25.50	25.0	26.0
LWAD6010KL-08	B.S	5	3.5~5.5	0.10	0.50	2000	7.50	0.21	0.06	14.81	22.0	26.0
LWAD6010LX-06	B.S	12	7.0~13.8	0.28	3.36	5000	17.83	0.50	0.23	56.88	35.0	26.0
LWAD6010LH-07	B.S	12	7.0~13.8	0.15	1.80	4000	14.43	0.41	0.16	40.31	32.0	26.0
LWAD6010LM-08	B.S	12	7.0~13.8	0.08	0.96	3000	11.13	0.32	0.10	25.50	25.0	26.0
LWAD6010LL-09	B.S	12	7.0~13.8	0.05	0.60	2000	7.50	0.21	0.06	14.81	22.0	26.0
LWAD6010MX-06	B.S	24	14.0~27.6	0.15	3.60	5000	17.83	0.50	0.23	56.88	35.0	26.0
LWAD6010MH-07	B.S	24	14.0~27.6	0.10	2.40	4000	14.43	0.41	0.16	40.31	32.0	26.0
LWAD6010MM-08	B.S	24	14.0~27.6	0.05	1.20	3000	11.13	0.32	0.10	25.50	25.0	26.0

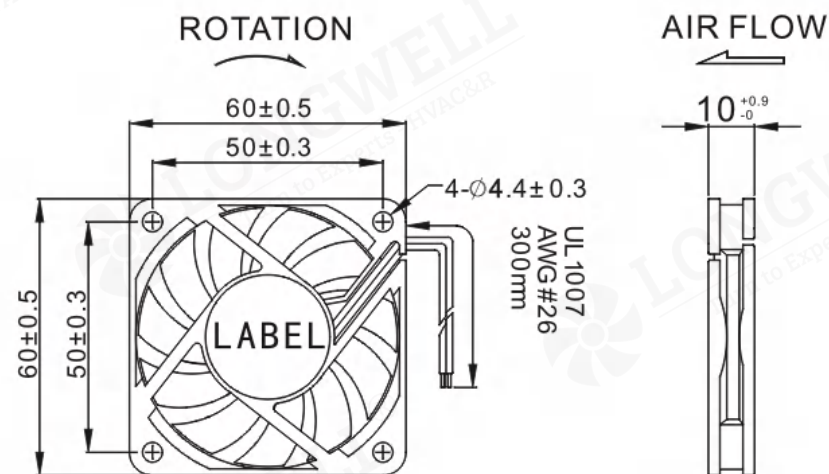

LWAD6015 Serise


Product Characteristic

- Frame: Plastic(UL94V-0)
- Impeller: Plastic(UL94V-0)
- Lead Wire: UL1007AWG#24 or Equivalent (+)Red,(-)Black
- Ball Bearing: 50,000hrs(40°C)
- Operating Temperature: -10°C~+70°C
- Storage Temperature: -40°C~+70°C



Technical Specifications

Model	Bearing Type	Rated Voltage(VDC)	Operating Voltage(VDC)	Input Current(A)	Input Power(W)	Speed (RPM)	Max Air Flow (CFM)	Max Air Flow (m³/min)	Max Static Pressure (Inch-H₂O)	Max Static Pressure (Pa)	Noise [dB(A)]	Weight (g)
LWAD6015KM-06	B.S	5	3.5~5.5	0.58	2.90	4000	18.55	0.53	0.15	37.27	29.0	42.0
LWAD6015KL-07	B.S	5	3.5~5.5	0.40	2.00	3500	16.84	0.48	0.13	31.48	26.0	42.0
LWAD6015KD-08	B.S	5	3.5~5.5	0.25	1.25	3000	12.96	0.37	0.09	21.57	24.0	42.0
LWAD6015LX-07	B.S	12	7.0~13.8	0.30	3.60	5000	22.77	0.64	0.22	55.11	37.0	42.0
LWAD6015LH-08	B.S	12	7.0~13.8	0.22	2.64	4500	19.94	0.56	0.17	43.15	33.0	42.0
LWAD6015LM-09	B.S	12	7.0~13.8	0.18	2.16	4000	18.55	0.53	0.15	37.27	29.0	42.0
LWAD6015LL-10	B.S	12	7.0~13.8	0.15	1.80	3500	16.84	0.48	0.13	31.48	26.0	42.0
LWAD6015LD-11	B.S	12	7.0~13.8	0.12	1.44	3000	12.96	0.37	0.09	21.57	24.0	42.0
LWAD6015MX-06	B.S	24	14.0~27.6	0.18	4.32	5000	22.77	0.64	0.22	55.11	37.0	42.0
LWAD6015MH-07	B.S	24	14.0~27.6	0.16	3.84	4500	19.94	0.56	0.17	43.15	33.0	42.0
LWAD6015MM-08	B.S	24	14.0~27.6	0.12	2.88	4000	18.55	0.53	0.15	37.27	29.0	42.0
LWAD6015ML-09	B.S	24	14.0~27.6	0.10	2.40	3500	16.84	0.48	0.13	31.48	26.0	42.0

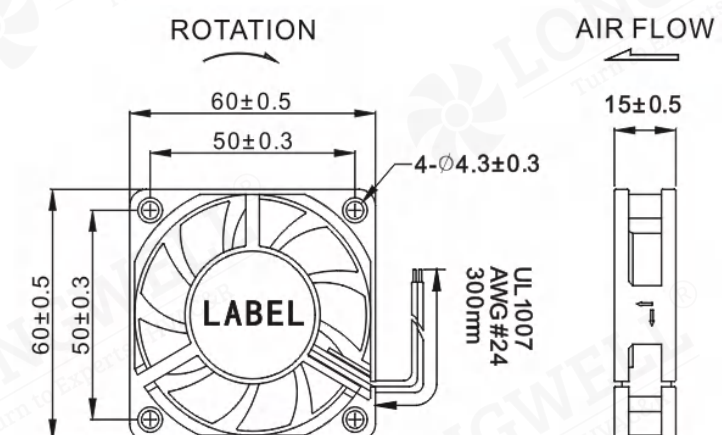

LWAD6020 Serise


Product Characteristic

- Frame: Plastic(UL94V-0)
- Impeller: Plastic(UL94V-0)
- Lead Wire: UL1007AWG#24 or Equivalent (+)Red,(-)Black
- Ball Bearing: 50,000hrs(40°C)
- Sleeve Bearing: 30,000hrs(40°C)
- Operating Temperature: -10°C~+70°C
- Storage Temperature: -40°C~+70°C



Technical Specifications

Model	Bearing Type	Rated Voltage(VDC)	Operating Voltage(VDC)	Input Current(A)	Input Power(W)	Speed (RPM)	Max Air Flow (CFM)	Max Air Flow (m³/min)	Max Static Pressure (Inch-H₂O)	Max Static Pressure (Pa)	Noise [dB(A)]	Weight (g)
LWAD6020LX-07	B.S	12	7.0~13.8	0.25	3.00	5000	23.16	0.66	0.24	58.94	34.0	52.0
LWAD6020LH-08	B.S	12	7.0~13.8	0.20	2.40	4500	21.40	0.61	0.20	48.94	31.0	52.0
LWAD6020LM-09	B.S	12	7.0~13.8	0.16	1.92	4000	18.74	0.53	0.16	38.83	28.0	52.0
LWAD6020LL-10	B.S	12	7.0~13.8	0.12	1.44	3500	16.38	0.46	0.12	29.52	25.0	52.0
LWAD6020LD-11	B.S	12	7.0~13.8	0.10	1.20	3000	13.80	0.39	0.09	22.26	23.0	52.0
LWAD6020MX-07	B.S	24	14.0~27.6	0.16	3.84	5000	23.16	0.66	0.24	58.94	34.0	52.0
LWAD6020MH-08	B.S	24	14.0~27.6	0.14	3.36	4500	21.40	0.61	0.20	48.94	31.0	52.0
LWAD6020MM-09	B.S	24	14.0~27.6	0.12	2.88	4000	18.74	0.53	0.16	38.83	28.0	52.0
LWAD6020ML-10	B.S	24	14.0~27.6	0.10	2.40	3500	16.38	0.46	0.12	29.52	25.0	52.0
LWAD6020HX-06	B.S	48	28.0~56.0	0.08	3.84	5000	23.16	0.66	0.24	58.94	34.0	52.0
LWAD6020HH-07	B.S	48	28.0~56.0	0.07	3.36	4500	21.40	0.61	0.20	48.94	31.0	52.0
LWAD6020HM-08	B.S	48	28.0~56.0	0.06	2.88	4000	18.74	0.53	0.16	38.83	28.0	52.0
LWAD6020HL-09	B.S	48	28.0~56.0	0.05	2.40	3500	16.38	0.46	0.12	29.52	25.0	52.0

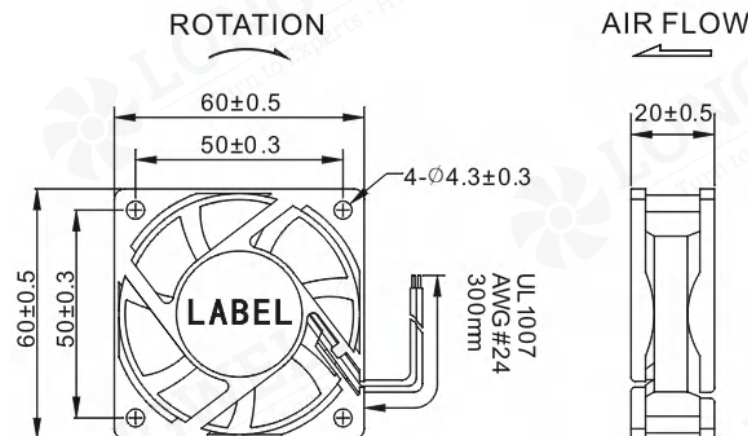

LWAD6025 Serise


Product Characteristic

- Frame: Plastic(UL94V-0)
- Impeller: Plastic(UL94V-0)
- Lead Wire: UL1007AWG#24 or Equivalent (+)Red,(-)Black
- Ball Bearing: 50,000hrs(40°C)
- Sleeve Bearing: 30,000hrs(40°C)
- Operating Temperature: -10°C~+70°C
- Storage Temperature: -40°C~+70°C



Technical Specifications

Model	Bearing Type	Rated Voltage(VDC)	Operating Voltage(VDC)	Input Current(A)	Input Power(W)	Speed (RPM)	Max Air Flow (CFM)	Max Air Flow (m³/min)	Max Static Pressure (Inch-H₂O)	Max Static Pressure (Pa)	Noise [dB(A)]	Weight (g)
LWAD6025LX-07	B.S	12	7.0~13.8	0.45	5.40	6000	29.43	0.83	0.37	91.40	45.0	56.0
LWAD6025LH-08	B.S	12	7.0~13.8	0.25	3.00	5000	24.77	0.70	0.27	67.47	38.0	56.0
LWAD6025LM-09	B.S	12	7.0~13.8	0.18	2.16	4000	19.15	0.54	0.17	42.56	32.0	56.0
LWAD6025LL-10	B.S	12	7.0~13.8	0.10	1.20	3000	14.77	0.42	0.11	26.38	27.0	56.0
LWAD6025LD-11	B.S	12	7.0~13.8	0.06	0.72	2000	9.20	0.26	0.04	10.49	23.0	56.0
LWAD6025MX-07	B.S	24	14.0~27.6	0.25	6.00	6000	29.43	0.83	0.37	91.40	45.0	56.0
LWAD6025MH-08	B.S	24	14.0~27.6	0.18	4.32	5000	24.77	0.70	0.27	67.47	38.0	56.0
LWAD6025MM-09	B.S	24	14.0~27.6	0.15	3.60	4000	19.15	0.54	0.17	42.56	32.0	56.0
LWAD6025ML-10	B.S	24	14.0~27.6	0.10	2.40	3000	14.77	0.42	0.17	26.38	27.0	56.0
LWAD6025HX-07	B.S	48	28.0~56.0	0.18	8.64	6000	29.43	0.83	0.37	91.40	45.0	56.0
LWAD6025HH-08	B.S	48	28.0~56.0	0.12	5.76	5000	24.77	0.70	0.27	67.47	38.0	56.0
LWAD6025HM-09	B.S	48	28.0~56.0	0.08	3.84	4000	19.15	0.54	0.17	42.56	32.0	56.0
LWAD6025HL-10	B.S	48	28.0~56.0	0.06	2.88	3000	14.77	0.42	0.11	26.38	27.0	56.0

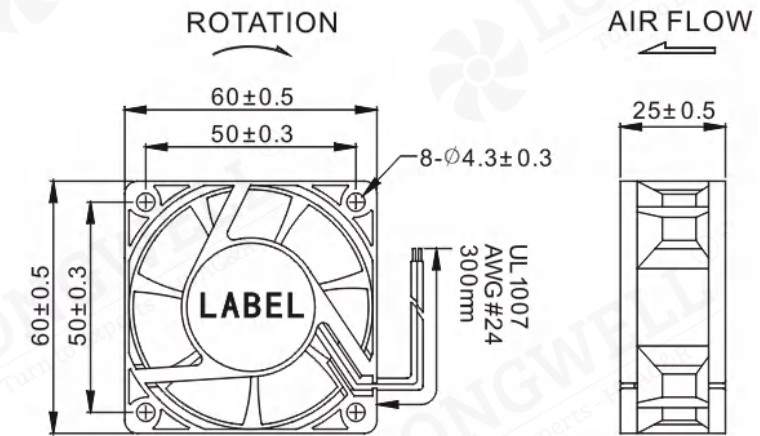

LWAD6038 Serise


Product Characteristic

- Frame: Plastic(UL94V-0)
- Impeller: Plastic(UL94V-0)
- Lead Wire: UL1007AWG#24 or Equivalent (+)Red,(-)Black
- Ball Bearing: 50,000hrs(40°C)
- Sleeve Bearing: 30,000hrs(40°C)
- Operating Temperature: -10°C~+70°C
- Storage Temperature: -40°C~+70°C



Technical Specifications

Model	Bearing Type	Rated Voltage(VDC)	Operating Voltage(VDC)	Input Current(A)	Input Power(W)	Speed (RPM)	Max Air Flow (CFM)	Max Air Flow (m³/min)	Max Static Pressure (Inch-H₂O)	Max Static Pressure (Pa)	Noise [dB(A)]	Weight (g)
LWAD6038LH-06	B	12	7.0~13.8	1.00	12.00	9000	49.91	1.41	0.90	224.67	60.0	85.0
LWAD6038LM-07	B	12	7.0~13.8	0.70	8.40	8000	44.52	1.26	0.74	183.19	55.0	85.0
LWAD6038LL-08	B	12	7.0~13.8	0.50	6.00	7000	39.02	1.11	0.57	141.90	51.0	85.0
LWAD6038LD-09	B	12	7.0~13.8	0.40	4.80	6000	33.51	0.95	0.43	106.50	47.0	85.0
LWAD6038MX-06	B	24	14.0~27.6	0.65	15.60	10000	56.68	1.61	1.15	286.06	65.0	85.0
LWAD6038MH-07	B	24	14.0~27.6	0.50	12.00	9000	49.91	1.41	0.90	224.67	60.0	85.0
LWAD6038MM-08	B	24	14.0~27.6	0.35	8.40	8000	44.52	1.26	0.74	183.19	55.0	85.0
LWAD6038ML-09	B	24	14.0~27.6	0.30	7.20	7000	39.02	1.11	0.57	141.90	51.0	85.0
LWAD6038MD-10	B	24	14.0~27.6	0.25	6.00	6000	33.51	0.95	0.43	106.50	47.0	85.0
LWAD6038HX-06	B	48	28.0~56.0	0.35	16.80	10000	56.68	1.61	1.15	286.06	65.0	85.0
LWAD6038HH-07	B	48	28.0~56.0	0.30	14.40	9000	49.91	1.41	0.90	224.67	60.0	85.0
LWAD6038HM-08	B	48	28.0~56.0	0.25	12.00	8000	44.52	1.26	0.74	183.19	55.0	85.0
LWAD6038HL-09	B	48	28.0~56.0	0.20	9.60	7000	39.02	1.11	0.57	141.90	51.0	85.0
LWAD6038HD-10	B	48	28.0~56.0	0.15	7.20	6000	33.51	0.95	0.43	106.50	47.0	85.0

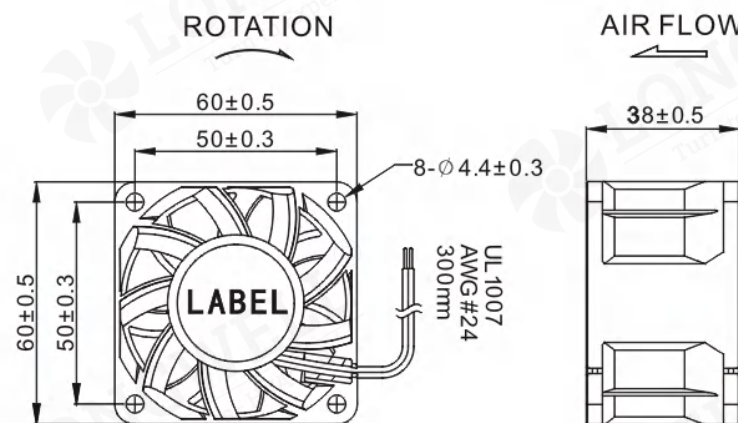

LWAD7015 Serise


Product Characteristic

- Frame: Plastic(UL94V-0)
- Impeller: Plastic(UL94V-0)
- Lead Wire: UL1007AWG#24 or Equivalent (+)Red,(-)Black
- Ball Bearing: 50,000hrs(40°C)
- Sleeve Bearing: 30,000hrs(40°C)
- Operating Temperature: -10°C~+70°C
- Storage Temperature: -40°C~+70°C



Technical Specifications

Model	Bearing Type	Rated Voltage(VDC)	Operating Voltage(VDC)	Input Current(A)	Input Power(W)	Speed (RPM)	Max Air Flow (CFM)	Max Air Flow (m³/min)	Max Static Pressure (Inch-H₂O)	Max Static Pressure (Pa)	Noise [dB(A)]	Weight (g)
LWAD7015LX-06	B.S	12	7.0~13.8	0.45	5.40	4500	34.95	0.99	0.21	51.98	41.0	48.0
LWAD7015LH-07	B.S	12	7.0~13.8	0.40	4.80	4000	31.28	0.89	0.16	40.99	36.0	48.0
LWAD7015LM-08	B.S	12	7.0~13.8	0.30	3.60	3500	28.48	0.81	0.14	34.72	33.0	48.0
LWAD7015LL-09	B.S	12	7.0~13.8	0.20	2.40	3000	23.95	0.68	0.10	25.20	28.0	48.0
LWAD7015LD-10	B.S	12	7.0~13.8	0.15	1.80	2500	17.45	0.49	0.05	13.53	26.0	48.0
LWAD7015MX-06	B.S	24	14.0~27.6	0.30	7.20	4500	34.95	0.99	0.21	51.98	41.0	48.0
LWAD7015MH-07	B.S	24	14.0~27.6	0.28	6.72	4000	31.28	0.89	0.16	40.99	36.0	48.0
LWAD7015MM-08	B.S	24	14.0~27.6	0.25	6.00	3500	28.48	0.81	0.14	34.72	33.0	48.0
LWAD7015ML-09	B.S	24	14.0~27.6	0.20	4.80	3000	23.95	0.68	0.10	25.20	28.0	48.0
LWAD7015MD-10	B.S	24	14.0~27.6	0.15	3.60	2500	17.45	0.49	0.05	13.53	26.0	48.0

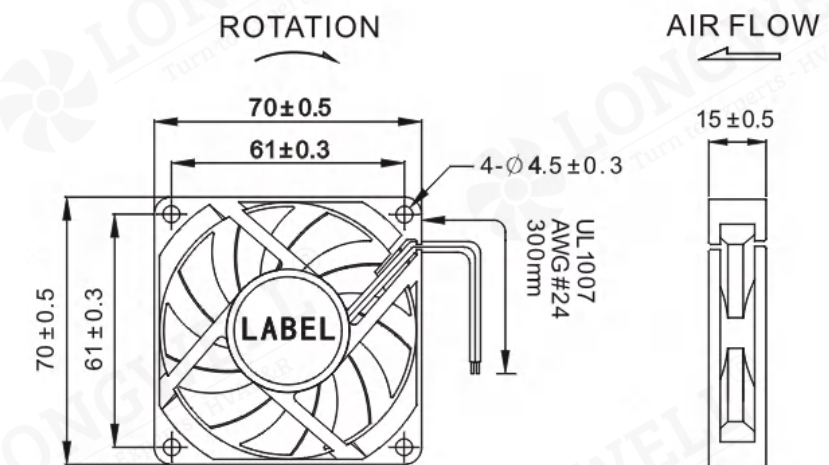

LWAD7025 Serise


Product Characteristic

- Frame: Plastic(UL94V-0)
- Impeller: Plastic(UL94V-0)
- Lead Wire: UL1007AWG#24 or Equivalent (+)Red,(-)Black
- Ball Bearing: 50,000hrs(40°C)
- Sleeve Bearing: 30,000hrs(40°C)
- Operating Temperature: -10°C~+70°C
- Storage Temperature: -40°C~+70°C



Technical Specifications

Model	Bearing Type	Rated Voltage(VDC)	Operating Voltage(VDC)	Input Current(A)	Input Power(W)	Speed (RPM)	Max Air Flow (CFM)	(m³/min)	Max Static Pressure (Inch-H₂O)	(Pa)	Noise [dB(A)]	Weight (g)
LWAD7025LX-06	B.S	12	7.0~13.8	0.30	3.60	4500	33.57	0.95	0.24	59.43	42.0	52.0
LWAD7025LH-07	B.S	12	7.0~13.8	0.25	3.00	4000	31.01	0.88	0.21	52.66	37.0	52.0
LWAD7025LM-08	B.S	12	7.0~13.8	0.20	2.40	3500	27.93	0.79	0.17	42.86	32.0	52.0
LWAD7025LL-09	B.S	12	7.0~13.8	0.15	1.80	3000	23.02	0.65	0.13	31.28	28.0	52.0
LWAD7025MX-06	B.S	24	14.0~27.6	0.20	4.80	4500	33.57	0.95	0.24	59.43	42.0	52.0
LWAD7025MH-07	B.S	24	14.0~27.6	0.16	3.84	4000	31.01	0.88	0.21	52.66	37.0	52.0
LWAD7025MM-08	B.S	24	14.0~27.6	0.12	2.88	3500	27.93	0.79	0.17	42.86	32.0	52.0
LWAD7025ML-09	B.S	24	14.0~27.6	0.08	1.92	3000	23.02	0.65	0.13	31.28	28.0	52.0
LWAD7025HX-06	B.S	48	28.0~56.0	0.07	3.36	4500	33.57	0.95	0.24	59.43	42.0	52.0
LWAD7025HH-07	B.S	48	28.0~56.0	0.05	2.40	4000	31.01	0.88	0.21	52.66	37.0	52.0
LWAD7025HM-08	B.S	48	28.0~56.0	0.04	1.92	3500	27.93	0.79	0.17	42.86	32.0	52.0
LWAD7025HL-09	B.S	48	28.0~56.0	0.03	1.44	3000	23.02	0.65	0.13	31.28	28.0	52.0

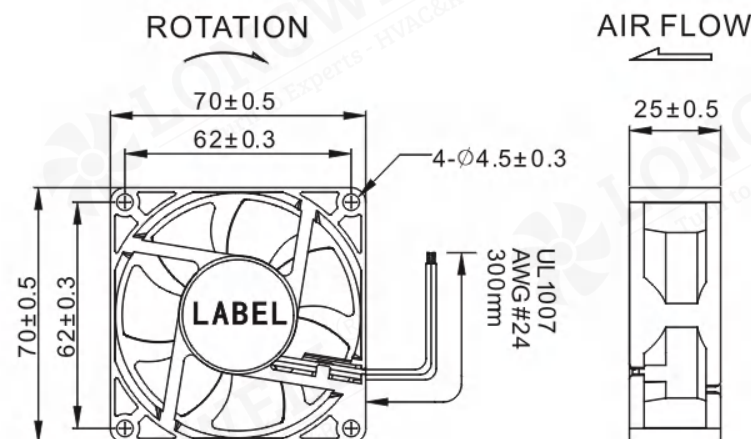

LWAD8015 Serise


Product Characteristic

- Frame: Plastic(UL94V-0)
- Impeller: Plastic(UL94V-0)
- Lead Wire: UL1007AWG#24 or Equivalent (+)Red,(-)Black
- Ball Bearing: 50,000hrs(40°C)
- Sleeve Bearing: 30,000hrs(40°C)
- Operating Temperature: -10°C~+70°C
- Storage Temperature: -40°C~+70°C



Technical Specifications

Model	Bearing Type	Rated Voltage(VDC)	Operating Voltage(VDC)	Input Current(A)	Input Power(W)	Speed (RPM)	Max Air Flow (CFM)	(m³/min)	Max Static Pressure (Inch-H₂O)	(Pa)	Noise [dB(A)]	Weight (g)
LWAD8015KM-06	B.S	5	3.5~5.5	0.38	1.90	2500	27.45	0.78	0.08	18.73	27.0	54.0
LWAD8015KL-07	B.S	5	3.5~5.5	0.25	1.25	2000	22.07	0.63	0.05	12.55	23.0	54.0
LWAD8015LH-06	B.S	12	7.0~13.8	0.30	3.60	3000	34.33	0.97	0.11	27.16	33.0	54.0
LWAD8015LM-07	B.S	12	7.0~13.8	0.20	2.40	2500	27.45	0.78	0.08	18.73	27.0	54.0
LWAD8015LL-08	B.S	12	7.0~13.8	0.12	1.44	2000	22.07	0.63	0.05	12.55	23.0	54.0
LWAD8015MH-06	B.S	24	14.0~27.6	0.18	4.32	3000	34.33	0.97	0.11	27.16	33.0	54.0
LWAD8015MM-07	B.S	24	14.0~27.6	0.15	3.60	2500	27.45	0.78	0.08	18.73	27.0	54.0
LWAD8015ML-08	B.S	24	14.0~27.6	0.10	2.40	2000	22.07	0.63	0.05	12.55	23.0	54.0

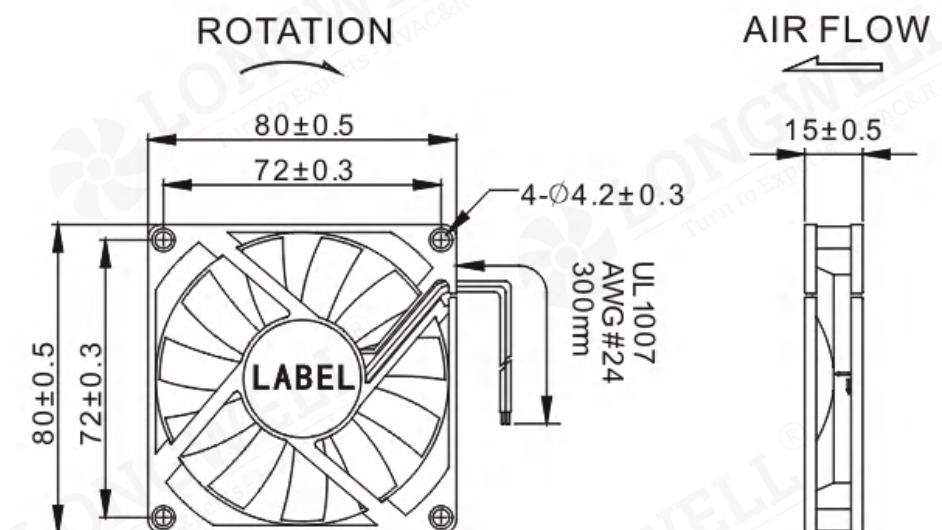

LWAD8020 Serise



Product Characteristic

- Frame: Plastic(UL94V-0)
- Impeller: Plastic(UL94V-0)
- Lead Wire: UL1007AWG#24 or Equivalent (+)Red,(-)Black
- Ball Bearing: 50,000hrs(40°C)
- Sleeve Bearing: 30,000hrs(40°C)
- Operating Temperature: -10°C~+70°C
- Storage Temperature: -40°C~+70°C



Technical Specifications

Model	Bearing Type	Rated Voltage(VDC)	Operating Voltage(VDC)	Input Current(A)	Input Power(W)	Speed (RPM)	Max Air Flow (CFM)	(m³/min)	Max Static Pressure (Inch-H₂O)	(Pa)	Noise [dB(A)]	Weight (g)
LWAD8020LX-06	B.S	12	7.0~13.8	0.35	4.20	3500	40.31	1.14	0.14	34.52	35.0	58.0
LWAD8020LH-07	B.S	12	7.0~13.8	0.25	3.00	3000	35.09	0.99	0.11	26.67	31.0	58.0
LWAD8020LM-08	B.S	12	7.0~13.8	0.18	2.16	2500	30.72	0.87	0.08	21.08	25.0	58.0
LWAD8020LL-09	B.S	12	7.0~13.8	0.13	1.56	2000	25.44	0.72	0.06	15.10	22.0	58.0
LWAD8020MX-06	B.S	24	14.0~27.6	0.18	4.32	3500	40.31	1.14	0.14	34.52	35.0	58.0
LWAD8020MH-07	B.S	24	14.0~27.6	0.14	3.36	3000	35.09	0.99	0.11	26.67	31.0	58.0
LWAD8020MM-08	B.S	24	14.0~27.6	0.10	2.40	2500	30.72	0.87	0.08	21.08	25.0	58.0
LWAD8020ML-09	B.S	24	14.0~27.6	0.07	1.68	2000	25.44	0.72	0.06	15.10	22.0	58.0
LWAD8020HX-06	B.S	48	28.0~56.0	0.08	3.84	3500	40.31	1.14	0.14	34.52	35.0	58.0
LWAD8020HH-07	B.S	48	28.0~56.0	0.05	2.40	3000	35.09	0.99	0.11	26.67	31.0	58.0
LWAD8020HM-08	B.S	48	28.0~56.0	0.04	1.92	2500	30.72	0.87	0.08	21.08	25.0	58.0
LWAD8020HL-09	B.S	48	28.0~56.0	0.02	0.96	2000	25.44	0.72	0.06	15.10	22.0	58.0

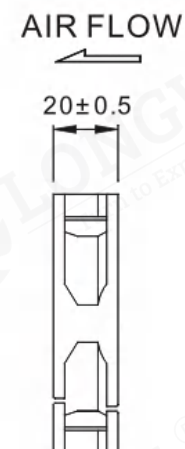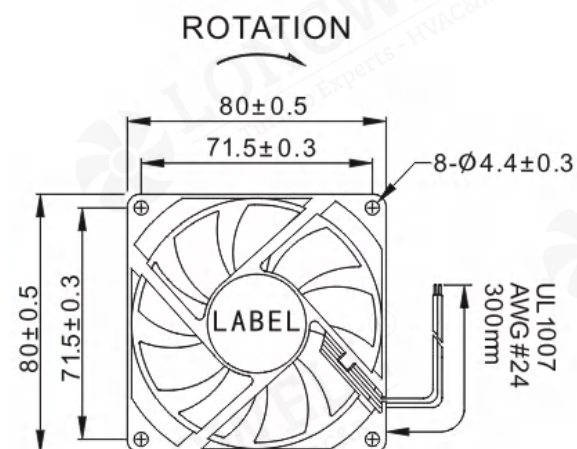

LWAD8025 Serise



Product Characteristic

- Frame: Plastic(UL94V-0)
- Impeller: Plastic(UL94V-0)
- Lead Wire: UL1007AWG#24 or Equivalent (+)Red,(-)Black
- Ball Bearing: 50,000hrs(40°C)
- Sleeve Bearing: 30,000hrs(40°C)
- Operating Temperature: -10°C~+70°C
- Storage Temperature: -40°C~+70°C



Technical Specifications

Model	Bearing Type	Rated Voltage(VDC)	Operating Voltage(VDC)	Input Current(A)	Input Power(W)	Speed (RPM)	Max Air Flow (CFM)	(m³/min)	Max Static Pressure (Inch-H₂O)	(Pa)	Noise [dB(A)]	Weight (g)
LWAD8025LX-20	B.S	12	7.0~13.8	0.50	6.00	4000	54.14	1.53	0.25	62.37	40.0	58.0
LWAD8025LH-21	B.S	12	7.0~13.8	0.40	4.80	3500	50.35	1.43	0.22	54.82	36.0	58.0
LWAD8025LM-22	B.S	12	7.0~13.8	0.30	3.60	3000	39.98	1.13	0.14	34.81	31.0	58.0
LWAD8025LL-23	B.S	12	7.0~13.8	0.20	2.40	2500	35.67	1.01	0.11	27.65	25.0	58.0
LWAD8025LD-24	B.S	12	7.0~13.8	0.10	1.20	2000	27.39	0.78	0.07	18.14	22.0	58.0
LWAD8025MX-22	B.S	24	14.0~27.6	0.40	9.60	4000	54.14	1.53	0.25	62.37	40.0	58.0
LWAD8025MH-23	B.S	24	14.0~27.6	0.30	7.20	3500	50.35	1.43	0.22	54.82	36.0	58.0
LWAD8025MM-24	B.S	24	14.0~27.6	0.20	4.80	3000	39.98	1.13	0.14	34.81	31.0	58.0
LWAD8025ML-25	B.S	24	14.0~27.6	0.15	3.60	2500	35.67	1.01	0.11	27.65	25.0	58.0
LWAD8025MD-26	B.S	24	28.0~56.0	0.10	2.40	2000	27.39	0.78	0.07	18.14	22.0	58.0
LWAD8025HX-20	B.S	48	28.0~56.0	0.30	14.40	4000	54.14	1.53	0.25	62.37	40.0	58.0
LWAD8025HH-21	B.S	48	28.0~56.0	0.25	12.00	3500	50.35	1.43	0.22	54.82	36.0	58.0
LWAD8025HM-22	B.S	48	28.0~56.0	0.20	9.60	3000	39.98	1.13	0.14	34.81	31.0	58.0
LWAD8025HL-23	B.S	48	28.0~56.0	0.15	7.20	2500	35.67	1.01	0.11	27.65	25.0	58.0

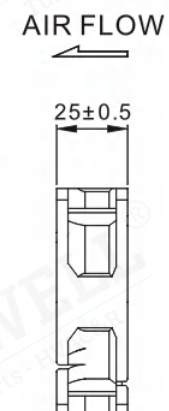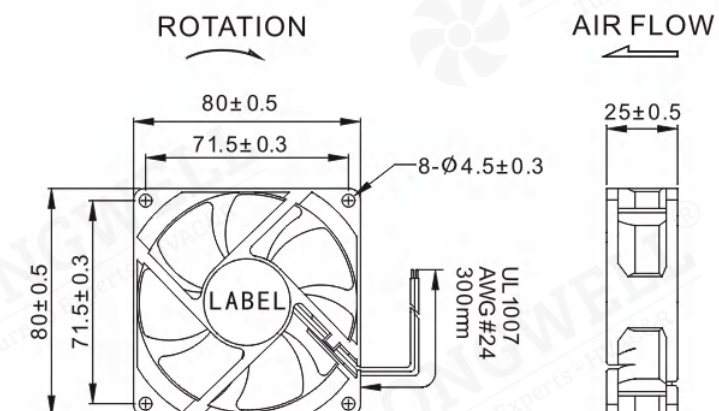

LWAD8032 Serise


Product Characteristic

- Frame: Plastic(UL94V-0)
- Impeller: Plastic(UL94V-0)
- Lead Wire: UL1007AWG#24 or Equivalent (+)Red,(-)Black
- Ball Bearing: 50,000hrs(40°C)
- Sleeve Bearing: 30,000hrs(40°C)
- Operating Temperature: -10°C~+70°C
- Storage Temperature: -40°C~+70°C



Technical Specifications

Model	Bearing Type	Rated Voltage(VDC)	Operating Voltage(VDC)	Input Current(A)	Input Power(W)	Speed (RPM)	Max Air Flow (CFM)	(m³/min)	Max Static Pressure (Inch-H₂O)	(Pa)	Noise [dB(A)]	Weight (g)
LWAD8032LX-01	B	12	7.0~13.8	1.50	18.00	6500	79.70	2.26	0.84	208.39	51.0	95.0
LWAD8032LH-02	B	12	7.0~13.8	0.90	10.80	5500	67.37	1.91	0.58	144.45	45.0	95.0
LWAD8032LM-03	B	12	7.0~13.8	0.60	7.20	4500	54.99	1.56	0.41	101.89	40.0	95.0
LWAD8032LL-04	B	12	7.0~13.8	0.40	4.80	3500	43.01	1.22	0.25	62.66	34.0	95.0
LWAD8032MX-01	B	24	14.0~27.6	0.80	19.20	6500	79.70	2.26	0.84	208.39	51.0	95.0
LWAD8032MH-02	B	24	14.0~27.6	0.50	12.00	5500	67.37	1.91	0.58	144.45	45.0	95.0
LWAD8032MM-03	B	24	14.0~27.6	0.30	7.20	4500	54.99	1.56	0.41	101.89	40.0	95.0
LWAD8032ML-04	B	24	14.0~27.6	0.20	4.80	3500	43.01	1.22	0.25	62.66	34.0	95.0
LWAD8032HX-01	B	48	28.0~56.0	0.50	24.00	6500	79.70	2.26	0.84	208.39	51.0	95.0
LWAD8032HH-02	B	48	28.0~56.0	0.30	14.40	5500	67.37	1.91	0.58	144.45	45.0	95.0
LWAD8032HM-03	B	48	28.0~56.0	0.20	9.60	4500	54.99	1.56	0.41	101.89	40.0	95.0
LWAD8032HL-04	B	48	28.0~56.0	0.10	4.80	3500	43.01	1.22	0.25	62.66	34.0	95.0

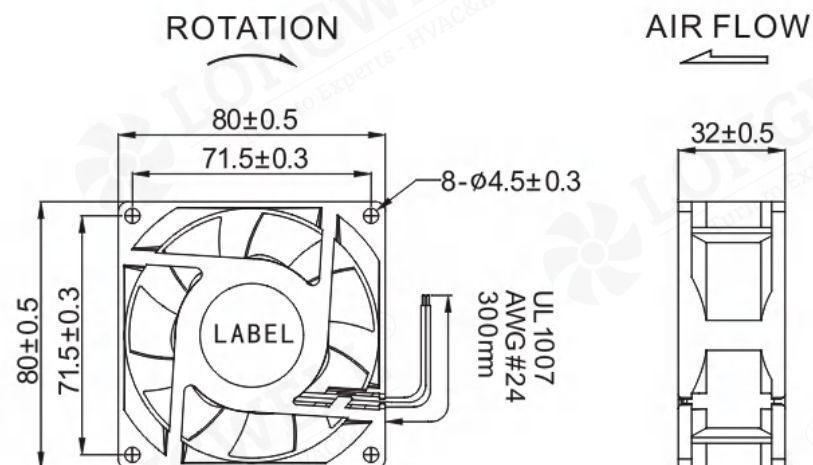

LWAD8038 Serise


Product Characteristic

- Frame: Plastic(UL94V-0)
- Impeller: Plastic(UL94V-0)
- Lead Wire: UL1007AWG#24 or Equivalent (+)Red,(-)Black
- Ball Bearing: 50,000hrs(40°C)
- Sleeve Bearing: 30,000hrs(40°C)
- Operating Temperature: -10°C~+70°C
- Storage Temperature: -40°C~+70°C



Technical Specifications

Model	Bearing Type	Rated Voltage(VDC)	Operating Voltage(VDC)	Input Current(A)	Input Power(W)	Speed (RPM)	Max Air Flow (CFM)	(m³/min)	Max Static Pressure (Inch-H₂O)	(Pa)	Noise [dB(A)]	Weight (g)
LWAD8038LX-13	B	12	7.0~13.8	1.50	18.00	6500	90.60	2.57	0.99	245.56	59.0	153.0
LWAD8038LH-14	B	12	7.0~13.8	0.90	10.80	5500	74.46	2.11	0.68	168.48	53.0	153.0
LWAD8038LM-15	B	12	7.0~13.8	0.60	7.20	4500	60.08	1.70	0.46	114.74	47.0	153.0
LWAD8038LL-16	B	12	7.0~13.8	0.40	4.80	3500	45.11	1.28	0.26	65.70	43.0	153.0
LWAD8038MX-13	B	24	14.0~27.6	0.80	19.20	6500	90.60	2.57	0.99	245.56	59.0	153.0
LWAD8038MH-14	B	24	14.0~27.6	0.50	12.00	5500	74.46	2.11	0.68	168.48	53.0	153.0
LWAD8038MM-15	B	24	14.0~27.6	0.30	7.20	4500	60.08	1.70	0.46	114.74	47.0	153.0
LWAD8038ML-16	B	24	14.0~27.6	0.20	4.80	3500	45.11	1.28	0.26	65.70	43.0	153.0
LWAD8038HX-13	B	48	28.0~56.0	0.50	24.00	6500	90.60	2.57	0.99	245.56	59.0	153.0
LWAD8038HH-14	B	48	28.0~56.0	0.30	14.40	5500	74.46	2.11	0.68	168.48	53.0	153.0
LWAD8038HM-15	B	48	28.0~56.0	0.20	9.60	4500	60.08	1.70	0.46	114.74	47.0	153.0
LWAD8038HL-16	B	48	28.0~56.0	0.10	4.80	3500	45.11	1.28	0.26	65.70	43.0	153.0

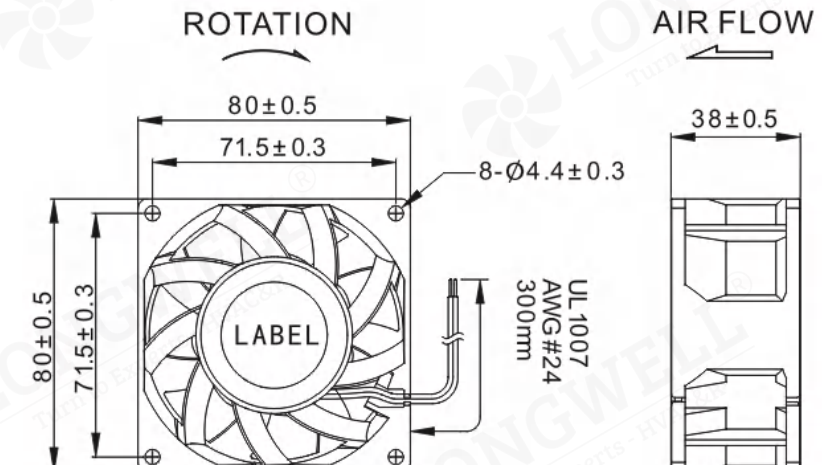

LWAD9225 Serise


Product Characteristic

- Frame: Plastic(UL94V-0)
- Impeller: Plastic(UL94V-0)
- Lead Wire: UL1007AWG#24 or Equivalent (+)Red,(-)Black
- Ball Bearing: 50,000hrs(40°C)
- Sleeve Bearing: 30,000hrs(40°C)
- Operating Temperature: -10°C~+70°C
- Storage Temperature: -40°C~+70°C



Technical Specifications

Model	Bearing Type	Rated Voltage(VDC)	Operating Voltage(VDC)	Input Current(A)	Input Power(W)	Speed (RPM)	Max Air Flow (CFM)	(m³/min)	Max Static Pressure (Inch-H₂O)	(Pa)	Noise [dB(A)]	Weight (g)
LWAD9225LX-17	B.S	12	7.0~13.8	0.60	7.20	4000	63.73	1.80	0.22	55.80	47.0	78.0
LWAD9225LH-18	B.S	12	7.0~13.8	0.50	6.00	3500	54.98	1.56	0.18	43.74	41.0	78.0
LWAD9225LM-19	B.S	12	7.0~13.8	0.40	4.80	3000	46.23	1.31	0.13	31.68	37.0	78.0
LWAD9225LL-20	B.S	12	7.0~13.8	0.30	3.60	2500	37.93	1.07	0.09	22.95	31.0	78.0
LWAD9225LD-21	B.S	12	7.0~13.8	0.20	2.40	2000	30.96	0.88	0.06	16.18	25.0	78.0
LWAD9225MX-15	B.S	24	14.0~27.6	0.50	12.00	4000	63.73	1.80	0.22	55.80	47.0	78.0
LWAD9225MH-16	B.S	24	14.0~27.6	0.40	9.60	3500	54.98	1.56	0.18	43.74	41.0	78.0
LWAD9225MM-17	B.S	24	14.0~27.6	0.30	7.20	3000	46.23	1.31	0.13	31.68	37.0	78.0
LWAD9225ML-18	B.S	24	14.0~27.6	0.20	4.80	2500	37.93	1.07	0.09	22.95	31.0	78.0
LWAD9225MD-19	B.S	24	14.0~27.6	0.15	3.60	2000	30.96	0.88	0.06	16.18	25.0	78.0
LWAD9225HX-15	B.S	48	28.0~56.0	0.40	19.20	4000	63.73	1.80	0.22	55.80	47.0	78.0
LWAD9225HH-16	B.S	48	28.0~56.0	0.25	12.00	3500	54.98	1.56	0.18	43.74	41.0	78.0
LWAD9225HM-17	B.S	48	28.0~56.0	0.20	9.60	3000	46.23	1.31	0.13	31.68	37.0	78.0
LWAD9225HL-18	B.S	48	28.0~56.0	0.15	7.20	2500	37.93	1.07	0.09	22.95	31.0	78.0

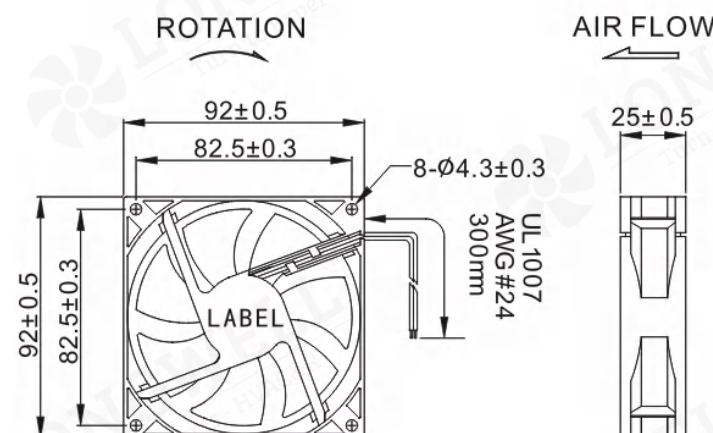

LWAD9232 Serise


Product Characteristic

- Frame: Plastic(UL94V-0)
- Impeller: Plastic(UL94V-0)
- Lead Wire: UL1007AWG#24 or Equivalent (+)Red,(-)Black
- Ball Bearing: 50,000hrs(40°C)
- Sleeve Bearing: 30,000hrs(40°C)
- Operating Temperature: -10°C~+70°C
- Storage Temperature: -40°C~+70°C



Technical Specifications

Model	Bearing Type	Rated Voltage(VDC)	Operating Voltage(VDC)	Input Current(A)	Input Power(W)	Speed (RPM)	Max Air Flow (CFM)	(m³/min)	Max Static Pressure (Inch-H₂O)	(Pa)	Noise [dB(A)]	Weight (g)
LWAD9232LX-02	B	12	7.0~13.8	2.50	30.00	6000	123.72	3.50	0.93	231.44	59.0	150.0
LWAD9232LH-03	B	12	7.0~13.8	1.80	21.60	5500	113.08	3.20	0.76	189.66	55.0	150.0
LWAD9232LM-04	B	12	7.0~13.8	1.20	14.40	5000	105.67	2.99	0.69	171.13	52.0	150.0
LWAD9232LL-05	B	12	7.0~13.8	0.90	10.80	4500	92.01	2.61	0.53	132.00	49.0	150.0
LWAD9232MX-03	B	24	14.0~27.6	1.50	36.00	6000	123.72	3.50	0.93	231.44	59.0	150.0
LWAD9232MH-04	B	24	14.0~27.6	1.00	24.00	5500	113.08	3.20	0.76	189.66	55.0	150.0
LWAD9232MM-05	B	24	14.0~27.6	0.80	19.20	5000	105.67	2.99	0.69	171.13	52.0	150.0
LWAD9232ML-06	B	24	14.0~27.6	0.60	14.40	4500	92.01	2.61	0.53	132.00	49.0	150.0
LWAD9232HX-01	B	48	28.0~56.0	0.80	38.40	6000	123.72	3.50	0.93	231.44	59.0	150.0
LWAD9232HH-02	B	48	28.0~56.0	0.50	24.00	5500	113.08	3.20	0.76	189.66	55.0	150.0
LWAD9232HM-03	B	48	28.0~56.0	0.40	19.20	5000	105.67	2.99	0.69	171.13	52.0	150.0
LWAD9232HL-04	B	48	28.0~56.0	0.30	14.40	4500	92.01	2.61	0.53	132.00	49.0	150.0

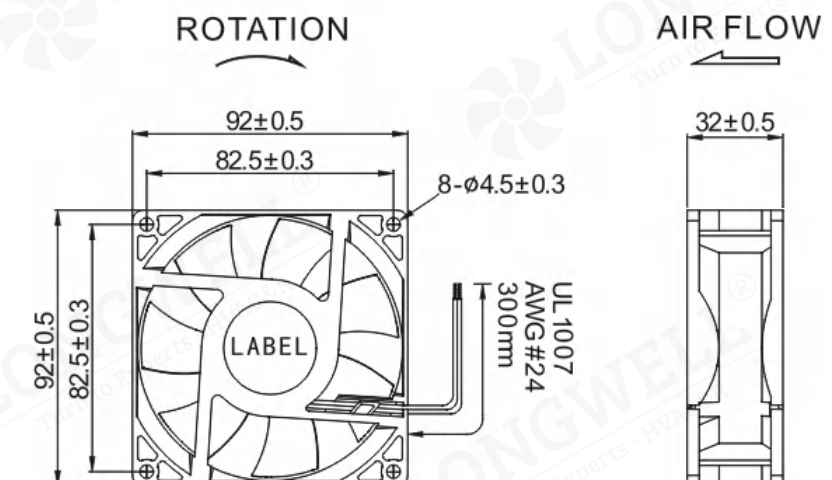

LWAD9238 Serise


Product Characteristic

- Frame: Plastic(UL94V-0)
- Impeller: Plastic(UL94V-0)
- Lead Wire: UL1007AWG#24 or Equivalent (+)Red,(-)Black
- Ball Bearing: 50,000hrs(40°C)
- Sleeve Bearing: 30,000hrs(40°C)
- Operating Temperature: -10°C~+70°C
- Storage Temperature: -40°C~+70°C



Technical Specifications

Model	Bearing Type	Rated Voltage(VDC)	Operating Voltage(VDC)	Input Current(A)	Input Power(W)	Speed (RPM)	Max Air Flow (CFM)	Max Air Flow (m³/min)	Max Static Pressure (Inch-H₂O)	Max Static Pressure (Pa)	Noise [dB(A)]	Weight (g)
LWAD9238LX-10	B	12	7.0~13.8	2.00	24.00	6000	125.10	3.54	0.93	231.35	63.0	245.0
LWAD9238LH-11	B	12	7.0~13.8	1.60	19.20	5000	101.92	2.89	0.82	204.18	55.0	245.0
LWAD9238LM-12	B	12	7.0~13.8	1.30	15.60	4000	83.31	2.36	0.61	151.89	52.0	245.0
LWAD9238LL-13	B	12	7.0~13.8	1.10	13.20	3000	67.23	1.90	0.44	109.56	49.0	245.0
LWAD9238MX-09	B	24	14.0~27.6	1.00	24.00	6000	125.10	3.54	0.93	231.35	63.0	245.0
LWAD9238MH-10	B	24	14.0~27.6	0.80	19.20	5000	101.92	2.89	0.82	204.18	55.0	245.0
LWAD9238MM-11	B	24	14.0~27.6	0.60	14.40	4000	83.31	2.36	0.61	151.89	52.0	245.0
LWAD9238ML-12	B	24	14.0~27.6	0.50	12.00	3000	67.23	1.90	0.44	109.56	49.0	245.0
LWAD9238HX-10	B	48	28.0~56.0	0.50	24.00	6000	125.10	3.54	0.93	231.35	63.0	245.0
LWAD9238HH-11	B	48	28.0~56.0	0.40	19.20	5000	101.92	2.89	0.82	204.18	55.0	245.0
LWAD9238HM-12	B	48	28.0~56.0	0.30	14.40	4000	83.31	2.36	0.61	151.89	52.0	245.0
LWAD9238HL-13	B	48	28.0~56.0	0.25	12.00	3000	67.23	1.90	0.44	109.56	49.0	245.0

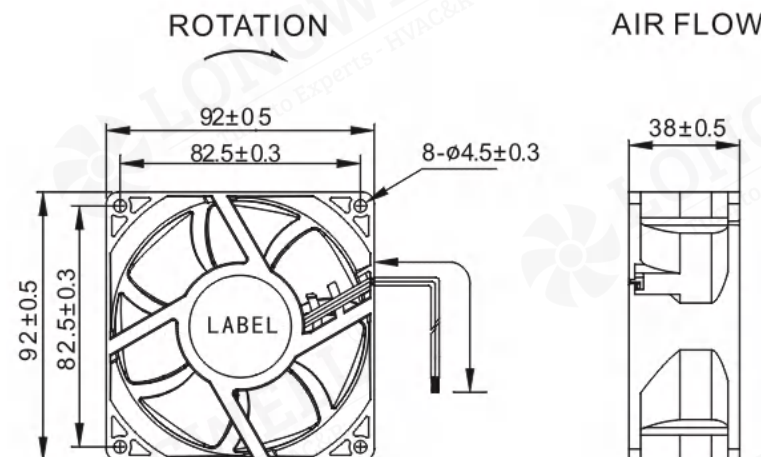

LWAD9238 Serise


Product Characteristic

- Frame: Plastic(UL94V-0)
- Impeller: Plastic(UL94V-0)
- Lead Wire: UL1007AWG#24 or Equivalent (+)Red,(-)Black
- Ball Bearing: 50,000hrs(40°C)
- Sleeve Bearing: 30,000hrs(40°C)
- Operating Temperature: -10°C~+70°C
- Storage Temperature: -40°C~+70°C



Technical Specifications

Model	Bearing Type	Rated Voltage(VDC)	Operating Voltage(VDC)	Input Current(A)	Input Power(W)	Speed (RPM)	Max Air Flow (CFM)	Max Air Flow (m³/min)	Max Static Pressure (Inch-H₂O)	Max Static Pressure (Pa)	Noise [dB(A)]	Weight (g)
LWAD9238LX-14	B	12	7.0~13.8	2.50	30.00	6000	139.87	3.96	0.96	238.79	61.0	166.0
LWAD9238LH-15	B	12	7.0~13.8	1.80	21.60	5500	124.56	3.53	0.79	196.23	56.0	166.0
LWAD9238LM-16	B	12	7.0~13.8	1.20	14.40	5000	115.09	3.26	0.71	176.52	50.0	166.0
LWAD9238LL-17	B	12	7.0~13.8	0.90	10.80	4500	102.73	2.91	0.58	145.04	45.0	166.0
LWAD9238MX-13	B	24	14.0~27.6	1.50	36.00	6000	139.87	3.96	0.96	238.79	61.0	166.0
LWAD9238MH-14	B	24	14.0~27.6	1.00	24.00	5500	124.56	3.53	0.79	196.23	56.0	166.0
LWAD9238MM-15	B	24	14.0~27.6	0.80	19.20	5000	115.09	3.26	0.71	176.52	50.0	166.0
LWAD9238ML-16	B	24	14.0~27.6	0.60	14.40	4500	102.73	2.91	0.58	145.04	45.0	166.0
LWAD9238HX-14	B	48	28.0~56.0	0.80	38.40	6000	139.87	3.96	0.96	238.79	61.0	166.0
LWAD9238HH-15	B	48	28.0~56.0	0.60	28.80	5500	124.56	3.53	0.79	196.23	56.0	166.0
LWAD9238HM-16	B	48	28.0~56.0	0.40	19.20	5000	115.09	3.26	0.71	176.52	50.0	166.0
LWAD9238HL-17	B	48	28.0~56.0	0.30	14.40	4500	102.73	2.91	0.58	145.04	45.0	166.0

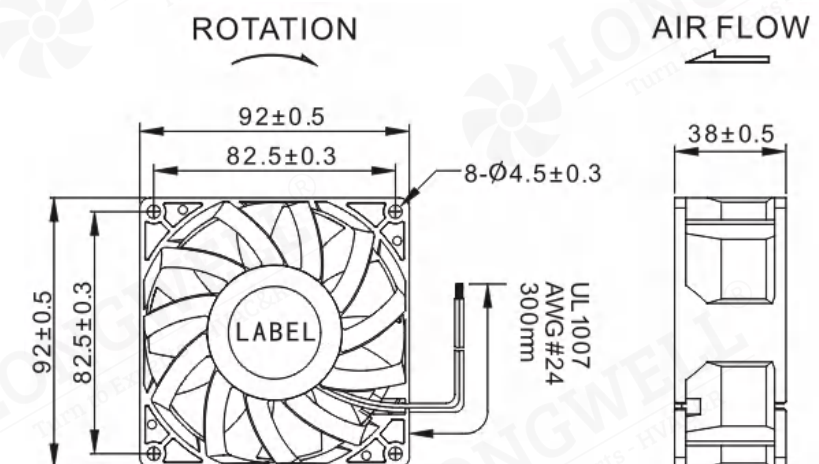

LWAD12025 Serise


Product Characteristic

- Frame: Plastic(UL94V-0)
- Impeller: Plastic(UL94V-0)
- Lead Wire: UL1007AWG#24 or Equivalent (+)Red,(-)Black
- Ball Bearing: 50,000hrs(40°C)
- Sleeve Bearing: 30,000hrs(40°C)
- Operating Temperature: -10°C~+70°C
- Storage Temperature: -40°C~+70°C



Technical Specifications

Model	Bearing Type	Rated Voltage(VDC)	Operating Voltage(VDC)	Input Current(A)	Input Power(W)	Speed (RPM)	Max Air Flow (CFM)	(m³/min)	Max Static Pressure (Inch-H₂O)	(Pa)	Noise [dB(A)]	Weight (g)
LWAD12025LX-14	B.S	12	7.0~13.8	0.80	9.60	3500	122.12	3.46	0.31	77.47	49.0	140.0
LWAD12025LH-15	B.S	12	7.0~13.8	0.50	6.00	3000	103.92	2.94	0.24	60.51	44.0	140.0
LWAD12025LM-16	B.S	12	7.0~13.8	0.40	4.80	2500	86.65	2.45	0.18	44.03	39.0	140.0
LWAD12025LL-17	B.S	12	7.0~13.8	0.20	2.40	2000	67.01	1.90	0.10	26.09	35.0	140.0
LWAD12025MX-14	B.S	24	14.0~27.6	0.50	12.00	3500	122.12	3.46	0.31	77.47	49.0	140.0
LWAD12025MH-15	B.S	24	14.0~27.6	0.40	9.60	3000	103.92	2.94	0.24	60.51	44.0	140.0
LWAD12025MM-16	B.S	24	14.0~27.6	0.25	6.00	2500	86.65	2.45	0.18	44.03	39.0	140.0
LWAD12025ML-17	B.S	24	14.0~27.6	0.15	3.60	2000	67.01	1.90	0.10	26.09	35.0	140.0
LWAD12025HX-11	B.S	48	28.0~56.0	0.40	19.20	3500	122.12	3.46	0.31	77.47	49.0	140.0
LWAD12025HH-12	B.S	48	28.0~56.0	0.30	14.40	3000	103.92	2.94	0.24	60.51	44.0	140.0
LWAD12025HM-13	B.S	48	28.0~56.0	0.20	9.60	2500	86.65	2.45	0.18	44.03	39.0	140.0
LWAD12025HL-14	B.S	48	28.0~56.0	0.10	4.80	2000	67.01	1.90	0.10	26.09	35.0	140.0

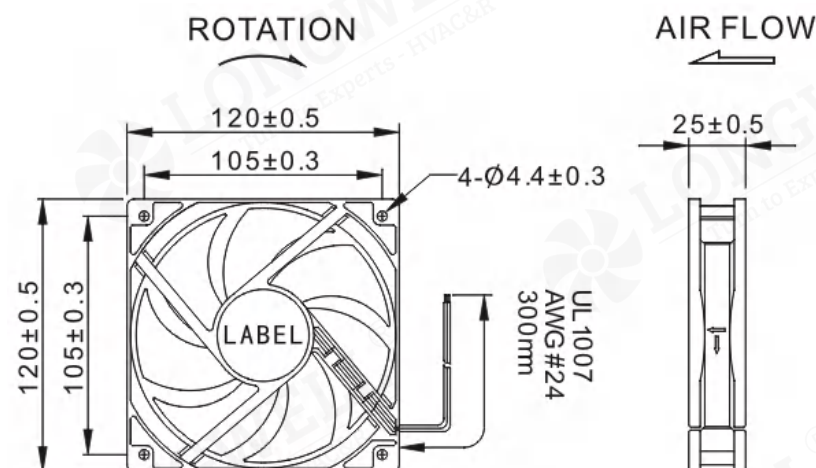

LWAD12032 Serise


Product Characteristic

- Frame: Plastic(UL94V-0)
- Impeller: Plastic(UL94V-0)
- Lead Wire: UL1007AWG#24 or Equivalent (+)Red,(-)Black
- Ball Bearing: 50,000hrs(40°C)
- Sleeve Bearing: 30,000hrs(40°C)
- Operating Temperature: -10°C~+70°C
- Storage Temperature: -40°C~+70°C



Technical Specifications

Model	Bearing Type	Rated Voltage(VDC)	Operating Voltage(VDC)	Input Current(A)	Input Power(W)	Speed (RPM)	Max Air Flow (CFM)	(m³/min)	Max Static Pressure (Inch-H₂O)	(Pa)	Noise [dB(A)]	Weight (g)
LWAD12032LX-01	B	12	7.0~13.8	2.00	24.00	3500	158.22	4.48	0.51	127.39	50.0	237.0
LWAD12032LH-02	B	12	7.0~13.8	1.00	12.00	3000	134.90	3.82	0.38	95.12	46.0	237.0
LWAD12032LM-03	B	12	7.0~13.8	0.80	9.60	2500	110.90	3.14	0.26	64.92	40.0	237.0
LWAD12032LL-04	B	12	7.0~13.8	0.50	6.00	2000	91.15	2.58	0.18	45.60	33.0	237.0
LWAD12032MX-01	B	24	14.0~27.6	1.00	24.00	3500	158.22	4.48	0.51	127.39	50.0	237.0
LWAD12032MH-02	B	24	14.0~27.6	0.70	16.80	3000	134.90	3.82	0.38	95.12	46.0	237.0
LWAD12032MM-03	B	24	14.0~27.6	0.50	12.00	2500	110.90	3.14	0.26	64.92	40.0	237.0
LWAD12032ML-04	B	24	14.0~27.6	0.30	7.20	2000	91.15	2.58	0.18	45.60	33.0	237.0
LWAD12032HX-01	B	48	28.0~56.0	0.60	28.80	3500	158.22	4.48	0.51	127.39	50.0	237.0
LWAD12032HH-02	B	48	28.0~56.0	0.45	21.60	3000	134.90	3.82	0.38	95.12	46.0	237.0
LWAD12032HM-03	B	48	28.0~56.0	0.25	12.00	2500	110.90	3.14	0.26	64.92	40.0	237.0
LWAD12032HL-04	B	48	28.0~56.0	0.15	7.20	2000	91.15	2.58	0.18	45.60	33.0	237.0

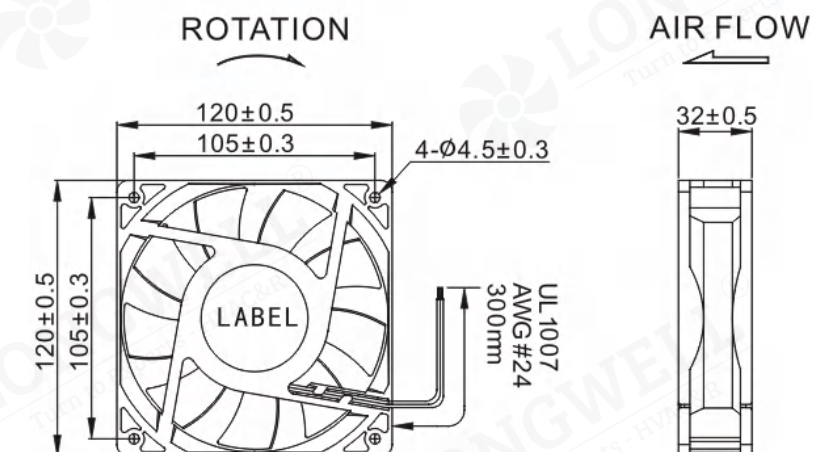

LWAD12038 Serise


Product Characteristic

- Frame: Plastic(UL94V-0)
- Impeller: Plastic(UL94V-0)
- Lead Wire: UL1007AWG#24 or Equivalent (+)Red,(-)Black
- Ball Bearing: 50,000hrs(40°C)
- Sleeve Bearing: 30,000hrs(40°C)
- Operating Temperature: -10°C~+70°C
- Storage Temperature: -40°C~+70°C



Technical Specifications

Model	Bearing Type	Rated Voltage(VDC)	Operating Voltage(VDC)	Input Current(A)	Input Power(W)	Speed (RPM)	Max Air Flow (CFM)	Max Air Flow (m³/min)	Max Static Pressure (Inch-H₂O)	Max Static Pressure (Pa)	Noise [dB(A)]	Weight (g)
LWAD12038LX-18	B.S	12	7.0~13.8	1.50	18.00	4000	165.05	4.67	0.60	150.63	58.0	262.0
LWAD12038LH-19	B.S	12	7.0~13.8	1.00	12.00	3500	144.21	4.08	0.50	124.25	53.0	262.0
LWAD12038LM-20	B.S	12	7.0~13.8	0.60	7.20	3000	115.29	3.27	0.34	83.55	48.0	262.0
LWAD12038LL-21	B.S	12	7.0~13.8	0.40	4.80	2500	101.85	2.88	0.26	64.63	40.0	262.0
LWAD12038MX-18	B.S	24	14.0~27.6	1.00	24.00	4000	165.05	4.67	0.60	150.63	58.0	262.0
LWAD12038MH-19	B.S	24	14.0~27.6	0.60	14.40	3500	144.21	4.08	0.50	124.25	53.0	262.0
LWAD12038MM-20	B.S	24	14.0~27.6	0.40	9.60	3000	115.29	3.27	0.34	83.55	48.0	262.0
LWAD12038ML-21	B.S	24	14.0~27.6	0.20	4.80	2500	101.85	2.88	0.26	64.63	40.0	262.0
LWAD12038HX-17	B.S	48	28.0~56.0	0.60	28.80	4000	165.05	4.67	0.60	150.63	58.0	262.0
LWAD12038HH-18	B.S	48	28.0~56.0	0.40	19.20	3500	144.21	4.08	0.50	124.25	53.0	262.0
LWAD12038HM-19	B.S	48	28.0~56.0	0.20	9.60	3000	115.29	3.27	0.34	83.55	48.0	262.0
LWAD12038HL-20	B.S	48	28.0~56.0	0.12	5.76	2500	101.85	2.88	0.26	64.63	40.0	262.0

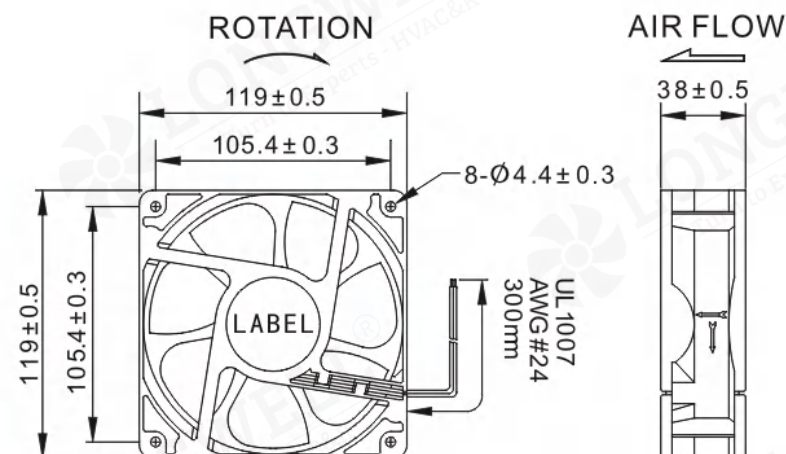

LWAD12038 Serise


Product Characteristic

- Frame: Plastic(UL94V-0)
- Impeller: Plastic(UL94V-0)
- Lead Wire: UL1007AWG#24 or Equivalent (+)Red,(-)Black
- Ball Bearing: 50,000hrs(40°C)
- Sleeve Bearing: 30,000hrs(40°C)
- Operating Temperature: -10°C~+70°C
- Storage Temperature: -40°C~+70°C



Technical Specifications

Model	Bearing Type	Rated Voltage(VDC)	Operating Voltage(VDC)	Input Current(A)	Input Power(W)	Speed (RPM)	Max Air Flow (CFM)	Max Air Flow (m³/min)	Max Static Pressure (Inch-H₂O)	Max Static Pressure (Pa)	Noise [dB(A)]	Weight (g)
LWAD12038LH-22	B	12	7.0~13.8	2.50	30.00	4000	193.50	5.48	0.67	167.69	60.0	289.0
LWAD12038LM-23	B	12	7.0~13.8	1.60	19.20	3500	173.33	4.91	0.54	134.35	55.0	289.0
LWAD12038LL-24	B	12	7.0~13.8	1.00	12.00	3000	145.98	4.13	0.39	97.77	50.0	289.0
LWAD12038MX-22	B	24	14.0~27.6	2.00	48.00	4500	222.31	6.30	0.86	215.26	64.0	289.0
LWAD12038MH-23	B	24	14.0~27.6	1.00	24.00	4000	193.50	5.48	0.67	167.69	60.0	289.0
LWAD12038MM-24	B	24	14.0~27.6	0.70	16.80	3500	173.33	4.91	0.54	134.35	55.0	289.0
LWAD12038ML-25	B	24	14.0~27.6	0.50	12.00	3000	145.98	4.13	0.39	97.77	50.0	289.0
LWAD12038HX-21	B	48	28.0~56.0	1.00	48.00	4500	222.31	6.30	0.86	215.26	64.0	289.0
LWAD12038HH-22	B	48	28.0~56.0	0.60	28.80	4000	193.50	5.48	0.67	167.69	60.0	289.0
LWAD12038HM-23	B	48	28.0~56.0	0.50	24.00	3500	173.33	4.91	0.54	134.35	55.0	289.0
LWAD12038HL-24	B	48	28.0~56.0	0.40	19.20	3000	145.98	4.13	0.39	97.77	50.0	289.0

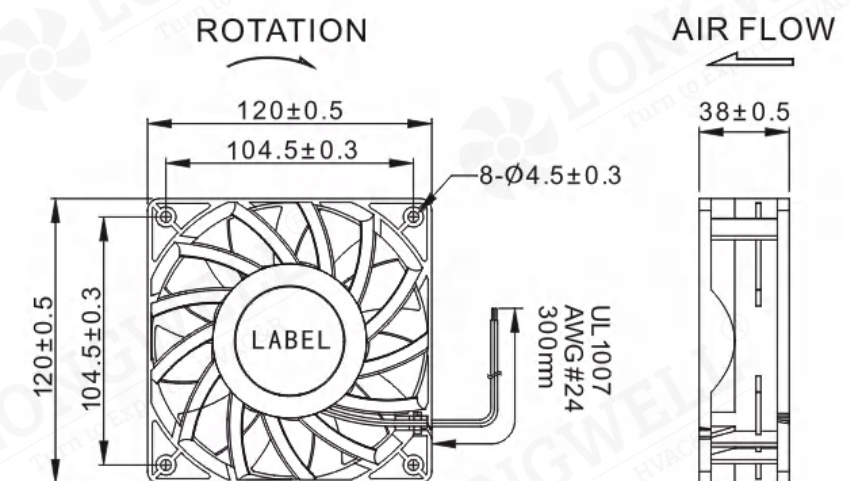

LWAD17040 Serise


Product Characteristic

- Frame: Plastic(UL94V-0)
- Impeller: Plastic(UL94V-0)
- Lead Wire: UL1007AWG#24 or Equivalent (+)Red,(-)Black
- Ball Bearing: 50,000hrs(40°C)
- Sleeve Bearing: 30,000hrs(40°C)
- Operating Temperature: -10°C~+70°C
- Storage Temperature: -40°C~+70°C



Technical Specifications

Model	Bearing Type	Rated Voltage(VDC)	Operating Voltage(VDC)	Input Current(A)	Input Power(W)	Speed (RPM)	Max Air Flow (CFM)	Max Air Flow (m³/min)	Max Static Pressure (Inch-H₂O)	Max Static Pressure (Pa)	Noise [dB(A)]	Weight (g)
LWAD17040LH-01	B	12	7.0~13.8	2.00	24.00	3000	194.17	5.50	0.56	139.35	51.0	503.0
LWAD17040LM-02	B	12	7.0~13.8	1.00	12.00	2500	160.99	4.56	0.39	96.20	43.0	503.0
LWAD17040LL-03	B	12	7.0~13.8	0.70	8.40	2000	128.93	3.65	0.24	60.11	37.0	503.0
LWAD17040MX-01	B	24	14.0~27.6	1.50	36.00	3500	221.04	6.26	0.74	184.07	59.0	503.0
LWAD17040MH-02	B	24	14.0~27.6	0.90	21.60	3000	194.17	5.50	0.56	139.35	51.0	503.0
LWAD17040MM-03	B	24	14.0~27.6	0.60	14.40	2500	160.99	4.56	0.39	96.20	43.0	503.0
LWAD17040ML-04	B	24	14.0~27.6	0.40	9.60	2000	128.93	3.65	0.24	60.11	37.0	503.0
LWAD17040HX-01	B	48	28.0~56.0	0.80	38.40	3500	221.04	6.26	0.74	184.07	59.0	503.0
LWAD17040HH-02	B	48	28.0~56.0	0.60	28.80	3000	194.17	5.50	0.56	139.35	51.0	503.0
LWAD17040HM-03	B	48	28.0~56.0	0.40	19.20	2500	160.99	4.56	0.39	96.20	43.0	503.0
LWAD17040HL-04	B	48	28.0~56.0	0.20	9.60	2000	128.93	3.65	0.24	60.11	37.0	503.0

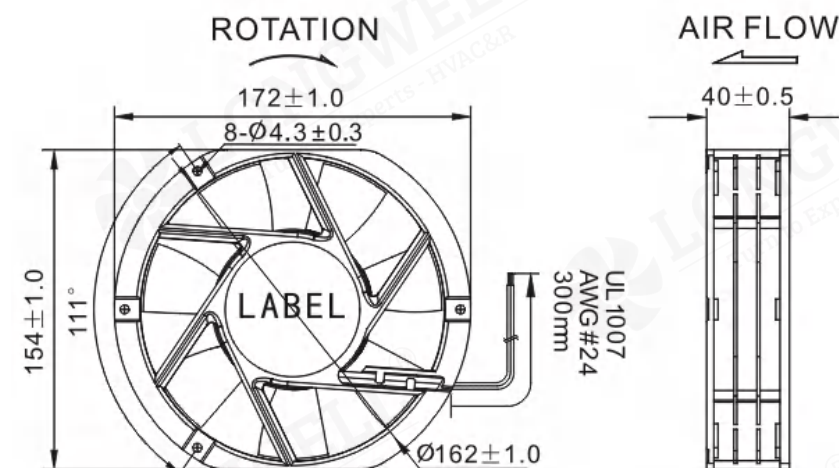

LWAD17251 Serise


Product Characteristic

- Frame: Plastic(UL94V-0)
- Impeller: Plastic(UL94V-0)
- Lead Wire: UL1007AWG#24 or Equivalent (+)Red,(-)Black
- Ball Bearing: 50,000hrs(40°C)
- Sleeve Bearing: 30,000hrs(40°C)
- Operating Temperature: -10°C~+70°C
- Storage Temperature: -40°C~+70°C



Technical Specifications

Model	Bearing Type	Rated Voltage(VDC)	Operating Voltage(VDC)	Input Current(A)	Input Power(W)	Speed (RPM)	Max Air Flow (CFM)	Max Air Flow (m³/min)	Max Static Pressure (Inch-H₂O)	Max Static Pressure (Pa)	Noise [dB(A)]	Weight (g)
LWAD17251LX-06	B	12	7.0~13.8	3.00	36.00	4000	305.29	8.65	1.14	283.51	67.0	740.0
LWAD17251LH-07	B	12	7.0~13.8	2.00	24.00	3500	257.88	7.30	0.71	176.81	59.0	740.0
LWAD17251LM-08	B	12	7.0~13.8	1.50	18.00	3000	220.85	6.25	0.52	128.57	51.0	740.0
LWAD17251LL-09	B	12	17.0~13.8	1.00	12.00	2500	185.24	5.25	0.37	92.77	44.0	740.0
LWAD17251MX-11	B	24	14.0~27.6	1.50	36.00	4000	305.29	8.65	1.14	283.51	67.0	740.0
LWAD17251MH-12	B	24	14.0~27.6	1.00	24.00	3500	257.88	7.30	0.71	176.81	59.0	740.0
LWAD17251MM-13	B	24	14.0~27.6	0.70	16.80	3000	220.85	6.25	0.52	128.57	51.0	740.0
LWAD17251ML-14	B	24	14.0~27.6	0.50	12.00	2500	185.24	5.25	0.37	92.77	44.0	740.0
LWAD17251HX-11	B	48	28.0~56.0	0.80	38.40	4000	305.29	8.65	1.14	283.51	67.0	740.0
LWAD17251HH-12	B	48	28.0~56.0	0.60	28.80	3500	257.88	7.30	0.71	176.81	59.0	740.0
LWAD17251HM-13	B	48	28.0~56.0	0.50	24.00	3000	220.85	6.25	0.52	128.57	51.0	740.0
LWAD17251HL-14	B	48	28.0~56.0	0.40	19.20	2500	185.24	5.25	0.37	92.77	44.0	740.0

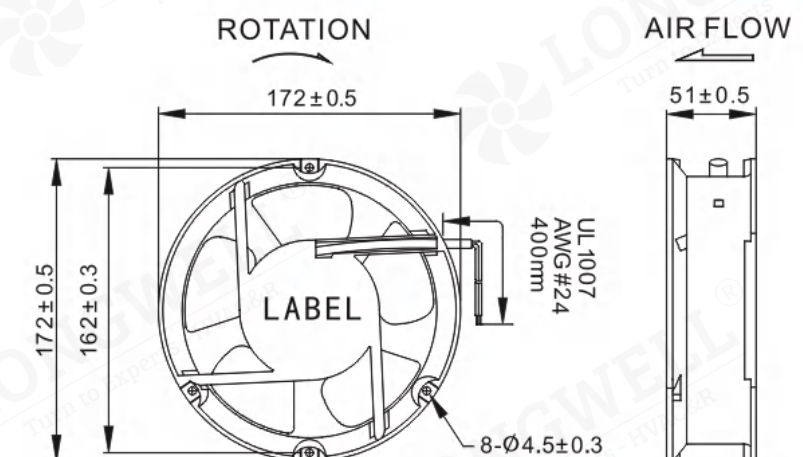

LWAD17251 Serise


Product Characteristic

- Frame: Plastic(UL94V-0)
- Impeller: Plastic(UL94V-0)
- Lead Wire: UL1007AWG#24 or Equivalent (+)Red,(-)Black
- Ball Bearing: 50,000hrs(40°C)
- Sleeve Bearing: 30,000hrs(40°C)
- Operating Temperature: -10°C~+70°C
- Storage Temperature: -40°C~+70°C



Technical Specifications

Model	Bearing Type	Rated Voltage(VDC)	Operating Voltage(VDC)	Input Current(A)	Input Power(W)	Speed (RPM)	Max Air Flow (CFM)	Max Air Flow (m³/min)	Max Static Pressure (Inch-H₂O)	Max Static Pressure (Pa)	Noise [dB(A)]	Weight (g)
LWAD17251LX-10	B	12	7.0~13.8	3.00	36.00	4000	305.29	8.65	1.14	283.51	67.0	740.0
LWAD17251LH-11	B	12	7.0~13.8	2.00	24.00	3500	257.88	7.30	0.71	176.81	59.0	740.0
LWAD17251LM-12	B	12	7.0~13.8	1.50	18.00	3000	220.85	6.25	0.52	128.57	51.0	740.0
LWAD17251LL-13	B	12	7.0~13.8	1.00	12.00	2500	185.24	5.25	0.37	92.77	44.0	740.0
LWAD17251MX-15	B	24	14.0~27.6	1.50	36.00	4000	305.29	8.65	1.14	283.51	67.0	740.0
LWAD17251MH-16	B	24	14.0~27.6	1.00	24.00	3500	257.88	7.30	0.71	176.81	59.0	740.0
LWAD17251MM-17	B	24	14.0~27.6	0.70	16.80	3000	220.85	6.25	0.52	128.57	51.0	740.0
LWAD17251ML-18	B	24	14.0~27.6	0.50	12.00	2500	185.24	5.25	0.37	92.77	44.0	740.0
LWAD17251HX-15	B	48	28.0~56.0	0.80	38.40	4000	305.29	8.65	1.14	283.51	67.0	740.0
LWAD17251HH-16	B	48	28.0~56.0	0.60	28.80	3500	257.88	7.30	0.71	176.81	59.0	740.0
LWAD17251HM-17	B	48	28.0~56.0	0.50	24.00	3000	220.85	6.25	0.52	128.57	51.0	740.0
LWAD17251HL-18	B	48	28.0~56.0	0.40	19.20	2500	185.24	5.25	0.37	92.77	44.0	740.0

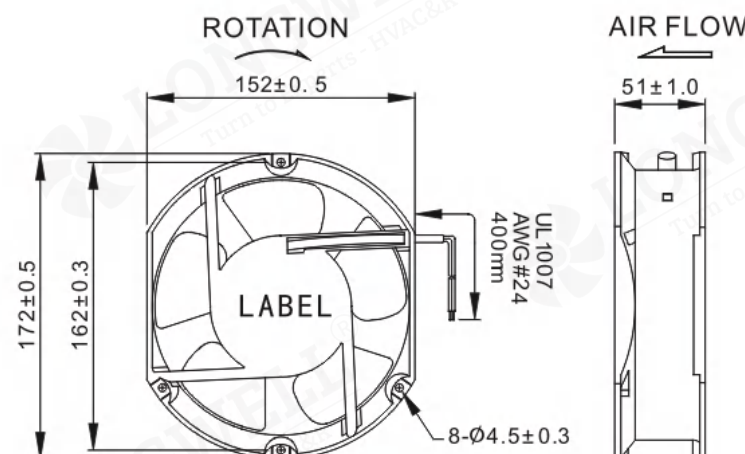

LWAD20060 Serise


Product Characteristic

- Frame: Aluminum Alloy, Painted black
- Impeller: Plastic(UL94V-0)
- Lead Wire: UL1007AWG#20 or Equivalent (+)Red,(-)Black
- Ball Bearing: 50,000hrs(40°C)
- Operating Temperature: -10°C~+70°C
- Storage Temperature: -40°C~+70°C



Technical Specifications

Model	Bearing Type	Rated Voltage(VDC)	Operating Voltage(VDC)	Input Current(A)	Input Power(W)	Speed (RPM)	Max Air Flow (CFM)	Max Air Flow (m³/min)	Max Static Pressure (Inch-H₂O)	Max Static Pressure (Pa)	Noise [dB(A)]	Weight (g)
LWAD20060LH-03	B	12	7.0~13.8	3.50	42.00	3000	640.00	18.13	0.97	241.62	68.0	1031.0
LWAD20060LM-04	B	12	7.0~13.8	2.80	33.60	2500	532.00	15.07	0.74	184.33	58.0	1031.0
LWAD20060LL-05	B	12	7.0~13.8	2.00	24.00	2000	490.00	13.88	0.61	151.94	50.0	1031.0
LWAD20060MH-05	B	24	14.0~27.6	2.50	60.00	3000	640.00	18.13	0.97	241.62	68.0	1031.0
LWAD20060MM-06	B	24	14.0~27.6	1.50	36.00	2500	532.00	15.07	0.74	184.33	58.0	1031.0
LWAD20060HH-03	B	48	28.0~56.0	1.20	57.60	3000	640.00	18.13	0.97	241.62	68.0	1031.0
LWAD20060HM-04	B	48	28.0~56.0	0.80	38.40	2500	532.00	15.07	0.74	184.33	58.0	1031.0
LWAD20060HL-05	B	48	28.0~56.0	0.50	24.00	2000	490.00	13.88	0.61	151.94	50.0	1031.0

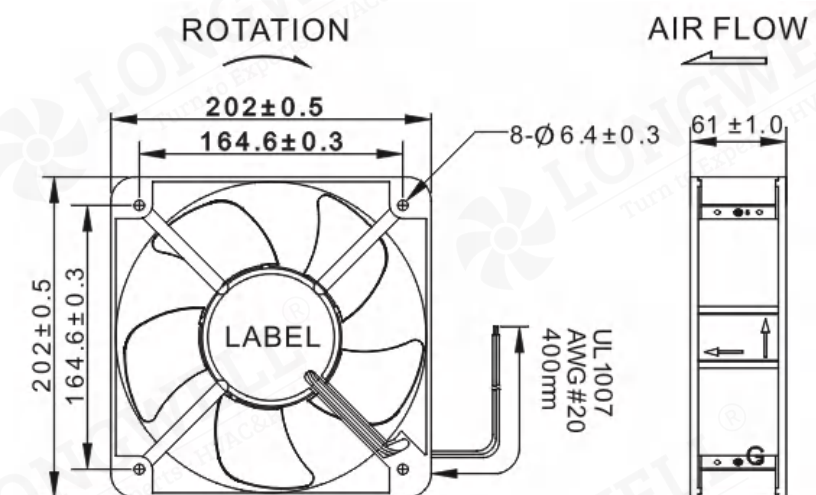

LWAD25489 Serise


Product Characteristic

- Frame: Aluminum Alloy, Painted black
- Impeller: Plastic (UL94V-0)
- Lead Wire: UL1007AWG#20 or Equivalent (+)Red, (-)Black
- Ball Bearing: 50,000hrs(40°C)
- Operating Temperature: -10°C~+70°C
- Storage Temperature: -40°C~+70°C



Technical Specifications

Model	Bearing Type	Rated Voltage(VDC)	Operating Voltage(VDC)	Input Current(A)	Input Power(W)	Speed (RPM)	Max Air Flow (CFM)	(m³/min)	Max Static Pressure (Inch-H₂O)	(Pa)	Noise [dB(A)]	Weight (g)
LWAD25489MH-01	B	24	14.0~27.6	3.50	84.00	2600	890.00	25.21	1.01	251.58	68.0	2140.0
LWAD25489MM-02	B	24	14.0~27.6	2.20	52.80	2100	718.85	20.36	0.82	204.25	55.0	2140.0
LWAD25489ML-03	B	24	14.0~27.6	1.50	36.00	1600	547.69	15.51	0.62	154.44	42.0	2140.0
LWAD25489HH-01	B	48	28.0~56.0	2.00	96.00	2600	890.00	25.21	1.01	251.58	68.0	2140.0
LWAD25489HM-02	B	48	28.0~56.0	1.20	57.00	2100	718.85	20.36	0.82	204.25	55.0	2140.0
LWAD25489HL-03	B	48	28.0~56.0	0.80	38.40	1600	547.69	15.51	0.62	154.44	42.0	2140.0

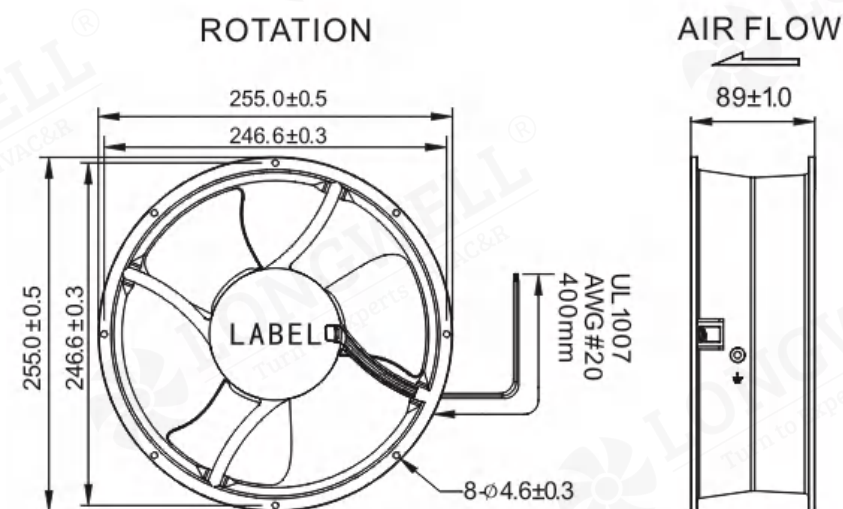

LWAD2010 Serise



Product Characteristic

- Frame: Plastic (UL94)
- Impeller: Plastic (UL94)
- Bearing Type: Sleeve Bearing (EBI)
Fluid Dynamic Bearing (FDB)
Two Ball Bearings



Technical Specifications

Model	Rated Voltage (VDC)	Rated Current (A)	Rated Input Power(W)	Rated Speed (RPM)	Maximum Air Flow(CFM)	Maximum Air Pressure(mmH ₂ O)	Noise [dB(A)]
LWAD2010KL-04	5	0.04	0.20	7000	0.75	1.06	20.00
LWAD2010LL-04	12	0.02	0.24	7000	0.75	1.06	20.00
LWAD2010KL-05	5	0.06	0.30	10000	1.05	2.16	20.80
LWAD2010LL-05	12	0.03	0.36	10000	1.05	2.16	20.80
LWAD2010KM-06	5	0.08	0.40	12000	1.14	2.65	21.30
LWAD2010LM-06	12	0.05	0.60	12000	1.14	2.65	21.30

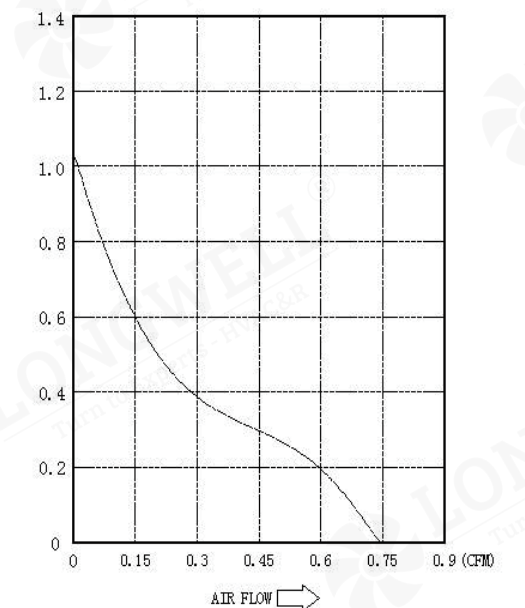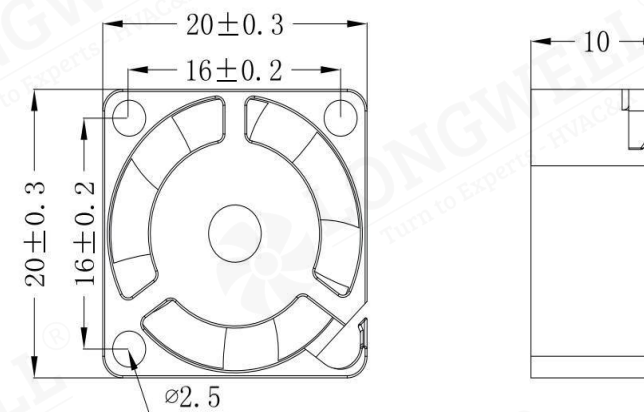

LWAD2507 Serise



Product Characteristic

- Frame: Plastic(UL94)
- Impeller: Plastic(UL94)
- Bearing Type: Sleeve Bearing (EBI)
Fluid Dynamic Bearing (FDB)
Two Ball Bearings



Technical Specifications

Model	Rated Voltage (VDC)	Rated Current (A)	Rated Input Power(W)	Rated Speed (RPM)	Maximum Air Flow(CFM)	Maximum Air Pressure(mmH ₂ O)	Noise [dB(A)]
LWAD2507KL-05	5	0.15	0.75	6000	1.30	1.10	20.50
LWAD2507KM-06	5	0.31	1.55	14000	2.98	5.87	33.80
LWAD2507KM-07	5	0.36	1.80	16000	3.40	7.67	36.80

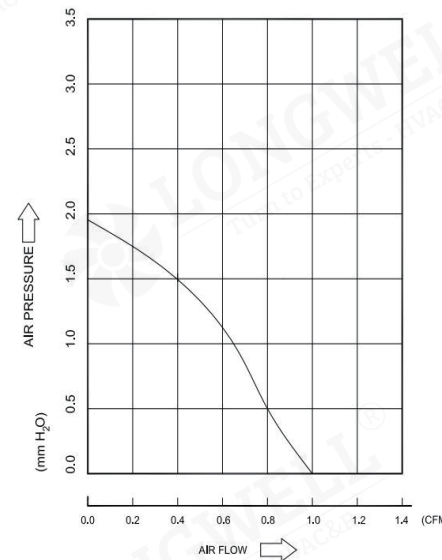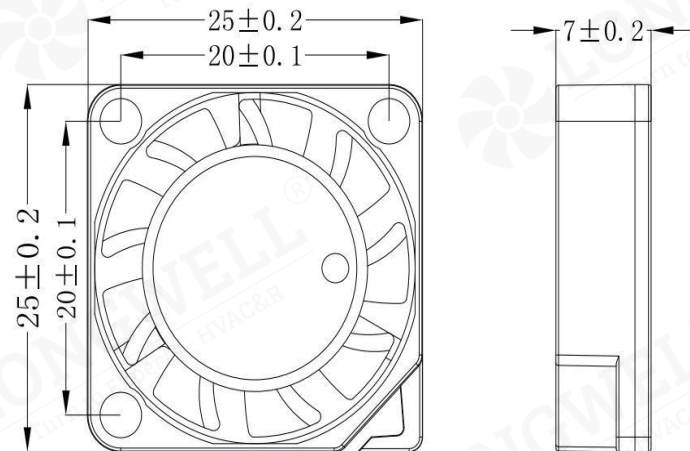

LWAD2510 Serise



Product Characteristic

- Frame: Plastic(UL94)
- Impeller: Plastic(UL94)
- Bearing Type: Sleeve Bearing (EBI)
Fluid Dynamic Bearing (FDB)
Two Ball Bearings



Technical Specifications

Model	Rated Voltage (VDC)	Rated Current (A)	Rated Input Power(W)	Rated Speed (RPM)	Maximum Air Flow(CFM)	Maximum Air Pressure(mmH ₂ O)	Noise [dB(A)]
LWAD2510KL-10	5	0.09	0.45	7000	1.21	2.18	19.60
LWAD2510LL-11	12	0.03	0.36	7000	1.21	2.18	
LWAD2510KM-11	5	0.13	0.65	10000	1.99	4.48	22.80
LWAD2510LM-12	12	0.05	0.60	10000	1.99	4.48	
LWAD2510KH-12	5	0.17	0.85	12000	2.38	7.37	25.20
LWAD2510LH-13	12	0.08	0.96	12000	2.38	7.37	
LWAD2510KX-13	5	0.23	1.15	15000	2.98	7.98	28.90
LWAD2510LX-14	12	0.12	1.44	15000	2.98	7.98	

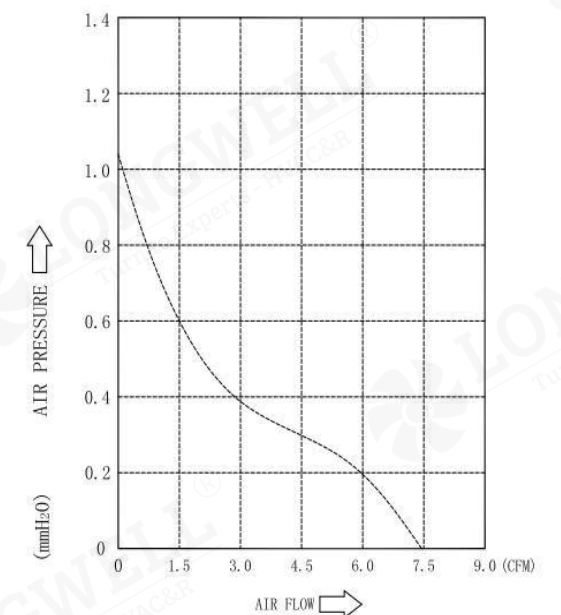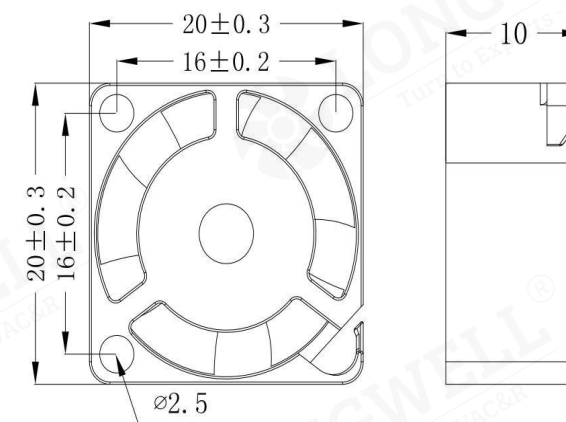

LWAD3010 Serise



Product Characteristic

- Frame: Plastic(UL94)
- Impeller: Plastic(UL94)
- Bearing Type: Sleeve Bearing (EBI)
Fluid Dynamic Bearing (FDB)
Two Ball Bearings



Technical Specifications

Model	Rated Voltage (VDC)	Rated Current (A)	Rated Input Power(W)	Rated Speed (RPM)	Maximum Air Flow(CFM)	Maximum Air Pressure(mmH ₂ O)	Noise [dB(A)]
LWAD3010KL-11	5	0.07	0.35	5000	1.36	0.95	19.00
LWAD3010LL-12	12	0.06	0.72	5000	1.36	0.95	19.00
LWAD3010KM-12	5	0.08	0.40	6500	2.37	1.10	21.50
LWAD3010LM-13	12	0.07	0.84	6500	2.37	1.10	21.50
LWAD3010KH-13	5	0.20	1.00	8000	3.15	1.55	23.40
LWAD3010LH-14	12	0.09	1.08	8000	3.15	1.55	23.40
LWAD3010KX-14	5	0.17	0.85	10000	3.95	1.93	25.50
LWAD3010LX-15	12	0.10	1.20	10000	3.95	1.93	25.50
LWAD3010KX-15	5	0.22	1.10	13000	5.56	2.51	26.90
LWAD3010LX-16	12	0.12	1.44	13000	5.56	2.51	26.90

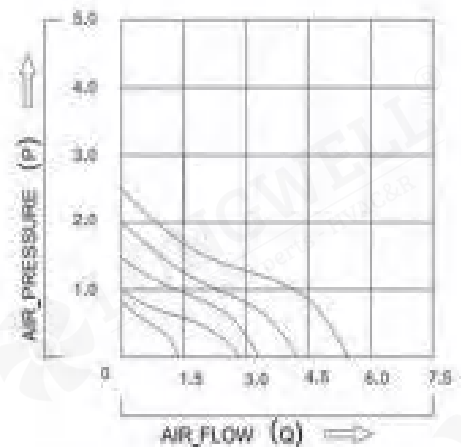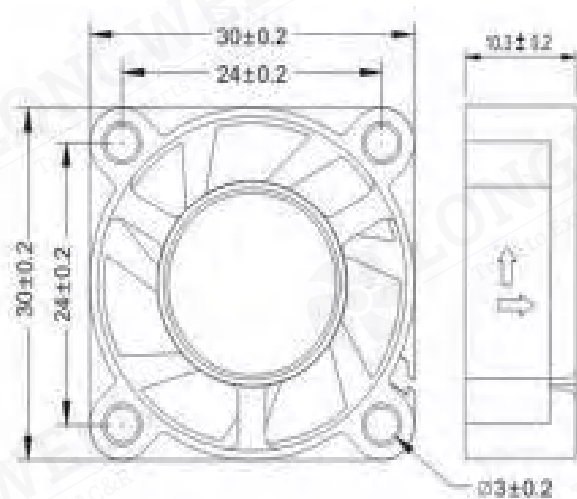

LWAD4010 Serise



Product Characteristic

- Frame: Plastic(UL94)
- Impeller: Plastic(UL94)
- Bearing Type: Sleeve Bearing (EBI)
Fluid Dynamic Bearing (FDB)
Two Ball Bearings



Technical Specifications

Model	Rated Voltage (VDC)	Rated Current (A)	Rated Input Power(W)	Rated Speed (RPM)	Maximum Air Flow(CFM)	Maximum Air Pressure(mmH ₂ O)	Noise [dB(A)]
LWAD4010KL-10	5	0.10	0.50	4500	3.88	2.00	25.00
LWAD4010LL-10	12	0.05	0.60	4500	3.88	2.00	25.00
LWAD4010KM-11	5	0.15	0.75	5500	4.60	3.22	28.00
LWAD4010LM-11	12	0.07	0.84	5500	4.60	3.22	28.00
LWAD4010MM-09	24	0.03	0.72	5500	4.60	3.22	28.00
LWAD4010KH-12	5	0.20	1.00	6600	5.72	4.72	35.00
LWAD4010LH-12	12	0.09	1.08	6600	5.72	4.72	35.00
LWAD4010KH-13	5	0.20	1.00	7000	3.50	5.00	36.50
LWAD4010LX-11	12	0.16	1.92	8000	9.23	5.56	38.40
LWAD4010MX-10	24	0.80	1.92	8000	9.23	5.56	38.40

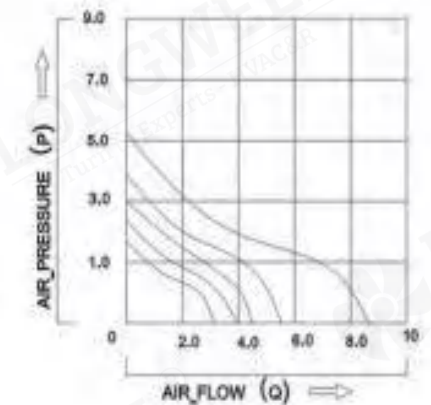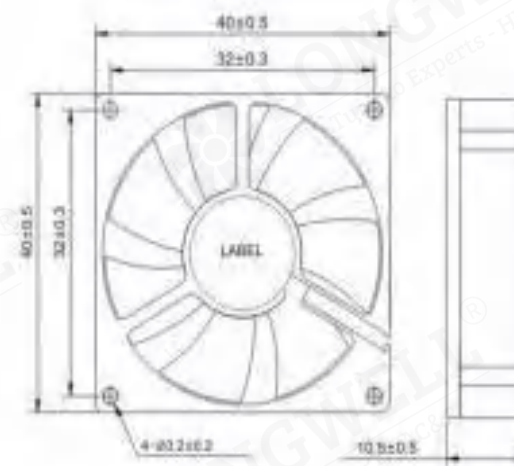

LWAD4028 Serise



Product Characteristic

- Frame: Plastic(UL94)
- Impeller: Plastic(UL94)
- Bearing Type: Sleeve Bearing (EBI)
Fluid Gynamic Bearing (FDB)
Two Ball Bearings



Technical Specifications

Model	Rated Voltage (VDC)	Rated Current (A)	Rated Input Power(W)	Rated Speed (RPM)	Maximum Air Flow(CFM)	Maximum Air Pressure(mmH ₂ O)	Noise [dB(A)]
LWAD4028LX-10	12	0.46	5.52	18000	20.93	48.41	58.00
LWAD4028MX-10	24	0.24	5.76	18000	20.93	48.41	58.00
LWAD4028LX-11	12	1.50	18.00	24000	27.66	73.00	62.00

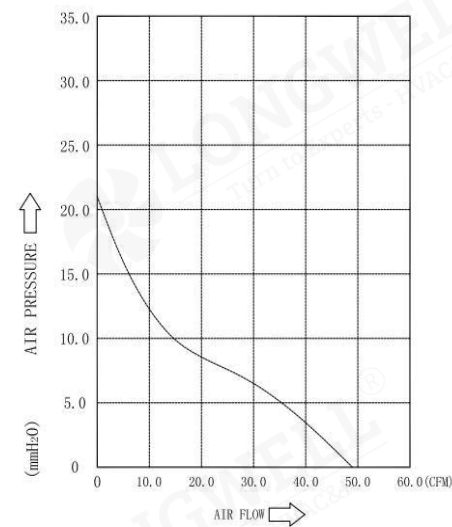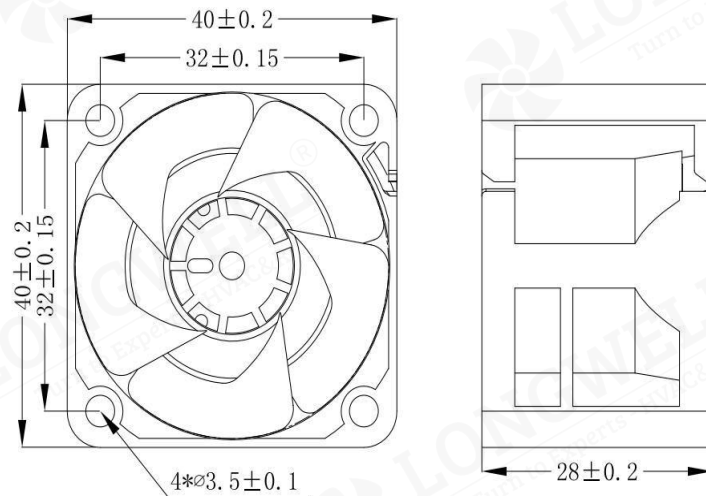

LWAD5010 Serise



Product Characteristic

- Frame: Plastic(UL94)
- Impeller: Plastic(UL94)
- Bearing Type: Sleeve Bearing (EBI)
Fluid Gynamic Bearing (FDB)
Two Ball Bearings



Technical Specifications

Model	Rated Voltage (VDC)	Rated Current (A)	Rated Input Power(W)	Rated Speed (RPM)	Maximum Air Flow(CFM)	Maximum Air Pressure(mmH ₂ O)	Noise [dB(A)]
LWAD5010KL-10	5	0.16	0.80	3500	7.42	1.75	24.50
LWAD5010LL-11	12	0.06	0.72	3500	7.42	1.75	24.50
LWAD5010ML-11	24	0.04	0.96	3500	7.42	1.75	24.50
LWAD5010KM-11	5	0.19	0.95	4500	9.51	2.87	28.50
LWAD5010LM-12	12	0.08	0.95	4500	9.51	2.87	28.50
LWAD5010MM-12	24	0.05	1.20	4500	9.51	2.87	28.50
LWAD5010KH-12	5	0.21	1.05	5500	11.20	4.21	32.50
LWAD5010LH-13	12	0.09	1.08	5500	11.20	4.21	32.50
LWAD5010MH-13	24	0.08	1.92	5500	11.20	4.21	32.50
LWAD5010KX-13	5	0.25	1.25	6500	13.50	5.80	37.50
LWAD5010LX-14	12	0.12	1.44	6500	13.50	5.80	37.50
LWAD5010MX-14	24	0.10	2.40	6500	13.50	5.80	37.50

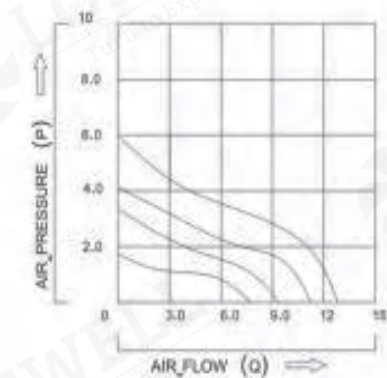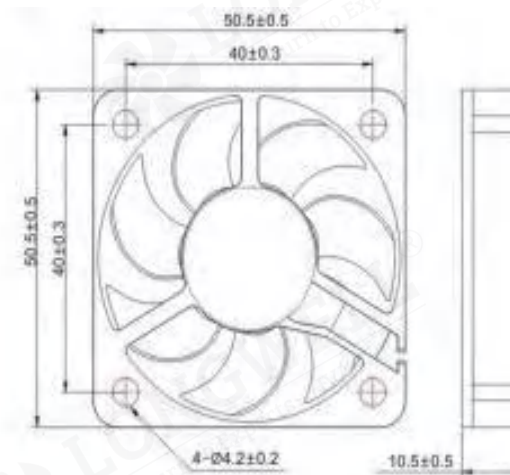

LWAD6010 Serise



Product Characteristic

- Frame: Plastic(UL94)
- Impeller: Plastic(UL94)
- Bearing Type: Sleeve Bearing (EBI)
Fluid Gynamic Bearing (FDB)
Two Ball Bearings



Technical Specifications

Model	Rated Voltage (VDC)	Rated Current (A)	Rated Input Power(W)	Rated Speed (RPM)	Maximum Air Flow(CFM)	Maximum Air Pressure(mmH ₂ O)	Noise [dB(A)]
LWAD6010KL-09	5	0.20	1.00	3000	13.42	1.65	24.50
LWAD6010LL-10	12	0.12	1.44	3000	13.42	1.65	24.50
LWAD6010KM-10	5	0.22	1.10	3600	15.54	2.40	29.00
LWAD6010LM-11	12	0.16	1.92	3600	15.54	2.40	29.00
LWAD6010KH-11	5	0.25	1.25	4200	18.01	3.35	33.00
LWAD6010LH-12	12	0.20	2.40	4200	18.01	3.35	33.00
LWAD6010LX-13	12	0.22	2.64	4800	21.19	4.30	36.50
LWAD6010LX-14	12	0.25	3.00	5300	23.30	4.57	38.00

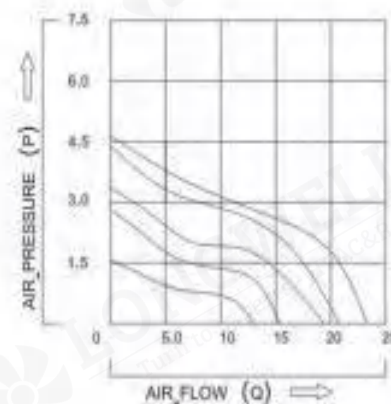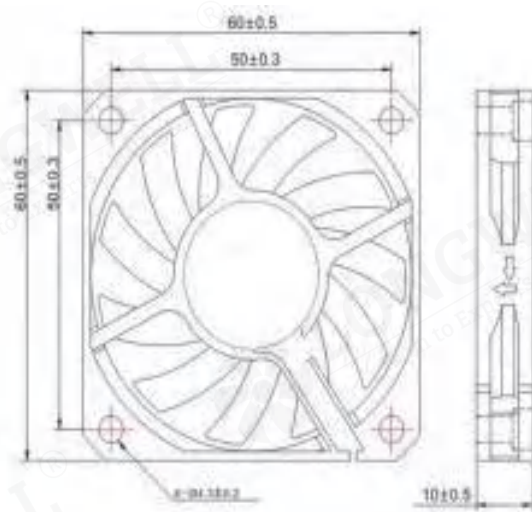

LWAD6025 Serise



Product Characteristic

- Frame: Plastic(UL94)
- Impeller: Plastic(UL94)
- Bearing Type: Sleeve Bearing (EBI)
Fluid Gynamic Bearing (FDB)
Two Ball Bearings



Technical Specifications

Model	Rated Voltage (VDC)	Rated Current (A)	Rated Input Power(W)	Rated Speed (RPM)	Maximum Air Flow(CFM)	Maximum Air Pressure(mmH ₂ O)	Noise [dB(A)]
LWAD6025LM-12	12	0.08	0.96	3600	16.87	3.02	30.41
LWAD6025MM-11	24	0.06	1.44	3600	16.87	3.02	30.41
LWAD6025LH-13	12	0.13	1.56	4500	21.10	4.72	35.30
LWAD6025MH-12	24	0.09	2.16	4500	21.10	4.72	35.30
LWAD6025LX-14	12	0.18	2.16	5000	23.43	5.83	37.50
LWAD6025MX-13	24	0.09	2.16	5000	23.43	5.83	37.50
LWAD6025LX-15	12	0.30	3.60	6000	28.12	8.40	41.50
LWAD6025MX-14	24	0.20	4.80	6000	28.12	8.40	41.50

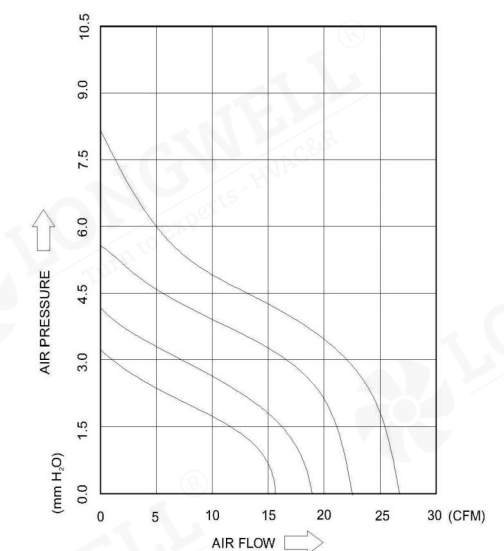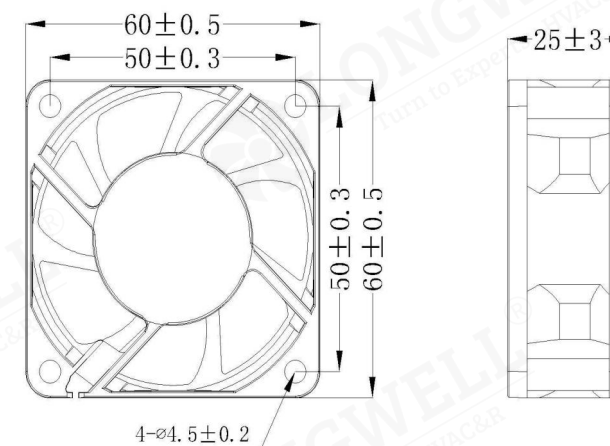

LWAD6038 Serise



Product Characteristic

- Frame: Plastic(UL94)
- Impeller: Plastic(UL94)
- Bearing Type: Sleeve Bearing (EBI)
Fluid Gynamic Bearing (FDB)
Two Ball Bearings



Technical Specifications

Model	Rated Voltage (VDC)	Rated Current (A)	Rated Input Power(W)	Rated Speed (RPM)	Maximum Air Flow(CFM)	Maximum Air Pressure(mmH ₂ O)	Noise [dB(A)]
LWAD6038LL-10	12	0.10	1.20	4000	17.15	5.41	30.15
LWAD6038ML-11	24	0.06	1.44	4000	17.15	5.41	30.15
LWAD6038LM-11	12	0.15	1.80	5000	21.55	7.26	34.25
LWAD6038MM-12	24	0.07	1.68	5000	21.55	7.26	34.25
LWAD6038HM-11	48	0.05	2.40	5000	21.55	7.26	34.25
LWAD6038LH-12	12	0.21	2.52	6000	26.18	11.23	38.60
LWAD6038MH-13	24	0.13	3.12	6000	26.18	11.23	38.60
LWAD6038HH-12	48	0.09	4.32	6000	26.18	11.23	38.60
LWAD6038LX-13	12	0.30	3.60	7000	31.01	14.12	40.12
LWAD6038MX-14	24	0.20	4.80	7000	31.01	14.12	40.12
LWAD6038HX-13	48	0.12	5.76	7000	31.01	14.12	40.12
LWAD6038LX-14	12	0.58	6.96	8200	38.00	19.60	45.20
LWAD6038MX-15	24	0.32	7.68	8200	38.00	19.60	45.20
LWAD6038HX-14	48	0.14	6.72	8200	38.00	19.60	45.20

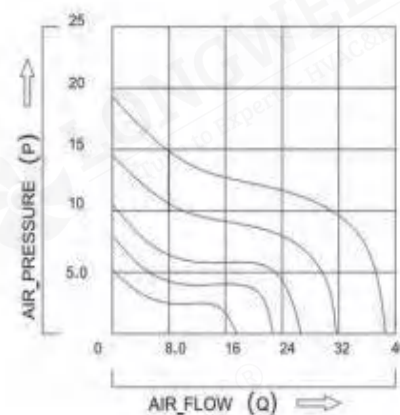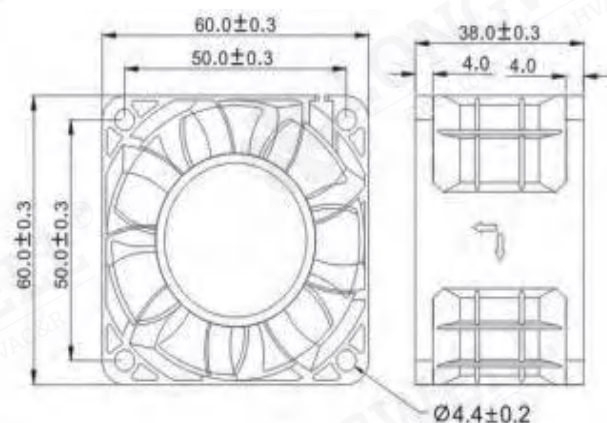

LWAD8010/8015 Serise



Product Characteristic

- Frame: Plastic(UL94)
- Impeller: Plastic(UL94)
- Bearing Type: Sleeve Bearing (EBI)
Fluid Gynamic Bearing (FDB)
Two Ball Bearings



Technical Specifications

Model	Rated Voltage (VDC)	Rated Current (A)	Rated Input Power(W)	Rated Speed (RPM)	Maximum Air Flow(CFM)	Maximum Air Pressure(mmH ₂ O)	Noise [dB(A)]
LWAD8010KL-06	5	0.24	1.20	2500	22.15	2.20	27.50
LWAD8010LL-06	12	0.15	1.80	2500	22.15	2.20	27.50
LWAD8010ML-06	24	0.08	1.92	2500	22.15	2.20	27.50
LWAD8015LH-10	12	0.20	2.40	3000	30.42	3.40	32.50
LWAD8015MH-09	24	0.13	3.12	3000	30.42	3.40	32.50
LWAD8015LX-11	12	0.25	3.00	3500	37.60	3.95	36.50
LWAD8015MX-10	24	0.16	3.84	3500	37.60	3.95	36.50
LWAD8015LX-12	12	0.38	4.56	5000	44.20	8.10	53.71
LWAD8015MX-11	24	0.19	4.56	5000	44.50	8.10	53.71

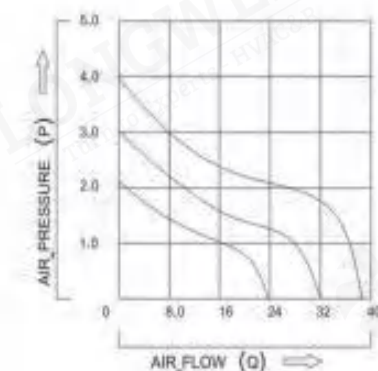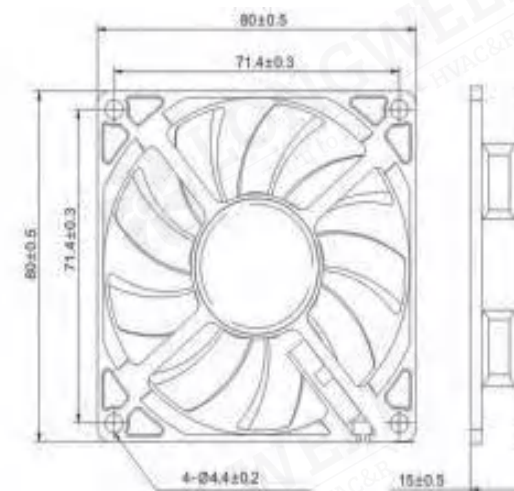

LWAD8020 Serise



Product Characteristic

- Frame: Plastic(UL94)
- Impeller: Plastic(UL94)
- Bearing Type: Sleeve Bearing (EBI)
Fluid Gynamic Bearing (FDB)
Two Ball Bearings



Technical Specifications

Model	Rated Voltage (VDC)	Rated Current (A)	Rated Input Power(W)	Rated Speed (RPM)	Maximum Air Flow(CFM)	Maximum Air Pressure(mmH ₂ O)	Noise [dB(A)]
LWAD8020XL-01	5	0.24	1.20	2500	24.70	2.20	27.50
LWAD8020LL-10	12	0.15	1.80	2500	24.70	2.20	27.50
LWAD8020ML-10	24	0.08	1.92	2500	24.70	2.20	27.50
LWAD8020XM-02	5	0.33	1.65	2700	28.30	2.71	30.50
LWAD8020LM-11	12	0.18	2.16	2700	28.30	2.71	30.50
LWAD8020MM-11	24	0.11	2.64	2700	28.30	2.71	30.50
LWAD8020LH-12	12	0.20	2.40	3000	32.50	3.40	32.50
LWAD8020MH-12	24	0.13	3.12	3000	32.50	3.40	32.50
LWAD8020LX-13	12	0.25	3.00	3300	34.67	3.95	36.50
LWAD8020MX-13	24	0.16	3.84	3300	34.67	3.95	36.50

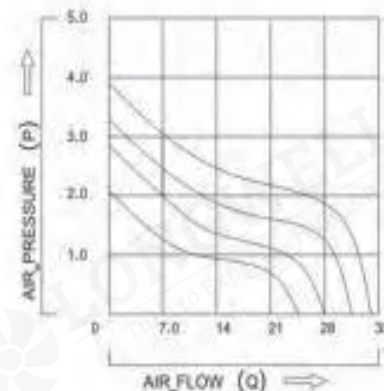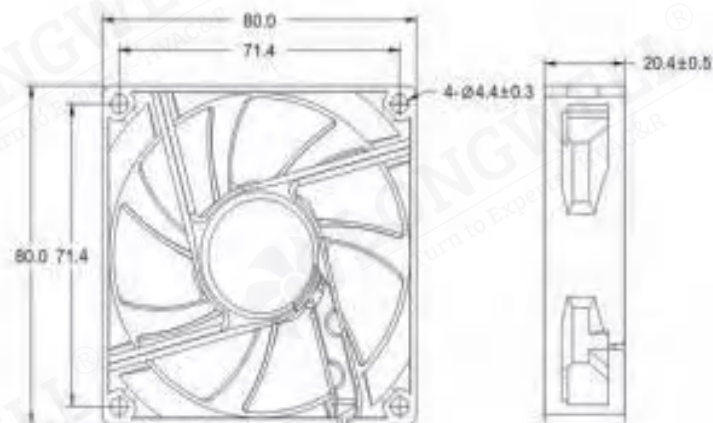

LWAD8025 Serise



Product Characteristic

- Frame: Plastic(UL94)
- Impeller: Plastic(UL94)
- Bearing Type: Sleeve Bearing (EBI)
Fluid Gynamic Bearing (FDB)
Two Ball Bearings



Technical Specifications

Model	Rated Voltage (VDC)	Rated Current (A)	Rated Input Power(W)	Rated Speed (RPM)	Maximum Air Flow(CFM)	Maximum Air Pressure(mmH ₂ O)	Noise [dB(A)]
LWAD8025XL-01	5	0.25	1.25	2500	29.00	2.81	26.00
LWAD8025LL-25	12	0.10	1.20	2500	29.00	2.81	26.00
LWAD8025ML-27	24	0.06	1.44	2500	29.00	2.81	26.00
LWAD8025XM-02	5	0.33	1.65	2700	31.43	3.28	28.00
LWAD8025LM-26	12	0.12	1.44	2700	31.43	3.28	28.00
LWAD8025MM-28	24	0.06	1.44	2700	31.43	3.28	28.00
LWAD8025XH-03	5	0.43	2.15	3000	35.31	4.04	31.00
LWAD8025LH-27	12	0.16	1.92	3000	35.31	4.04	31.00
LWAD8025MH-29	24	0.07	1.68	3000	35.31	4.04	31.00
LWAD8025LX-28	12	0.20	2.40	3250	37.43	4.59	34.00
LWAD8025MX-30	24	0.09	2.16	3250	37.43	4.59	34.00
LWAD8025LX-29	12	0.26	3.12	3600	42.02	5.51	38.00
LWAD8025MX-31	24	0.14	3.36	3600	42.02	5.51	38.00

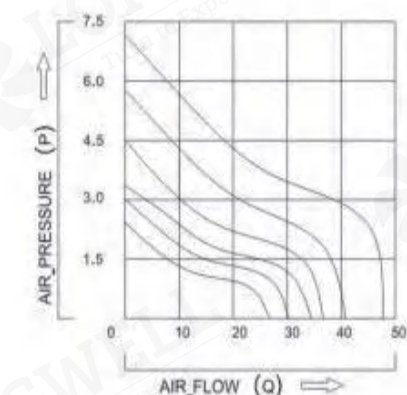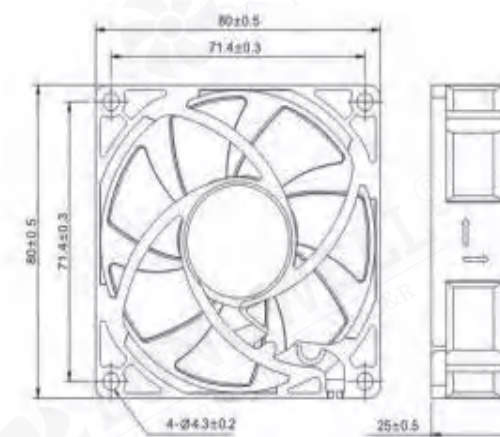

LWAD8025 Serise



Product Characteristic

- Frame: Plastic(UL94)
- Impeller: Plastic(UL94)
- Bearing Type: Sleeve Bearing (EBI)
Fluid Gynamic Bearing (FDB)
Two Ball Bearings



Technical Specifications

Model	Rated Voltage (VDC)	Rated Current (A)	Rated Input Power(W)	Rated Speed (RPM)	Maximum Air Flow(CFM)	Maximum Air Pressure(mmH ₂ O)	Noise [dB(A)]
LWAD8025LX-30	12	0.12	1.44	3300	41.20	4.82	37.50
LWAD8025MX-32	24	0.06	1.44	3300	41.20	4.82	37.50
LWAD8025LX-31	12	0.15	1.80	3500	43.40	5.23	40.50
LWAD8025MX-33	24	0.075	1.80	3500	43.40	5.23	40.50

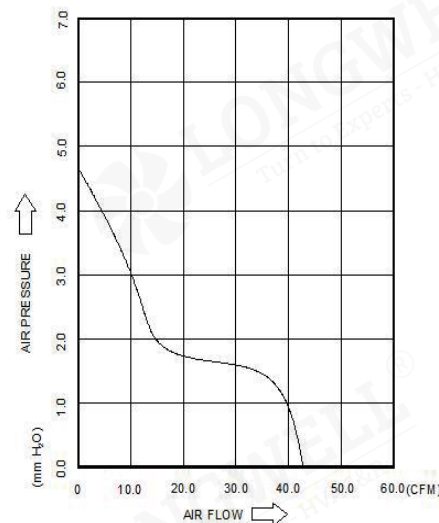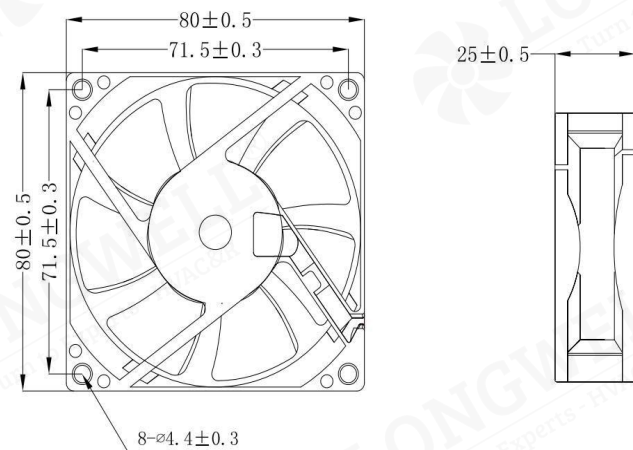

LWAD8038 Serise



Product Characteristic

- Frame: Plastic(UL94)
- Impeller: Plastic(UL94)
- Bearing Type: Sleeve Bearing (EBI)
Fluid Gynamic Bearing (FDB)
Two Ball Bearings



Technical Specifications

Model	Rated Voltage (VDC)	Rated Current (A)	Rated Input Power(W)	Rated Speed (RPM)	Maximum Air Flow(CFM)	Maximum Air Pressure(mmH ₂ O)	Noise [dB(A)]
LWAD8038LL-17	12	0.36	4.32	3600	46.27	6.76	48.50
LWAD8038ML-17	24	0.18	4.32	3600	46.27	6.76	48.50
LWAD8038LH-18	12	0.53	6.36	5200	66.84	14.10	56.50
LWAD8038MH-18	24	0.27	6.48	5200	66.84	14.10	56.50

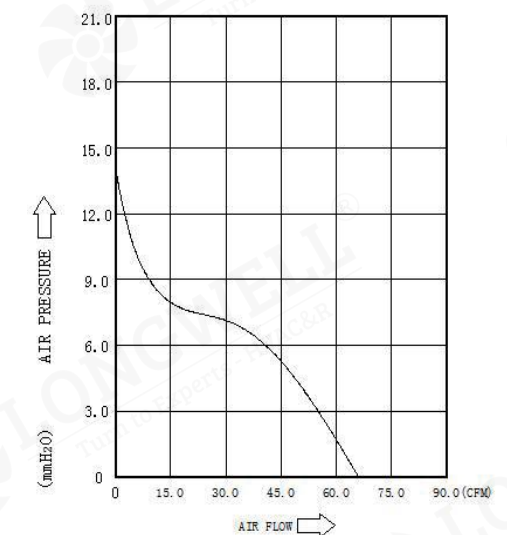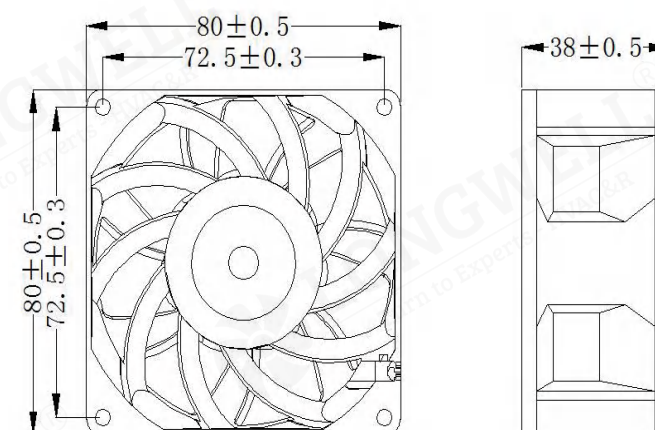

LWAD9215 Serise



Product Characteristic

- Frame: Plastic(UL94)
- Impeller: Plastic(UL94)
- Bearing Type: Sleeve Bearing (EBI)
Fluid Dynamic Bearing (FDB)
Two Ball Bearings



Technical Specifications

Model	Rated Voltage (VDC)	Rated Current (A)	Rated Input Power(W)	Rated Speed (RPM)	Maximum Air Flow(CFM)	Maximum Air Pressure(mmH ₂ O)	Noise [dB(A)]
LWAD9215XL-01	5	0.30	1.50	2100	27.60	2.39	24.12
LWAD9215LL-01	12	0.15	1.80	2100	27.60	2.39	24.12
LWAD9215ML-01	24	0.08	1.92	2100	27.60	2.39	24.12
LWAD9215XM-02	5	0.40	2.00	2450	32.20	2.78	30.00
LWAD9215LM-02	12	0.20	2.40	2450	32.20	2.78	30.00
LWAD9215MM-02	24	0.10	2.40	2450	32.20	2.78	30.00
LWAD9215LH-03	12	0.25	3.00	2850	37.45	3.24	34.00
LWAD9215MH-03	24	0.13	3.12	2850	37.45	3.24	34.00
LWAD9215LX-04	12	0.30	3.60	3200	42.05	3.64	38.00
LWAD9215MX-04	24	0.17	4.08	3200	42.05	3.64	38.00
LWAD9215LX-05	12	0.40	4.80	3800	49.90	4.32	45.00
LWAD9215MX-05	24	0.22	5.28	3800	49.90	4.32	45.00

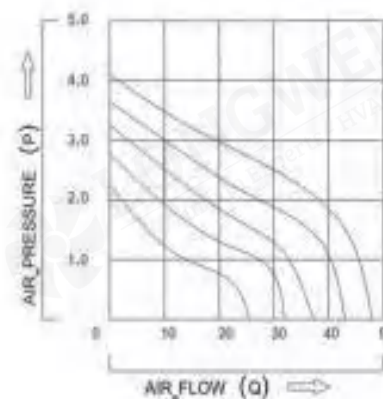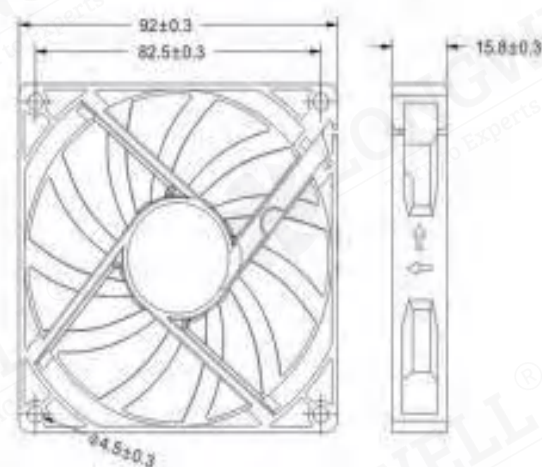

LWAD9225 Serise



Product Characteristic

- Frame: Plastic(UL94)
- Impeller: Plastic(UL94)
- Bearing Type: Sleeve Bearing (EBI)
Fluid Dynamic Bearing (FDB)
Two Ball Bearings



Technical Specifications

Model	Rated Voltage (VDC)	Rated Current (A)	Rated Input Power(W)	Rated Speed (RPM)	Maximum Air Flow(CFM)	Maximum Air Pressure(mmH ₂ O)	Noise [dB(A)]
LWAD9225XL-01	5	0.16	0.80	2100	37.08	2.53	25.00
LWAD9225LL-22	12	0.07	0.84	2100	37.08	2.53	25.00
LWAD9225ML-20	24	0.06	1.44	2100	37.08	2.53	25.00
LWAD9225XM-02	5	0.26	1.30	2450	43.79	3.25	30.00
LWAD9225LM-23	12	0.11	1.32	2450	43.79	3.25	30.00
LWAD9225MM-21	24	0.08	1.92	2450	43.79	3.25	30.00
LWAD9225LH-24	12	0.16	1.92	2850	51.21	4.50	34.00
LWAD9225MH-22	24	0.10	2.40	2850	51.21	4.50	34.00
LWAD9225HH-19	48	0.06	2.88	2850	51.21	4.50	34.00
LWAD9225LX-25	12	0.25	3.00	3200	57.92	5.62	38.00
LWAD9225MX-23	24	0.13	3.12	3200	57.92	5.62	38.00
LWAD9225HX-20	48	0.09	4.32	3200	57.92	5.62	38.00
LWAD9225LX-26	12	0.40	4.80	3850	67.80	7.67	45.00
LWAD9225MX-24	24	0.22	5.28	3850	67.80	7.67	45.00
LWAD9225HX-21	48	0.12	5.76	3850	67.80	7.67	45.00

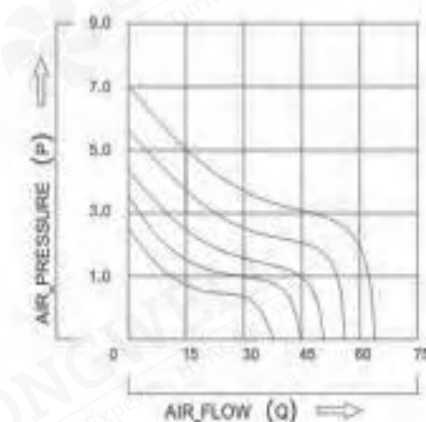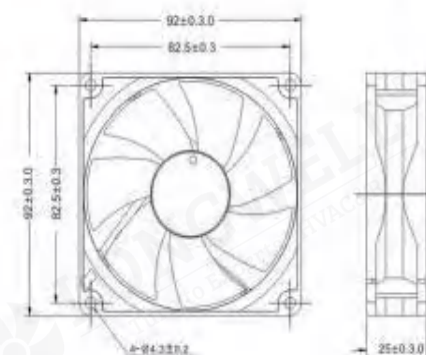

LWAD9225 Serise



Product Characteristic

- Frame: Plastic(UL94)
- Impeller: Plastic(UL94)
- Bearing Type: Sleeve Bearing (EBI)
Fluid Gynamic Bearing (FDB)
Two Ball Bearings



Technical Specifications

Model	Rated Voltage (VDC)	Rated Current (A)	Rated Input Power(W)	Rated Speed (RPM)	Maximum Air Flow(CFM)	Maximum Air Pressure(mmH ₂ O)	Noise [dB(A)]
LWAD9225XL-03	5	0.16	0.80	2100	37.08	2.53	25.00
LWAD9225LL-27	12	0.07	0.84	2100	37.08	2.53	25.00
LWAD9225ML-25	24	0.06	1.44	2100	37.08	2.53	25.00
LWAD9225XM-04	5	0.26	1.30	2450	43.79	3.25	30.00
LWAD9225LM-28	12	0.11	1.32	2450	43.79	3.25	30.00
LWAD9225MM-26	24	0.08	1.92	2450	43.79	3.25	30.00
LWAD9225LH-29	12	0.16	1.92	2850	51.21	4.50	34.00
LWAD9225MH-27	24	0.16	2.40	2850	51.21	4.50	34.00
LWAD9225HH-22	48	0.06	2.88	2850	51.21	4.50	34.00
LWAD9225LX-30	12	0.25	3.00	3200	57.92	5.62	38.00
LWAD9225MX-28	24	0.13	3.12	3200	57.92	5.62	38.00
LWAD9225HX-23	48	0.09	4.32	3200	57.92	5.62	38.00
LWAD9225LX-31	12	0.40	4.80	3850	67.80	7.67	45.00
LWAD9225MX-29	24	0.22	5.28	3850	67.80	7.67	45.00
LWAD9225HX-24	48	0.12	5.76	3850	67.80	7.67	45.00

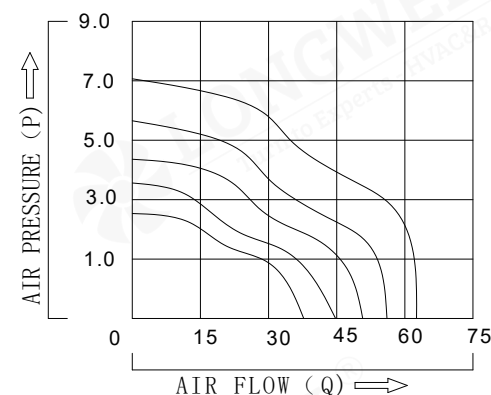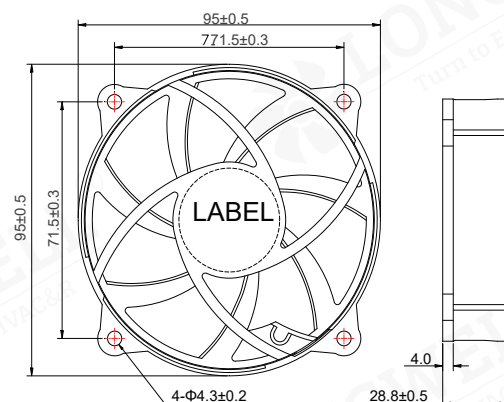

LWAD9238 Serise



Product Characteristic

- Frame: Plastic(UL94)
- Impeller: Plastic(UL94)
- Bearing Type: Sleeve Bearing (EBI)
Fluid Gynamic Bearing (FDB)
Two Ball Bearings



Technical Specifications

Model	Rated Voltage (VDC)	Rated Current (A)	Rated Input Power(W)	Rated Speed (RPM)	Maximum Air Flow(CFM)	Maximum Air Pressure(mmH ₂ O)	Noise [dB(A)]
LWAD9238LX-18	12	2.00	24.00	7000	147.00	39.50	65.00
LWAD9238MX-17	24	1.00	24.00	7000	147.00	39.50	65.00
LWAD9238LX-19	12	4.00	48.00	8000	168.00	51.50	69.00
LWAD9238MX-18	24	2.00	48.00	8000	168.00	51.50	69.00

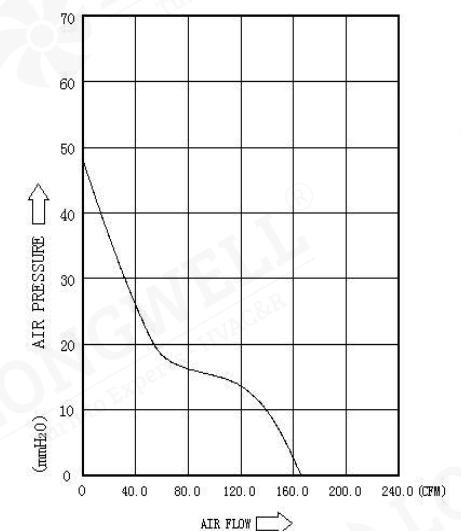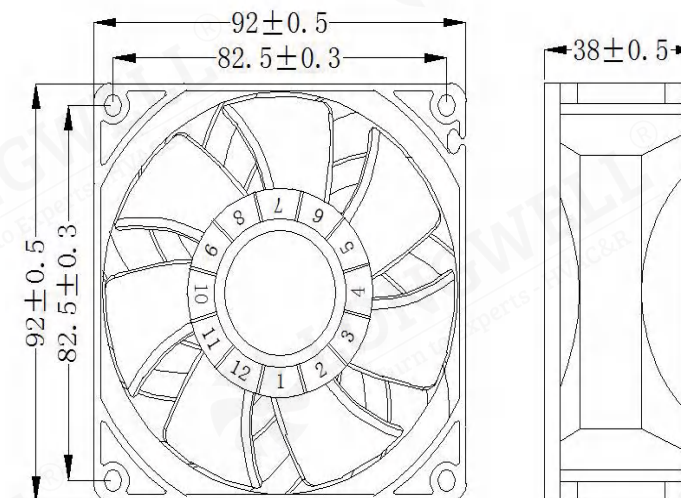

LWAD12025 Serise



Product Characteristic

- Frame: Plastic(UL94)
- Impeller: Plastic(UL94)
- Bearing Type: Sleeve Bearing (EBI)
Fluid Dynamic Bearing (FDB)
Two Ball Bearings



Technical Specifications

Model	Rated Voltage (VDC)	Rated Current (A)	Rated Input Power(W)	Rated Speed (RPM)	Maximum Air Flow(CFM)	Maximum Air Pressure(mmH ₂ O)	Noise [dB(A)]
LWAD12025LL-18	12	0.20	2.40	2000	50.30	2.83	38.00
LWAD12025ML-18	24	0.10	2.40	2000	50.30	2.83	38.00
LWAD12025LL-19	12	0.30	3.60	2800	76.74	5.08	45.30
LWAD12025MH-19	24	0.15	3.60	2800	76.74	5.08	45.30
LWAD12025LX-20	12	0.19	2.28	3100	84.96	6.23	47.50
LWAD12025MH-20	24	0.10	2.40	3100	84.96	6.23	47.50
LWAD12025LX-21	12	0.80	9.60	5000	137.00	16.20	57.00
LWAD120254MH-21	24	0.40	9.60	5000	137.00	16.20	57.00

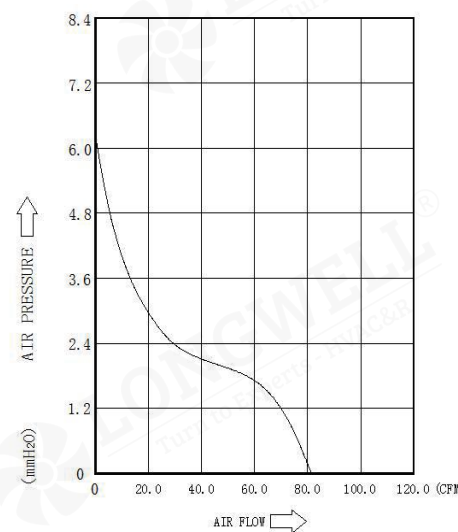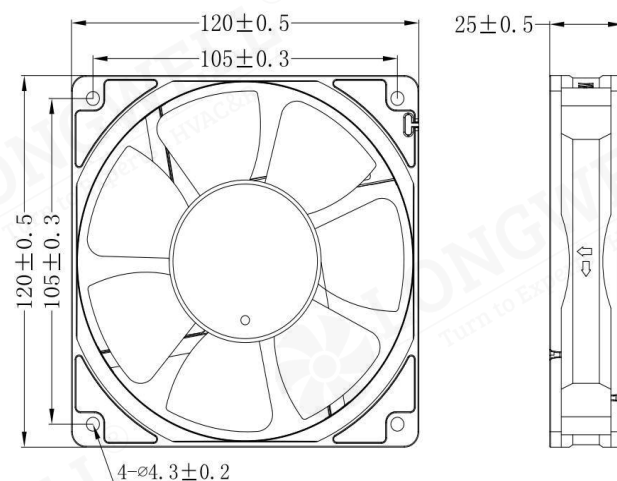

LWAD12038 Serise



Product Characteristic

- Frame: Plastic(UL94)
- Impeller: Plastic(UL94)
- Bearing Type: Sleeve Bearing (EBI)
Fluid Dynamic Bearing (FDB)
Two Ball Bearings



Technical Specifications

Model	Rated Voltage (VDC)	Rated Current (A)	Rated Input Power(W)	Rated Speed (RPM)	Maximum Air Flow(CFM)	Maximum Air Pressure(mmH ₂ O)	Noise [dB(A)]
LWAD12038LL-25	12	0.30	3.60	2000	84.76	4.56	32.50
LWAD12038ML-26	24	0.15	3.60	2000	84.76	4.56	32.50
LWAD12038HL-25	48	0.08	3.84	2000	84.76	4.56	32.50
LWAD12038LM-26	12	0.40	4.80	2300	95.00	6.00	35.50
LWAD12038MM-27	24	0.18	4.32	2300	95.00	6.00	35.50
LWAD12038HM-26	48	0.10	4.80	2300	95.00	6.00	35.50
LWAD12038LH-27	12	0.70	8.40	2500	102.00	7.10	37.30
LWAD12038MH-28	24	0.30	7.20	2500	102.00	7.10	37.30
LWAD12038HH-27	48	0.18	8.64	2500	102.00	7.10	37.30
LWAD12038LX-28	12	0.90	10.80	2900	120.07	9.00	41.50
LWAD12038MX-29	24	0.40	9.60	2900	120.07	9.00	41.50
LWAD12038HX-28	48	0.25	12.00	2900	120.07	9.00	41.50
LWAD12038MX-30	24	1.20	28.80	4000	166.50	12.40	56.40
LWAD12038HX-29	48	0.70	33.60	4000	166.50	12.40	56.40

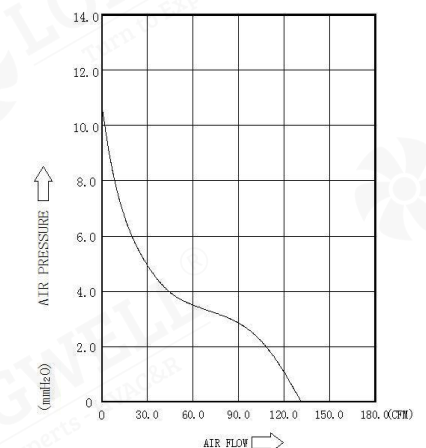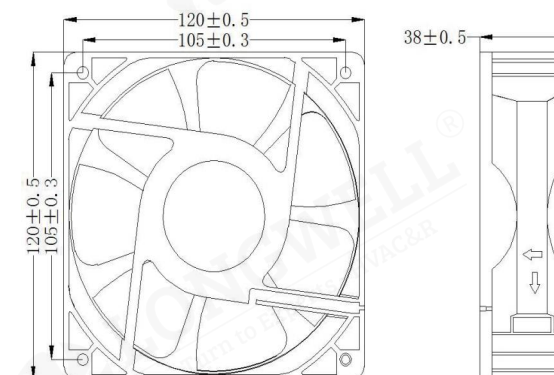

LWAD12038 Serise



Product Characteristic

- Frame: Plastic(UL94)
- Impeller: Plastic(UL94)
- Bearing Type: Sleeve Bearing (EBI)
Fluid Gynamic Bearing (FDB)
Two Ball Bearings



Technical Specifications

Model	Rated Voltage (VDC)	Rated Current (A)	Rated Input Power(W)	Rated Speed (RPM)	Maximum Air Flow(CFM)	Maximum Air Pressure(mmH ₂ O)	Noise [dB(A)]
LWAD12038LH-29	12	0.08	0.96	2100	68.50	3.20	42.50

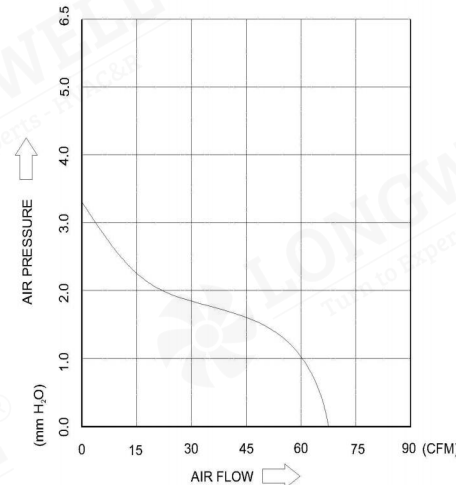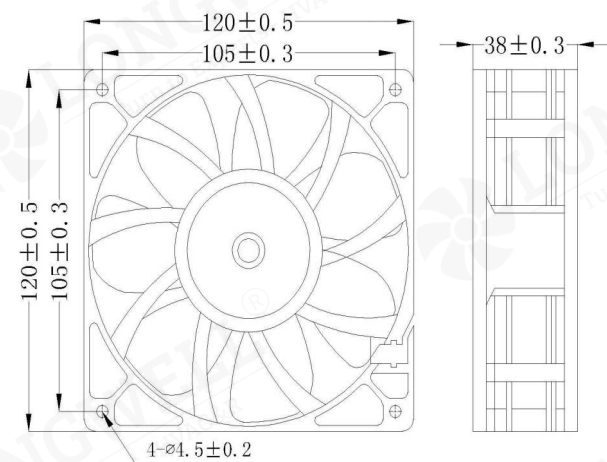

LWAD14025 Serise



Product Characteristic

- Frame: Plastic(UL94)
- Impeller: Plastic(UL94)
- Bearing Type: Sleeve Bearing (EBI)
Fluid Gynamic Bearing (FDB)
Two Ball Bearings



Technical Specifications

Model	Rated Voltage (VDC)	Rated Current (A)	Rated Input Power(W)	Rated Speed (RPM)	Maximum Air Flow(CFM)	Maximum Air Pressure(mmH ₂ O)	Noise [dB(A)]
LWAD14025LL-01	12	0.18	2.16	1850	74.50	5.75	33.40
LWAD14025ML-01	24	0.10	2.40	1850	74.50	5.75	33.40
LWAD14025LM-02	12	0.20	2.40	2200	86.82	6.82	36.86
LWAD14025MM-02	24	0.12	2.88	2200	86.82	6.82	36.86
LWAD14025LH-03	12	0.23	2.76	2500	98.66	7.75	40.25
LWAD14025MH-03	24	0.14	3.36	2500	98.66	7.75	40.25
LWAD14025LX-04	12	0.33	3.96	2800	110.50	8.68	45.90
LWAD14025MX-04	24	0.18	4.32	2800	110.50	8.68	45.90

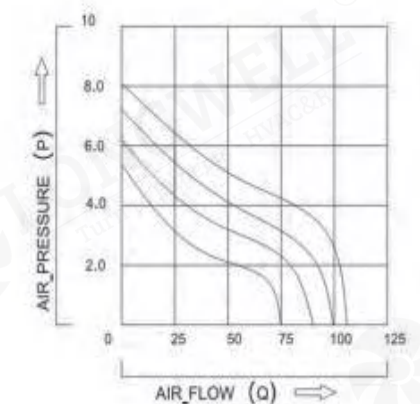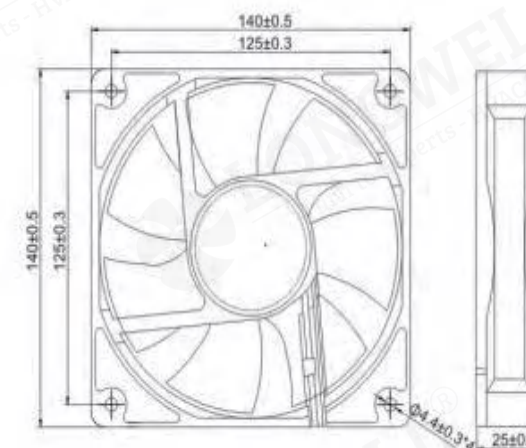

LWAD20020 Serise



Product Characteristic

- Frame: Plastic(UL94)
- Impeller: Plastic(UL94)
- Bearing Type: Sleeve Bearing (EBI)
Fluid Gynamic Bearing (FDB)
Two Ball Bearings



Technical Specifications

Model	Rated Voltage (VDC)	Rated Current (A)	Rated Input Power(W)	Rated Speed (RPM)	Maximum Air Flow(CFM)	Maximum Air Pressure(mmH ₂ O)	Noise [dB(A)]
LWAD20020XL-01	5	0.30	1.50	600	62.30	3.20	25.40
LWAD20020LL-01	12	0.15	1.80	600	62.30	3.20	25.40

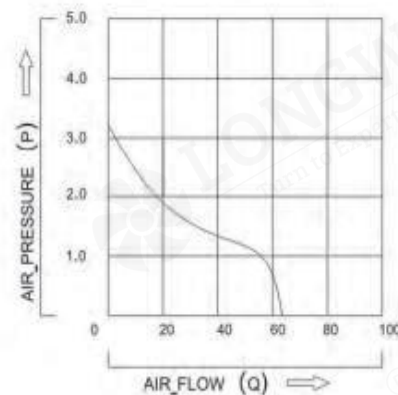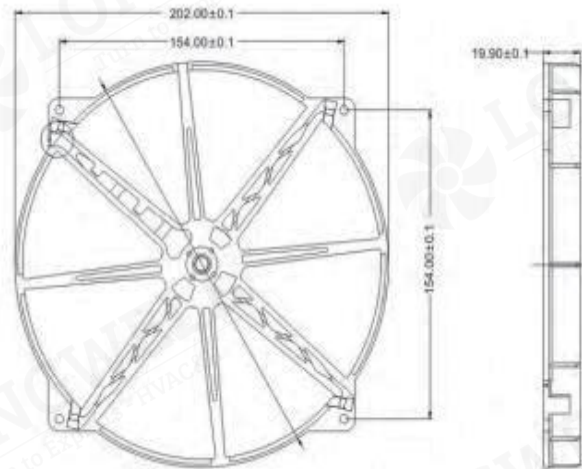

LWAD17251 Serise



Product Characteristic

- Frame: Plastic(UL94)
- Impeller: Plastic(UL94)
- Bearing Type: Two Ball Bearings



Technical Specifications

Model	Rated Voltage (VDC)	Rated Current (A)	Rated Input Power(W)	Rated Speed (RPM)	Maximum Air Flow(CFM)	Maximum Air Pressure(mmH ₂ O)	Noise [dB(A)]
LWAD17251LL-14	12	0.65	7.80	2000	132.50	6.90	45.00
LWAD17251ML-19	24	0.30	7.20	2000	132.50	6.90	45.00
LWAD17251HL-19	48	0.18	8.64	2000	132.50	6.90	45.00
LWAD17251LM-15	12	1.50	18.00	3000	198.20	10.35	57.00
LWAD17251MM-20	24	0.70	16.80	3000	198.20	10.35	57.00
LWAD17251HM-20	48	0.35	16.80	3000	198.20	10.35	57.00
LWAD17251LH-16	12	2.80	33.60	3800	251.80	13.11	64.00
LWAD17251MH-21	24	1.30	31.20	3800	251.80	13.11	64.00
LWAD17251HH-21	48	0.65	31.20	3800	251.80	13.11	64.00
LWAD17251LX-17	12	3.80	45.60	4500	298.30	15.52	72.00
LWAD17251MX-22	24	1.90	45.60	4500	298.30	15.52	72.00
LWAD17251HX-22	48	0.95	45.60	4500	298.30	15.52	72.00

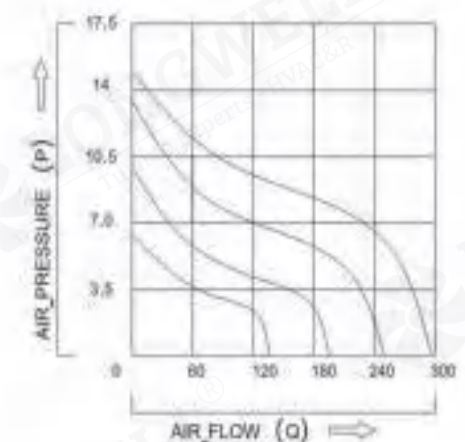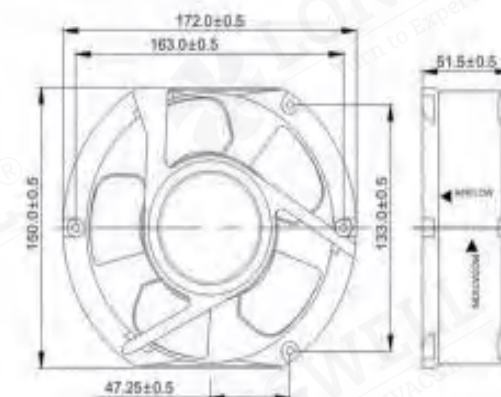

LWAD17251 Serise



Product Characteristic

- Frame: Plastic(UL94)
- Impeller: Plastic(UL94)
- Bearing Type: Two Ball Bearings



Technical Specifications

Model	Rated Voltage (VDC)	Rated Current (A)	Rated Input Power(W)	Rated Speed (RPM)	Maximum Air Flow(CFM)	Maximum Air Pressure(mmH ₂ O)	Noise [dB(A)]
LWAD17251HH-23	48	0.64	30.72	4000	305.29	28.92	67.00

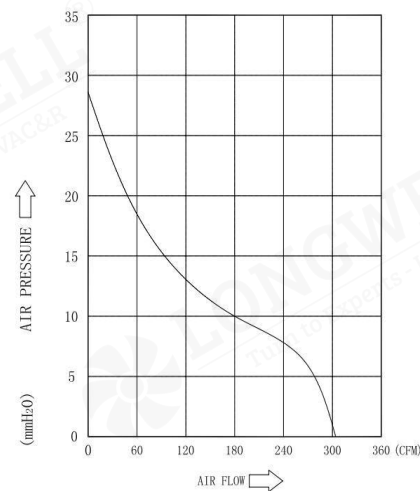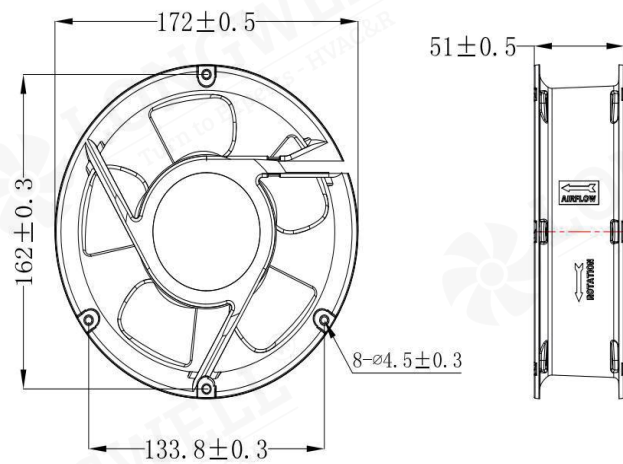

LWAD20060 Serise



Product Characteristic

- Frame: Plastic(UL94)
- Impeller: Plastic(UL94)
- Bearing Type: Two Ball Bearings



Technical Specifications

Model	Rated Voltage (VDC)	Rated Current (A)	Rated Input Power(W)	Rated Speed (RPM)	Maximum Air Flow(CFM)	Maximum Air Pressure(mmH ₂ O)	Noise [dB(A)]
LWAD20060MH-08	24	3.50	84.00	3000	568.95	28.27	65.80

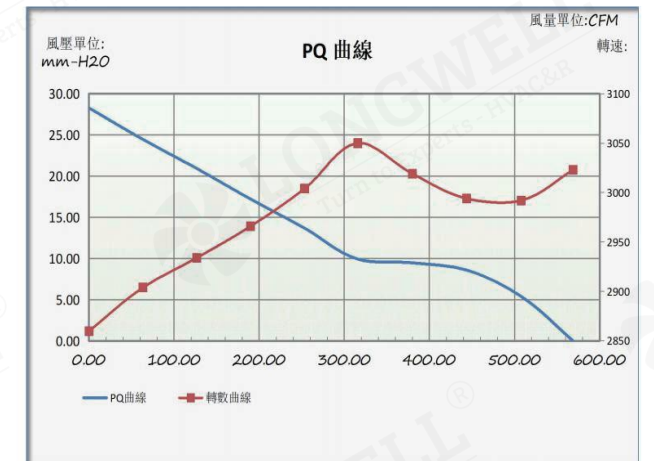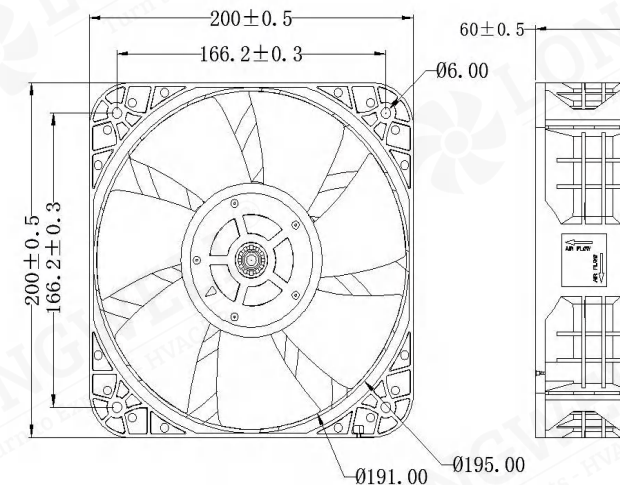

LWAD20572 Serise

Product Characteristic

- Frame: Plastic(UL94)
- Impeller: Plastic(UL94)
- Bearing Type: Two Ball Bearings





DC Blower

Professional HVAC Fan &Motors Manufacturer

Technical Specifications

Model	Rated Voltage (VDC)	Rated Current (A)	Rated Input Power(W)	Rated Speed (RPM)	Maximum Air Flow(CFM)	Maximum Air Pressure(mmH ₂ O)	Noise [dB(A)]
LWAD20572LL-01	12	3.00	36.00	1700	198.00	10.30	62.00
LWAD20572ML-01	24	1.50	36.00	1700	198.00	10.30	62.00

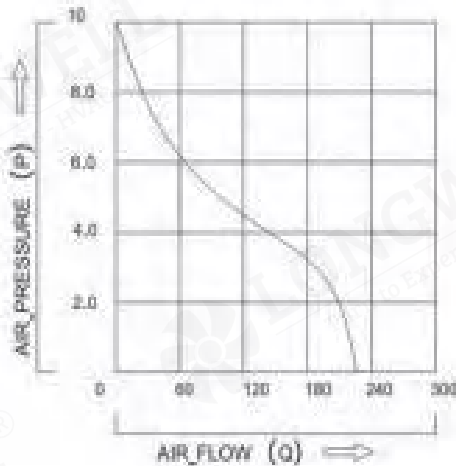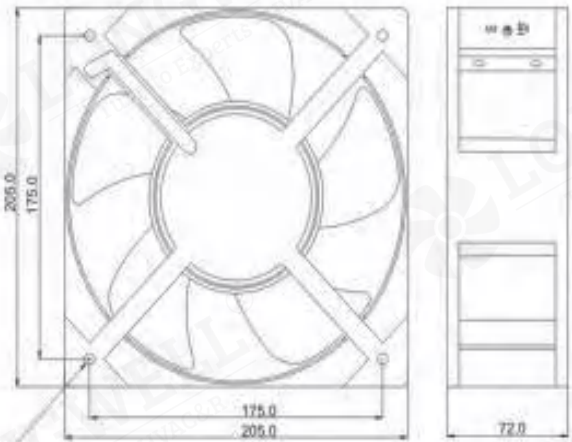

LWFD4010 Serise


Product Characteristic

- Frame: Aluminum Alloy, Painted black
- Impeller: Plastic (UL94V-0)
- Lead Wire: UL1007AWG#28 or Equivalent (+)Red, (-)Black
- Ball Bearing: 50,000hrs(40°C)
- Operating Temperature: -10°C~+70°C
- Storage Temperature: -40°C~+70°C



Technical Specifications


Model	Bearing Type	Rated Voltage(VDC)	Operating Voltage(VDC)	Input Current(A)	Input Power(W)	Speed (RPM)	Max Air Flow (CFM)	Max Air Flow (m³/min)	Max Static Pressure (Inch-H₂O)	Max Static Pressure (Pa)	Noise [dB(A)]	Weight (g)
LWFD4010KH-06	B.S	5	3.5~5.5	0.23	1.15	5000	3.06	0.09	0.29	72.57	27.0	21.0
LWFD4010KM-07	B.S	5	3.5~5.5	0.20	1.00	4500	2.64	0.07	0.21	52.37	25.0	21.0
LWFD4010KL-08	B.S	5	3.5~5.5	0.16	0.80	4000	2.23	0.06	0.15	37.85	23.0	21.0
LWFD4010LX-06	B.S	12	7.0~13.8	0.18	2.16	5500	3.12	0.09	0.31	77.08	29.0	21.0
LWFD4010LH-07	B.S	12	7.0~13.8	0.15	1.80	5000	3.06	0.09	0.29	72.57	27.0	21.0
LWFD4010LM-08	B.S	12	7.0~13.8	0.12	1.44	4500	2.64	0.07	0.21	52.37	25.0	21.0
LWFD4010LL-09	B.S	12	7.0~13.8	0.10	1.20	4000	2.23	0.06	0.15	37.85	23.0	21.0
LWFD4010MX-06	B.S	24	14.0~27.6	0.10	2.40	5500	3.12	0.09	0.31	77.08	29.0	21.0
LWFD4010MH-07	B.S	24	14.0~27.6	0.07	1.68	5000	3.06	0.09	0.29	72.57	27.0	21.0
LWFD4010MM-08	B.S	24	14.0~27.6	0.05	1.20	4500	2.64	0.07	0.21	52.37	25.0	21.0
LWFD4010ML-09	B.S	24	14.0~27.6	0.03	0.72	4000	2.23	0.06	0.15	37.85	23.0	21.0

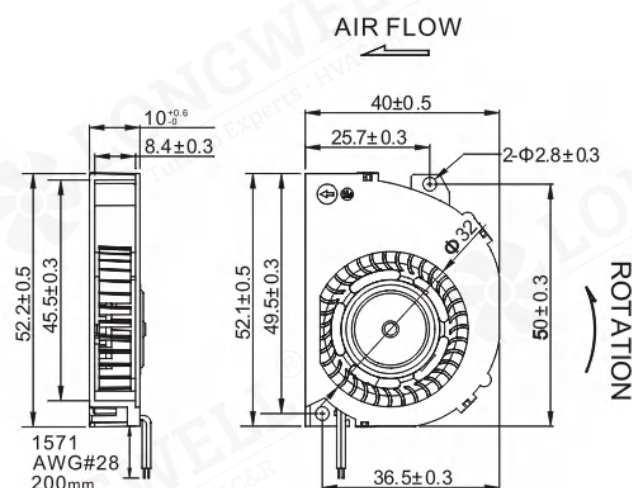

LWFD4510 Serise

Product Characteristic

- Frame: Plastic (UL94V-0)
- Impeller: Plastic (UL94V-0)
- Lead Wire: UL1571AWG#28 or Equivalent (+)Red, (-)Black
- Ball Bearing: 50,000hrs(40°C)
- Sleeve Bearing: 30,000hrs(40°C)
- Operating Temperature: -10°C~+70°C
- Storage Temperature: -40°C~+70°C

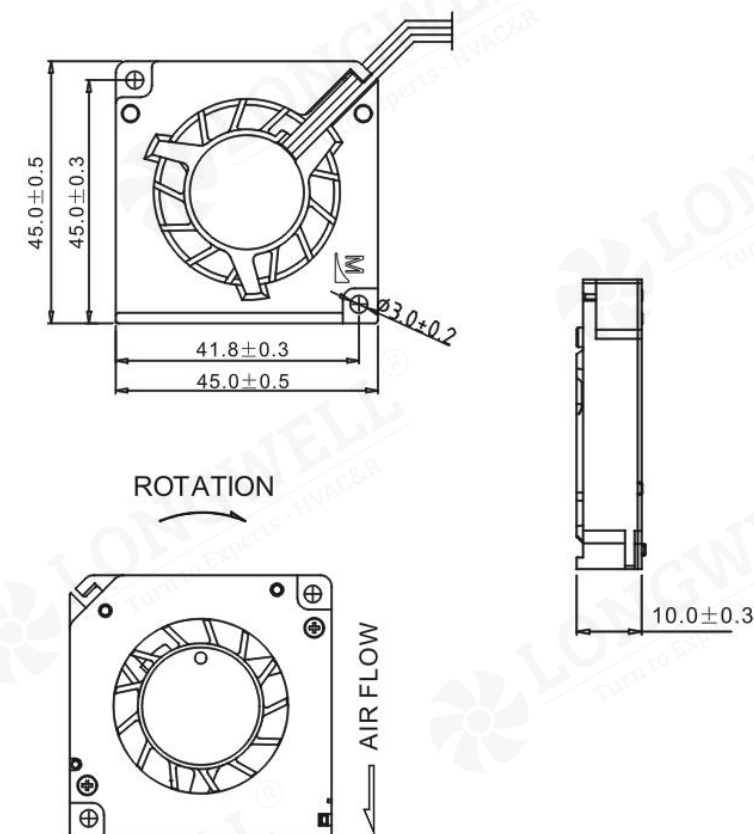

LWFD5015 Serise


Product Characteristic

- Frame: Plastic(UL94V-0)
- Impeller: Plastic(UL94V-0)
- Lead Wire: UL1007AWG#26 or Equivalent (+)Red,(-)Black
- Ball Bearing: 50,000hrs(40°C)
- Sleeve Bearing: 30,000hrs(40°C)
- Operating Temperature: -10°C~+70°C
- Storage Temperature: -40°C~+70°C



Technical Specifications

Model	Bearing Type	Rated Voltage(VDC)	Operating Voltage(VDC)	Input Current(A)	Input Power(W)	Speed (RPM)	Max Air Flow (CFM)	(m³/min)	Max Static Pressure (Inch-H₂O)	(Pa)	Noise [dB(A)]	Weight (g)
LWFD5015KH-06	B.S	5	3.5~5.5	0.45	2.25	5500	3.49	0.10	0.35	87.97	38.0	30.0
LWFD5015KM-07	B.S	5	3.5~5.5	0.35	1.75	5000	3.21	0.09	0.29	71.59	34.0	30.0
LWFD5015KL-08	B.S	5	3.5~5.5	0.25	1.25	4500	2.86	0.08	0.24	60.21	27.0	30.0
LWFD5015LH-06	B.S	12	7.0~13.8	0.18	2.16	5500	3.49	0.10	0.35	87.97	38.0	30.0
LWFD5015LM-07	B.S	12	7.0~13.8	0.15	1.80	5000	3.21	0.09	0.29	71.59	34.0	30.0
LWFD5015LL-08	B.S	12	7.0~13.8	0.12	1.44	4500	2.86	0.08	0.24	60.21	27.0	30.0
LWFD5015MH-06	B.S	24	14.0~27.6	0.10	2.40	5500	3.49	0.10	0.35	87.97	38.0	30.0
LWFD5015MM-07	B.S	24	14.0~27.6	0.08	1.92	5000	3.21	0.09	0.29	71.59	34.0	30.0
LWFD5015ML-08	B.S	24	14.0~27.6	0.06	1.44	4500	2.86	0.08	0.24	60.21	27.0	30.0

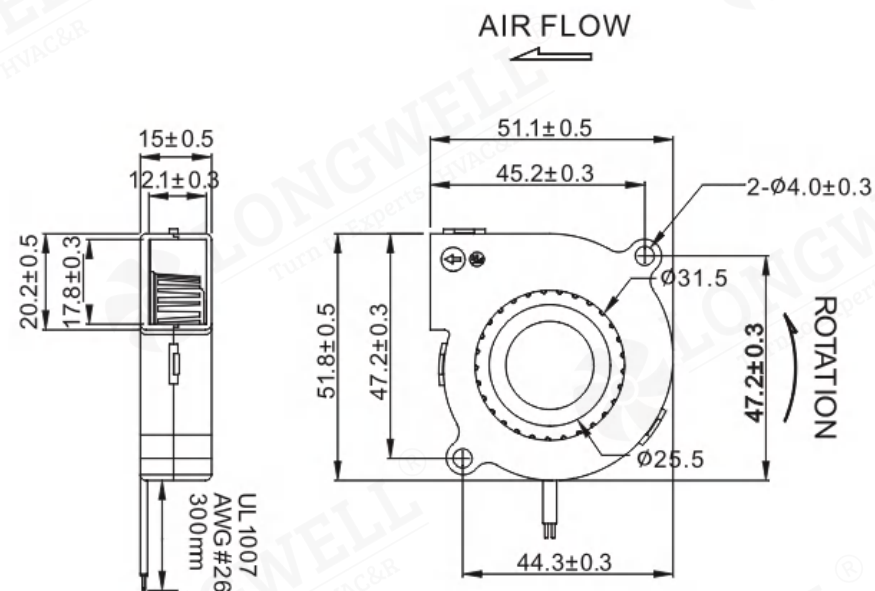

LWFD6018 Serise


Product Characteristic

- Frame: Plastic(UL94V-0)
- Impeller: Plastic(UL94V-0)
- Lead Wire: UL1007AWG#26 or Equivalent (+)Red,(-)Black
- Ball Bearing: 50,000hrs(40°C)
- Sleeve Bearing: 30,000hrs(40°C)
- Operating Temperature: -10°C~+70°C
- Storage Temperature: -40°C~+70°C



Technical Specifications

Model	Bearing Type	Rated Voltage(VDC)	Operating Voltage(VDC)	Input Current(A)	Input Power(W)	Speed (RPM)	Max Air Flow (CFM)	(m³/min)	Max Static Pressure (Inch-H₂O)	(Pa)	Noise [dB(A)]	Weight (g)
LWFD6018KM-01	B.S	5	3.5~5.5	0.36	1.80	4500	5.09	0.14	0.42	104.54	39.0	41.0
LWFD6018KL-02	B.S	5	3.5~5.5	0.24	1.20	3500	4.06	0.11	0.25	62.37	34.0	41.0
LWFD6018LH-01	B.S	12	7.0~13.8	0.30	3.60	5500	5.89	0.17	0.71	176.81	43.0	41.0
LWFD6018LM-02	B.S	12	7.0~13.8	0.20	2.40	4500	5.09	0.14	0.42	104.54	39.0	41.0
LWFD6018LL-03	B.S	12	7.0~13.8	0.15	1.80	3500	4.06	0.11	0.25	62.37	34.0	41.0
LWFD6018MH-01	B.S	24	14.0~27.6	0.20	4.80	5500	5.89	0.17	0.71	176.81	43.0	41.0
LWFD6018MM-02	B.S	24	14.0~27.6	0.12	2.88	4500	5.09	0.14	0.42	104.54	39.0	41.0
LWFD6018ML-03	B.S	24	14.0~27.6	0.08	1.92	3500	4.06	0.11	0.25	62.37	34.0	41.0

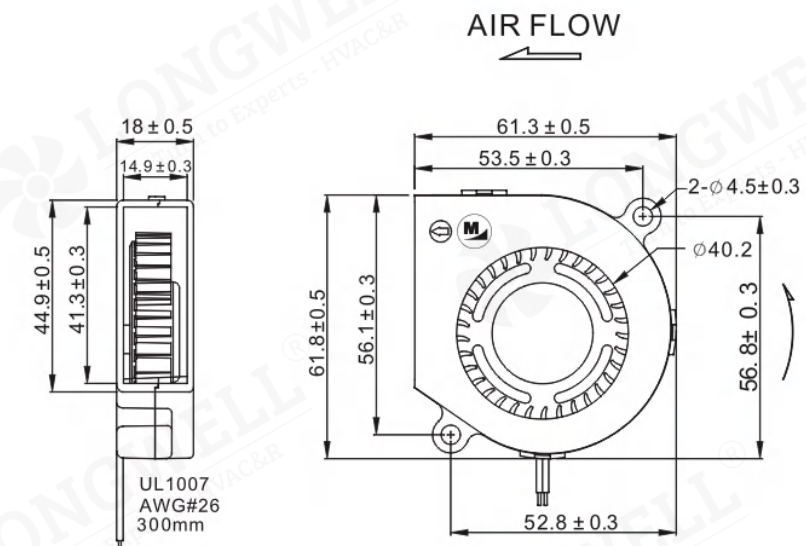

LWFD7530 Serise


Product Characteristic

- Frame: Plastic(UL94V-0)
- Impeller: Plastic(UL94V-0)
- Lead Wire: UL1007AWG#24 or Equivalent (+)Red,(-)Black
- Ball Bearing: 50,000hrs(40°C)
- Sleeve Bearing: 30,000hrs(40°C)
- Operating Temperature: -10°C~+70°C
- Storage Temperature: -40°C~+70°C



Technical Specifications

Model	Bearing Type	Rated Voltage(VDC)	Operating Voltage(VDC)	Input Current(A)	Input Power(W)	Speed (RPM)	Max Air Flow (CFM)	Max Air Flow (m³/min)	Max Static Pressure (Inch-H₂O)	Max Static Pressure (Pa)	Noise [dB(A)]	Weight (g)
LWFD7530LH-06	B.S	12	7.0~13.8	0.60	7.20	4500	15.64	0.44	1.06	263.31	51.0	69.0
LWFD7530LM-07	B.S	12	7.0~13.8	0.45	5.40	4000	13.67	0.39	0.81	201.13	46.0	69.0
LWFD7530LL-08	B.S	12	7.0~13.8	0.35	4.20	3500	12.25	0.35	0.60	149.55	40.0	69.0
LWFD7530MH-06	B.S	24	14.0~27.6	0.30	7.20	4500	15.64	0.44	1.06	263.31	51.0	69.0
LWFD7530MM-07	B.S	24	14.0~27.6	0.25	6.00	4000	13.67	0.39	0.81	201.13	46.0	69.0
LWFD7530ML-08	B.S	24	14.0~27.6	0.20	4.80	3500	12.25	0.35	0.60	149.55	40.0	69.0

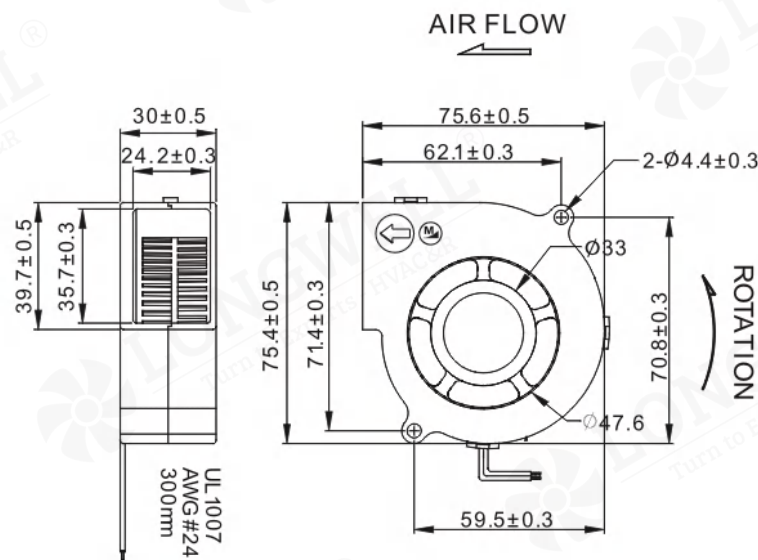

LWFD9733 Serise


Product Characteristic

- Frame: Plastic(UL94V-0)
- Impeller: Plastic(UL94V-0)
- Lead Wire: UL1007AWG#24 or Equivalent (+)Red,(-)Black
- Ball Bearing: 50,000hrs(40°C)
- Sleeve Bearing: 30,000hrs(40°C)
- Operating Temperature: -10°C~+70°C
- Storage Temperature: -40°C~+70°C



Technical Specifications

Model	Bearing Type	Rated Voltage(VDC)	Operating Voltage(VDC)	Input Current(A)	Input Power(W)	Speed (RPM)	Max Air Flow (CFM)	Max Air Flow (m³/min)	Max Static Pressure (Inch-H₂O)	Max Static Pressure (Pa)	Noise [dB(A)]	Weight (g)
LWFD9733LX-06	B.S	12	7.0~13.8	1.40	16.80	4500	29.76	0.84	1.35	336.96	57.0	164.0
LWFD9733LH-07	B.S	12	7.0~13.8	1.00	12.00	4000	26.62	0.75	1.15	286.75	53.0	164.0
LWFD9733LM-08	B.S	12	7.0~13.8	0.60	7.20	3500	23.34	0.66	0.83	206.33	49.0	164.0
LWFD9733LL-09	B.S	12	7.0~13.8	0.40	4.80	3000	19.71	0.56	0.53	132.59	45.0	164.0
LWFD9733MX-06	B.S	24	14.0~27.6	1.00	24.00	4500	29.76	0.84	1.35	336.96	57.0	164.0
LWFD9733MH-07	B.S	24	14.0~27.6	0.80	19.20	4000	26.62	0.75	1.15	286.75	53.0	164.0
LWFD9733MM-08	B.S	24	14.0~27.6	0.50	12.00	3500	23.34	0.66	0.83	206.33	49.0	164.0
LWFD9733ML-09	B.S	24	14.0~27.6	0.30	7.20	3000	19.71	0.56	0.53	132.59	45.0	164.0

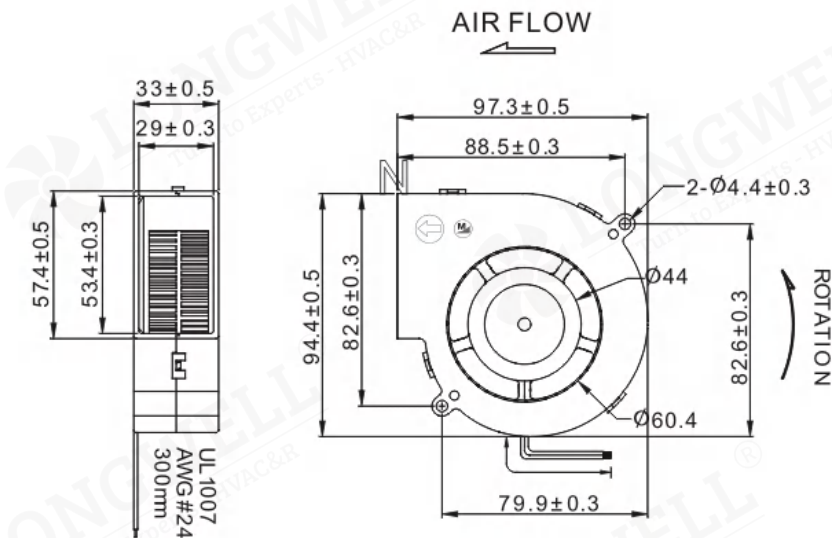

LWFD12032 Serise


Product Characteristic

- Frame: Plastic(UL94V-0)
- Impeller: Plastic(UL94V-0)
- Lead Wire: UL1007AWG#24 or Equivalent (+)Red,(-)Black
- Ball Bearing: 50,000hrs(40°C)
- Sleeve Bearing: 30,000hrs(40°C)
- Operating Temperature: -10°C~+70°C
- Storage Temperature: -40°C~+70°C



Technical Specifications

Model	Bearing Type	Rated Voltage(VDC)	Operating Voltage(VDC)	Input Current(A)	Input Power(W)	Speed (RPM)	Max Air Flow (CFM)	Max Air Flow (m³/min)	Max Static Pressure (Inch-H₂O)	Max Static Pressure (Pa)	Noise [dB(A)]	Weight (g)
LWFD12032LH-06	B	12	7.0~13.8	2.00	24.00	3500	41.20	1.17	1.85	461.99	57.0	278.0
LWFD12032LM-07	B	12	7.0~13.8	1.00	12.00	3000	35.44	1.00	1.17	291.94	51.0	278.0
LWFD12032LL-08	B	12	7.0~13.8	0.70	8.40	2500	30.79	0.87	0.83	207.90	45.0	278.0
LWFD12032MH-06	B	24	14.0~27.6	1.00	24.00	3500	41.20	1.17	1.85	461.99	57.0	278.0
LWFD12032MM-07	B	24	14.0~27.6	0.70	16.80	3000	35.44	1.00	1.17	291.94	51.0	278.0
LWFD12032ML-08	BB	24	14.0~27.6	0.40	9.60	2500	30.79	0.87	0.83	207.90	45.0	278.0

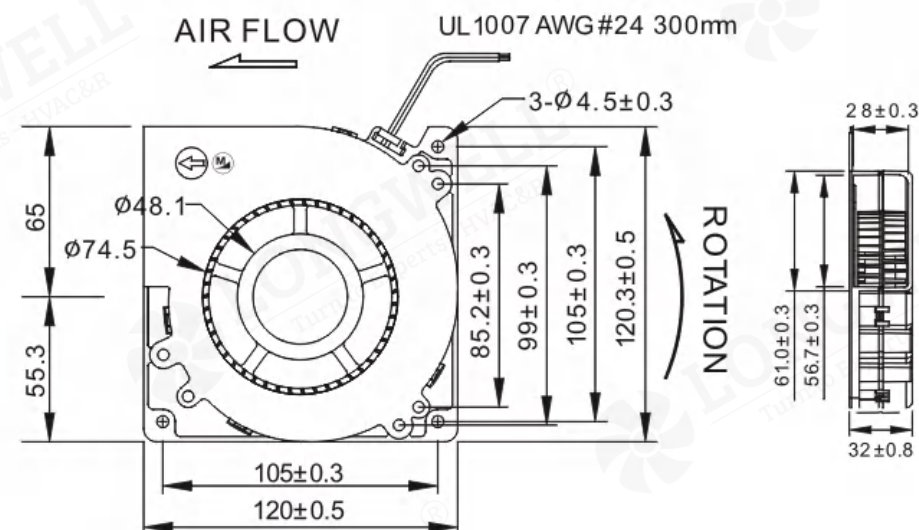

LWFD4010 Serise



Product Characteristic

- Frame: Plastic(UL94)
- Impeller: Plastic(UL94)
- Bearing Type: Sleeve Bearing (EBI)
Fluid Dynamic Bearing (FDB)
Two Ball Bearings



Technical Specifications

Model	Rated Voltage (VDC)	Rated Current (A)	Rated Input Power(W)	Rated Speed (RPM)	Maximum Air Flow(CFM)	Maximum Air Pressure(mmH₂O)	Noise [dB(A)]
LWFD4010KM-09	5	0.24	1.20	6000	2.31	10.56	28.50
LWFD4010LM-10	12	0.10	1.20	6000	2.31	10.56	28.50

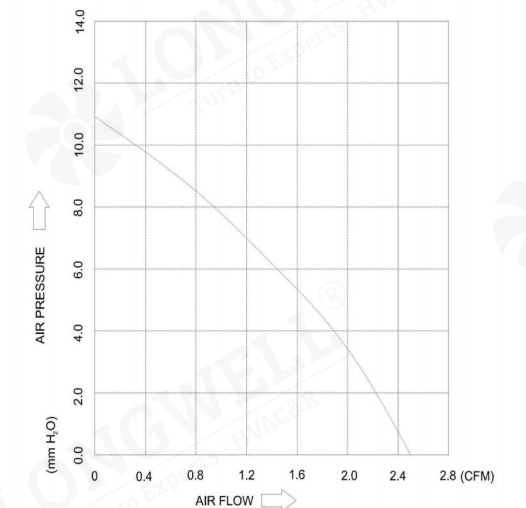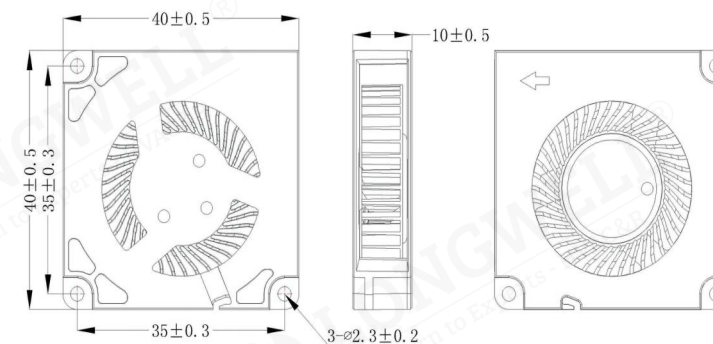

LWFD4508 Serise



Product Characteristic

- Frame: Plastic(UL94)
- Impeller: Plastic(UL94)
- Bearing Type: Sleeve Bearing (EBI)
Fluid Gynamic Bearing (FDB)
Two Ball Bearings



Technical Specifications

Model	Rated Voltage (VDC)	Rated Current (A)	Rated Input Power(W)	Rated Speed (RPM)	Maximum Air Flow(CFM)	Maximum Air Pressure(mmH ₂ O)	Noise [dB(A)]
LWFD4508KL-01	5	0.10	0.50	4000	1.17	4.70	20.90
LWFD4508LL-01	12	0.06	0.72	4000	1.17	4.70	20.90
LWFD4508KM-02	5	0.15	0.75	5000	1.46	7.35	22.80
LWFD4508LM-02	12	0.15	1.80	5000	1.46	7.35	22.80
LWFD4508KH-03	5	0.35	1.75	5800	1.70	9.89	26.00
LWFD4508LH-03	12	0.25	3.00	5800	1.70	9.89	26.00
LWFD4508KH-04	5	0.36	1.80	6000	1.75	10.20	26.80

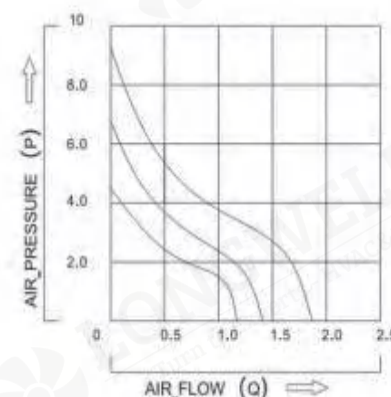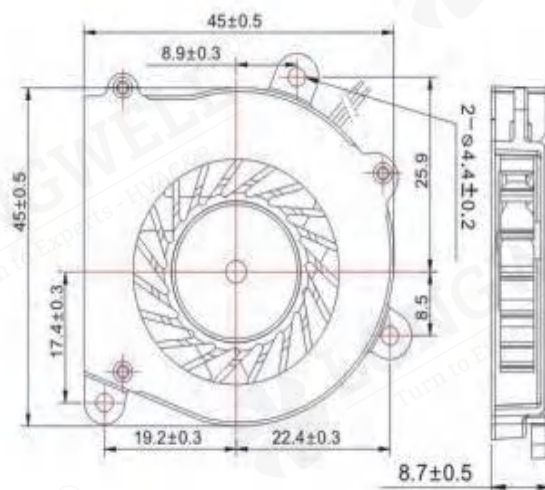

LWFD4520 Serise



Product Characteristic

- Frame: Plastic(UL94)
- Impeller: Plastic(UL94)
- Bearing Type: Sleeve Bearing (EBI)
Fluid Gynamic Bearing (FDB)
Two Ball Bearings



Technical Specifications

Model	Rated Voltage (VDC)	Rated Current (A)	Rated Input Power(W)	Rated Speed (RPM)	Maximum Air Flow(CFM)	Maximum Air Pressure(mmH ₂ O)	Noise [dB(A)]
LWFD4520KL-01	5	0.20	1.00	4800	2.94	5.30	27.00
LWFD4520LL-01	12	0.10	1.20	4800	2.94	5.30	27.00
LWFD4520KM-02	5	0.30	1.50	5700	3.50	6.40	30.00
LWFD4520LM-02	12	0.15	1.80	5700	3.50	6.40	30.00
LWFD4520MM-01	24	0.08	1.92	5700	3.50	6.40	30.00
LWFD4520LH-03	12	0.20	2.40	6500	4.00	7.30	33.00
LWFD4520MH-02	24	0.10	2.40	6500	4.00	7.30	33.00

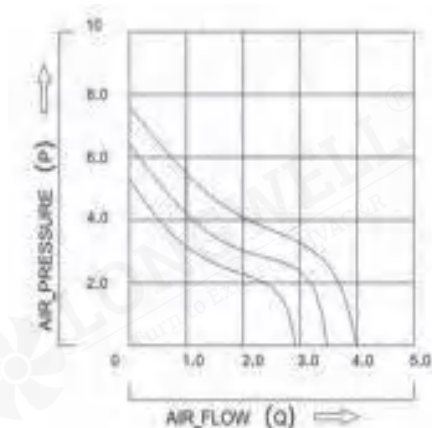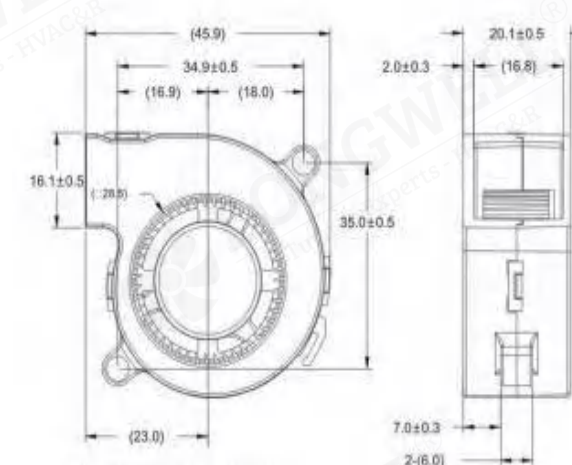

LWFD5010 Serise



Product Characteristic

- Frame: Plastic(UL94)
- Impeller: Plastic(UL94)
- Bearing Type: Sleeve Bearing (EBI)
Fluid Gynamic Bearing (FDB)
Two Ball Bearings



Technical Specifications

Model	Rated Voltage (VDC)	Rated Current (A)	Rated Input Power(W)	Rated Speed (RPM)	Maximum Air Flow(CFM)	Maximum Air Pressure(mmH ₂ O)	Noise [dB(A)]
LWFD5010KL-09	5	0.10	0.50	4000	1.87	3.18	22.50
LWFD5010LL-09	12	0.06	0.72	4000	1.87	3.18	22.50
LWFD5010ML-09	24	0.04	0.96	4000	1.87	3.18	22.50
LWFD5010KM-10	5	0.15	0.75	5000	2.40	5.64	28.00
LWFD5010LM-10	12	0.10	1.20	5000	2.40	5.64	28.00
LWFD5010MM-10	24	0.06	1.44	5000	2.40	5.64	28.00
LWFD5010LH-11	12	0.15	1.80	6000	3.05	9.47	32.50
LWFD5010MH-11	24	0.10	2.40	6000	3.05	9.47	32.50
LWFD5010LH-12	12	0.22	2.64	7000	3.88	13.46	37.50
LWFD5010MH-12	24	0.12	2.88	7000	3.88	13.46	37.50

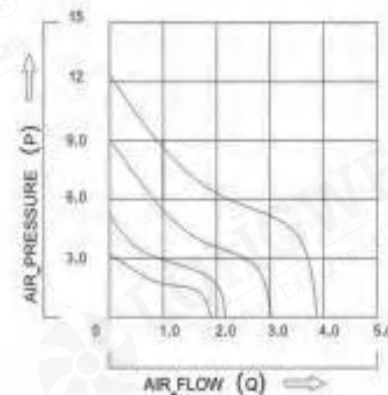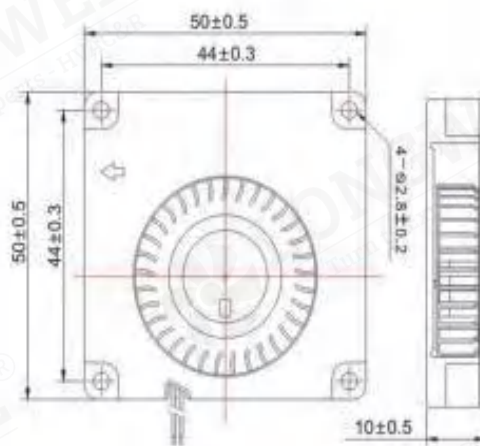

LWFD5015 Serise



Product Characteristic

- Frame: Plastic(UL94)
- Impeller: Plastic(UL94)
- Bearing Type: Sleeve Bearing (EBI)
Fluid Gynamic Bearing (FDB)
Two Ball Bearings



Technical Specifications

Model	Rated Voltage (VDC)	Rated Current (A)	Rated Input Power(W)	Rated Speed (RPM)	Maximum Air Flow(CFM)	Maximum Air Pressure(mmH ₂ O)	Noise [dB(A)]
LWFD5015LL-06	12	0.08	0.96	2600	1.83	3.86	21.00
LWFD5015KL-06	5	0.18	0.90	3500	2.47	7.00	26.50
LWFD5015LL-07	12	0.10	1.20	3500	2.47	7.00	26.50
LWFD5015ML-06	24	0.05	1.20	3500	2.47	7.00	26.50
LWFD5015KM-07	5	0.30	1.50	4500	3.18	11.00	32.50
LWFD5015LM-08	12	0.14	1.68	4500	3.18	11.00	32.50
LWFD5015MM-07	24	0.07	1.68	4500	3.18	11.00	32.50
LWFD5015LH-09	12	0.18	2.16	5500	3.88	18.00	38.00
LWFD5015MH-08	24	0.10	2.40	5500	3.88	18.00	38.00
LWFD5015LH-10	12	0.22	2.64	6500	4.59	22.00	45.00
LWFD5015MH-09	24	0.13	3.12	6500	4.59	22.00	45.00

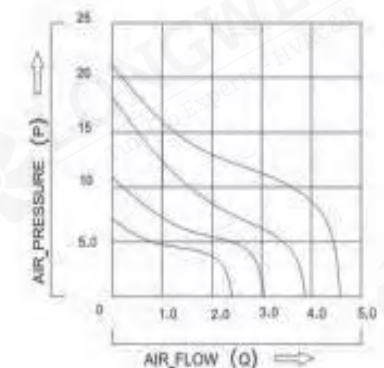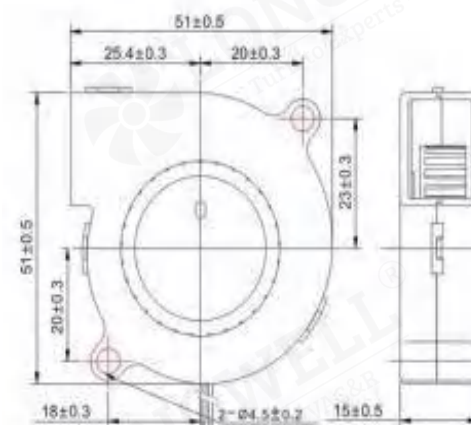

LWFD6015 Serise



Product Characteristic

- Frame: Plastic(UL94)
- Impeller: Plastic(UL94)
- Bearing Type: Sleeve Bearing (EBI)
Fluid Gynamic Bearing (FDB)
Two Ball Bearings



Technical Specifications

Model	Rated Voltage (VDC)	Rated Current (A)	Rated Input Power(W)	Rated Speed (RPM)	Maximum Air Flow(CFM)	Maximum Air Pressure(mmH ₂ O)	Noise [dB(A)]
LWFD6015KL-06	5	0.22	1.10	3000	3.12	6.48	26.50
LWFD6015LL-06	12	0.15	1.80	3000	3.12	6.48	26.50
LWFD6015ML-06	24	0.10	2.40	3000	3.12	6.48	26.50
LWFD6015KM-07	5	0.25	1.25	3600	3.50	9.01	29.80
LWFD6015LM-07	12	0.18	2.16	3600	3.50	9.01	29.80
LWFD6015MM-07	24	0.13	3.12	3600	3.50	9.01	29.80
LWFD6015LH-08	12	0.20	2.40	4200	4.04	12.08	32.50
LWFD6015MH-08	24	0.15	3.60	4200	4.04	12.08	32.50
LWFD6015LH-09	12	3.12	3.60	5000	4.86	17.95	38.00
LWFD6015MH-09	24	0.20	4.80	5000	4.86	17.95	38.00

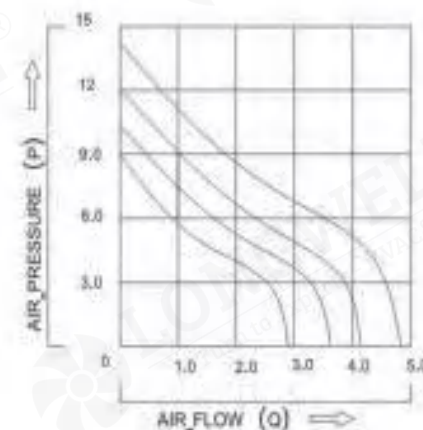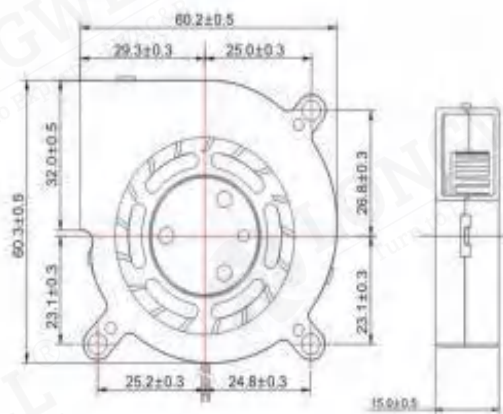

LWFD7530 Serise



Product Characteristic

- Frame: Plastic(UL94)
- Impeller: Plastic(UL94)
- Bearing Type: Sleeve Bearing (EBI)
Fluid Gynamic Bearing (FDB)
Two Ball Bearings



Technical Specifications

Model	Rated Voltage (VDC)	Rated Current (A)	Rated Input Power(W)	Rated Speed (RPM)	Maximum Air Flow(CFM)	Maximum Air Pressure(mmH ₂ O)	Noise [dB(A)]
LWFD7530KL-01	5	0.30	1.50	2500	9.30	7.80	31.50
LWFD7530LL-09	12	0.18	2.16	2500	9.30	7.80	31.50
LWFD7530ML-09	24	0.18	2.16	2500	9.30	7.80	31.50
LWFD7530LM-10	12	0.26	3.12	2900	11.00	11.95	36.50
LWFD7530MM-10	24	0.13	3.12	2900	11.00	11.95	36.50
LWFD7530LH-11	12	0.30	3.60	3200	12.10	14.10	39.50
LWFD7530MH-11	24	0.15	3.60	3200	12.10	14.10	39.50
LWFD7530LH-12	12	0.36	4.32	3900	13.80	17.00	44.30
LWFD7530MH-12	24	0.18	4.32	3900	13.80	17.00	44.30

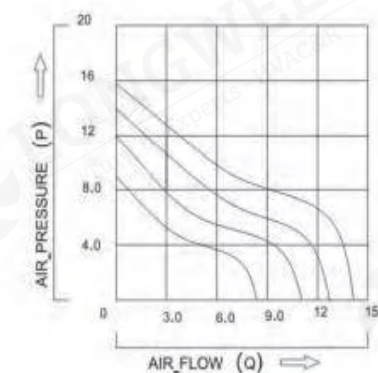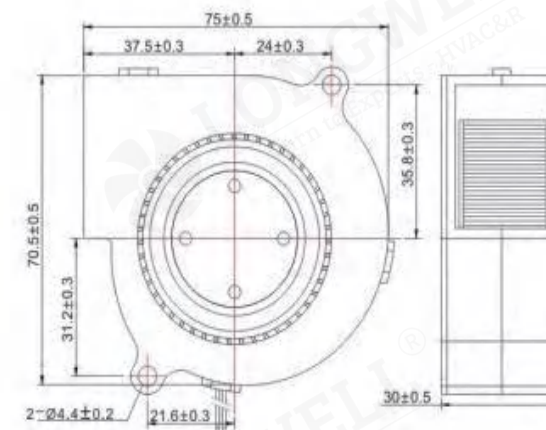

LWFD7530 Serise



Product Characteristic

- Frame: Plastic(UL94)
- Impeller: Plastic(UL94)
- Bearing Type: Sleeve Bearing (EBI)
Fluid Dynamic Bearing (FDB)
Two Ball Bearings



Technical Specifications

Model	Rated Voltage (VDC)	Rated Current (A)	Rated Input Power(W)	Rated Speed (RPM)	Maximum Air Flow(CFM)	Maximum Air Pressure(mmH ₂ O)	Noise [dB(A)]
LWFD7530LH-13	12	0.24	2.88	4000	14.15	22.83	45.00

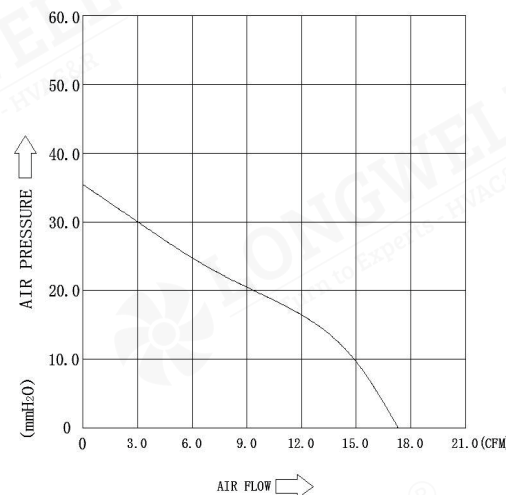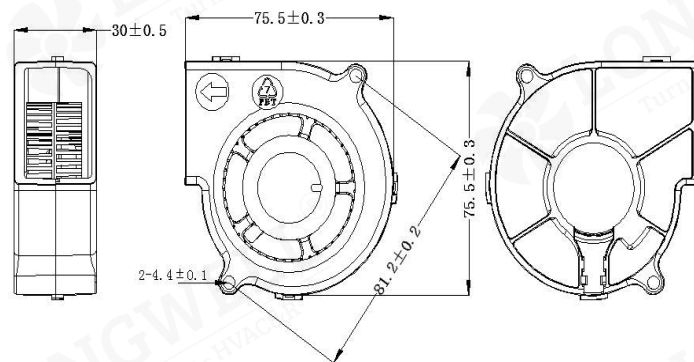

LWFD9733 Serise



Product Characteristic

- Frame: Plastic(UL94)
- Impeller: Plastic(UL94)
- Bearing Type: Sleeve Bearing (EBI)
Fluid Dynamic Bearing (FDB)
Two Ball Bearings



Technical Specifications

Model	Rated Voltage (VDC)	Rated Current (A)	Rated Input Power(W)	Rated Speed (RPM)	Maximum Air Flow(CFM)	Maximum Air Pressure(mmH ₂ O)	Noise [dB(A)]
LWFD9733LL-10	12	0.26	3.12	2400	16.55	9.40	41.00
LWFD9733ML-10	24	0.13	3.12	2400	16.55	9.40	41.00
LWFD9733LM-11	12	0.35	4.20	2800	19.30	13.45	45.00
LWFD9733MM-11	24	0.18	4.32	2800	19.30	13.45	45.00
LWFD9733LH-12	12	0.46	5.52	3000	20.68	15.50	46.50
LWFD9733MH-12	24	0.23	5.52	3000	20.68	15.50	46.50
LWFD9733LH-13	12	0.50	6.00	3200	22.10	18.50	49.00
LWFD9733MH-13	24	0.28	6.72	3200	22.10	18.50	49.00
LWFD9733LH-14	12	0.80	9.60	3600	25.40	24.85	52.00
LWFD9733MH-14	24	0.40	9.60	3600	25.40	24.85	52.00

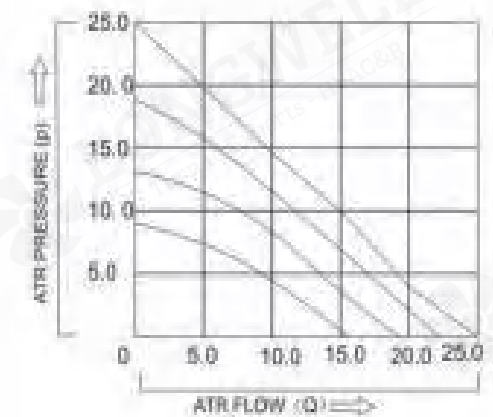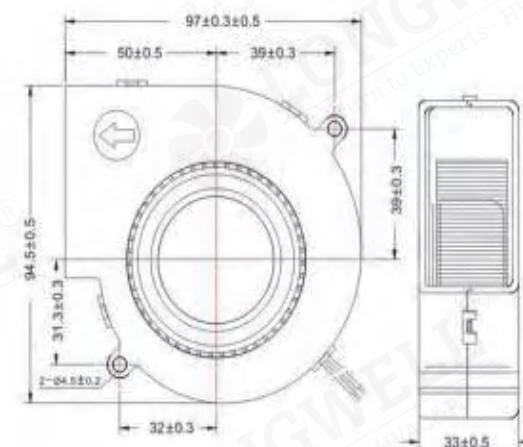

LWFD12032 Serise



Product Characteristic

- Frame: Plastic(UL94)
- Impeller: Plastic(UL94)
- Bearing Type: Sleeve Bearing (EBI)
Fluid Dynamic Bearing (FDB)
Two Ball Bearings



Technical Specifications

Model	Rated Voltage (VDC)	Rated Current (A)	Rated Input Power(W)	Rated Speed (RPM)	Maximum Air Flow(CFM)	Maximum Air Pressure(mmH ₂ O)	Noise [dB(A)]
LWFD12032LL-09	12	0.45	5.40	2100	24.66	14.00	46.00
LWFD12032ML-09	24	0.24	5.76	2100	24.66	14.00	46.00
LWFD12032HL-06	48	0.12	5.76	2100	24.66	14.00	46.00
LWFD12032LM-10	12	0.63	7.56	2300	26.80	17.46	48.00
LWFD12032MM-10	24	0.30	7.20	2300	26.80	17.46	48.00
LWFD12032HM-07	48	0.15	7.20	2300	26.80	17.46	48.00
LWFD12032LH-11	12	0.85	10.20	2500	28.94	21.10	50.50
LWFD12032MH-11	24	0.36	8.64	2500	28.94	21.10	50.50
LWFD12032HH-08	48	0.18	8.64	2500	28.94	21.10	50.50
LWFD12032LH-12	12	1.10	13.20	2800	32.40	26.95	53.50
LWFD12032MH-12	24	0.50	12.00	2800	32.40	26.95	53.50
LWFD12032HH-09	48	0.25	12.00	2800	32.40	26.95	53.50
LWFD12032LX-13	12	1.25	15.00	3100	36.00	36.60	56.00
LWFD12032MX-13	24	0.63	15.12	3100	36.00	36.60	56.00
LWFD12032HX-10	48	0.30	14.40	3100	36.00	36.60	56.00

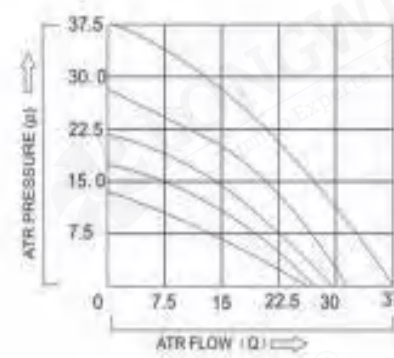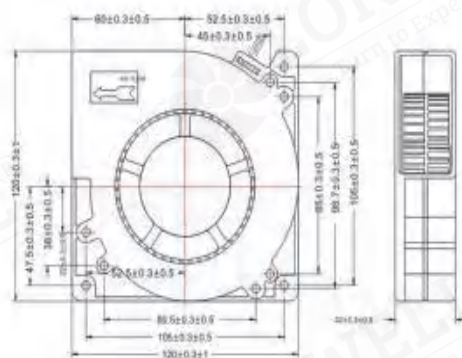

EC Axial Flow Fan

Professional HVAC Fan & Motors Manufacturer



LWAE6025 Serie



Product Characteristic

- Frame: Plastic(UL94)
- Impeller: Plastic(UL94)
- Bearing Type: Sleeve Bearing (EBI)
Fluid Dynamic Bearing (FDB)
Two Ball Bearings



Technical Specifications

Model	Rated Voltage (VDC)	Rated Current (A)	Rated Input Power(W)	Rated Speed (RPM)	Maximum Air Flow(CFM)	Maximum Air Pressure(mmH ₂ O)	Noise [dB(A)]
LWAE6025UH-01	110	0.16	3.60	4000	13.72	4.35	32.00
LWAE6025SH-04	220	0.15	4.20	4400	15.10	4.79	34.00

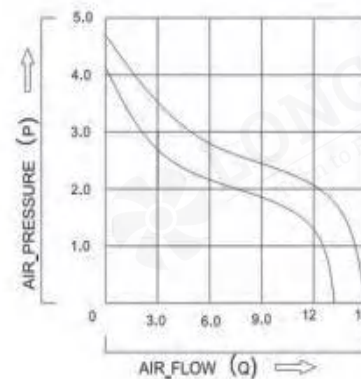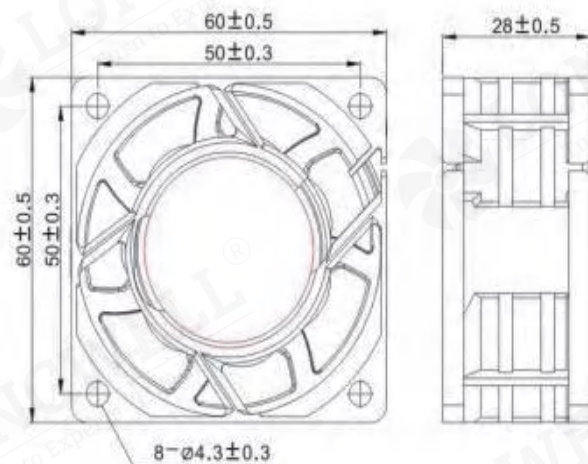

LWAE8025 Serie



Product Characteristic

- Frame: Plastic(UL94)
- Impeller: Plastic(UL94)
- Bearing Type: Sleeve Bearing (EBI)
Fluid Dynamic Bearing (FDB)
Two Ball Bearings



Technical Specifications

Model	Rated Voltage (VDC)	Rated Current (A)	Rated Input Power(W)	Rated Speed (RPM)	Maximum Air Flow(CFM)	Maximum Air Pressure(mmH ₂ O)	Noise [dB(A)]
LWAE8025UH-01	110	0.15	3.60	3000	34.20	3.55	34.00
LWAE8025SH-05	220	0.14	4.20	3200	36.50	3.32	36.00

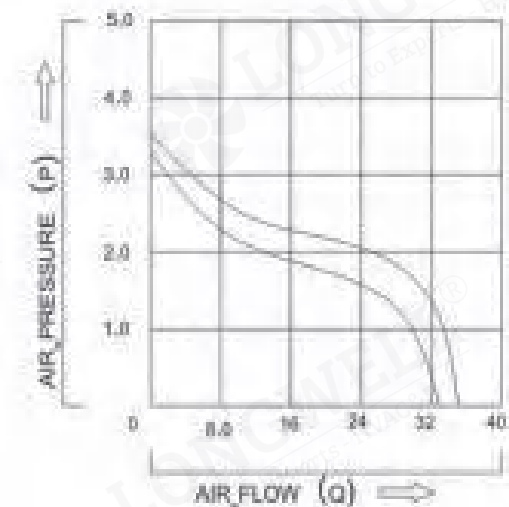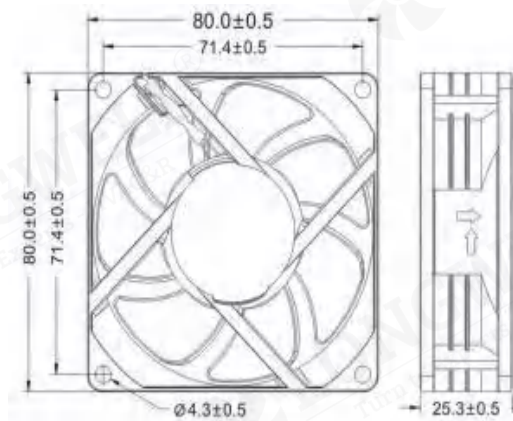

LWAE12025 Serise



Product Characteristic

- Frame: Plastic(UL94)
- Impeller: Plastic(UL94)
- Bearing Type: Sleeve Bearing (EBI)
Fluid Dynamic Bearing (FDB)
Two Ball Bearings



Technical Specifications

Model	Rated Voltage (VDC)	Frequency (A)	Rated Input Power(W)	Rated Speed (RPM)	Maximum Air Flow(CFM)	Maximum Air Pressure(mmH ₂ O)	Noise [dB(A)]
LWAE12025UM-01	110	45/65	3.12	2800	76.74	5.08	45.30
LWAE12025SM-04	220	45/65	3.12	2800	76.74	5.08	45.30
LWAE12025UH-02	110	45/65	5.40	3100	84.96	6.23	47.50
LWAE12025SH-05	220	45/65	5.40	3100	84.96	6.23	47.50

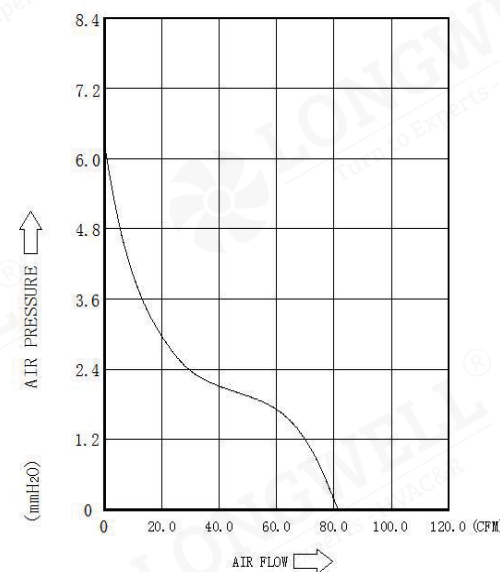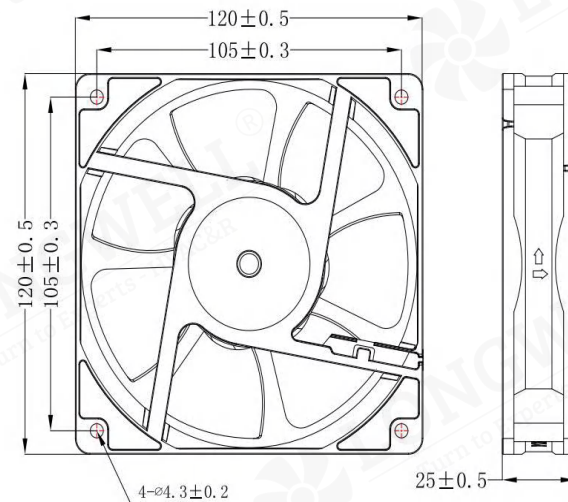

LWAE12032 Serise



Product Characteristic

- Frame: Plastic(UL94)
- Impeller: Plastic(UL94)
- Bearing Type: Sleeve Bearing (EBI)
Fluid Dynamic Bearing (FDB)
Two Ball Bearings



Technical Specifications

Model	Rated Voltage (VDC)	Rated Current (A)	Rated Input Power(W)	Rated Speed (RPM)	Maximum Air Flow(CFM)	Maximum Air Pressure(mmH ₂ O)	Noise [dB(A)]
LWAE12032UH-01	110	0.16	5.00	1500	17.61	10.00	35.00
LWAE12032SH-01	220	0.17	6.00	1500	17.61	10.00	35.00

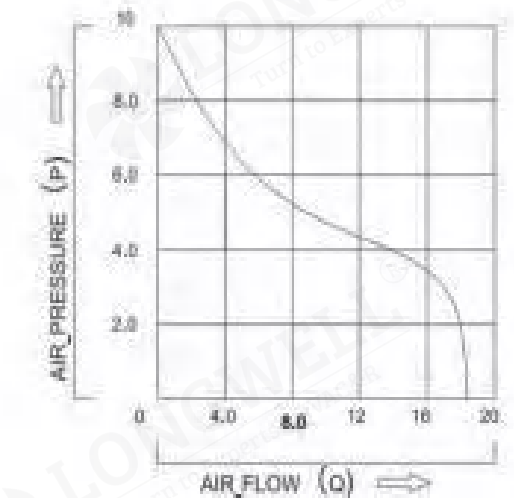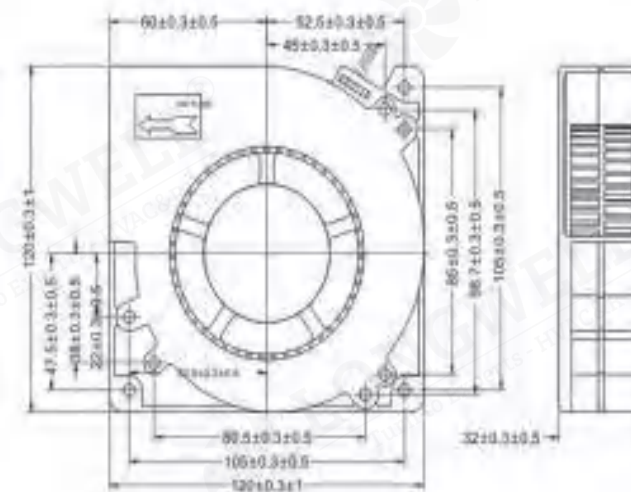

LWAE12038 Serise

Product Characteristic

- Frame: Plastic(UL94)
- Impeller: Plastic(UL94)
- Bearing Type: Sleeve Bearing (EBI)
Fluid Gynamic Bearing (FDB)
Two Ball Bearings



Technical Specifications

Model	Rated Voltage (VDC)	Rated Current (A)	Rated Input Power(W)	Rated Speed (RPM)	Maximum Air Flow(CFM)	Maximum Air Pressure(mmH ₂ O)	Noise [dB(A)]
LWAE12038UH-01	110	0.16	5.00	1600	67.80	3.65	28.00
LWAE12038SH-07	220	0.16	6.00	1600	67.80	3.65	28.00

