


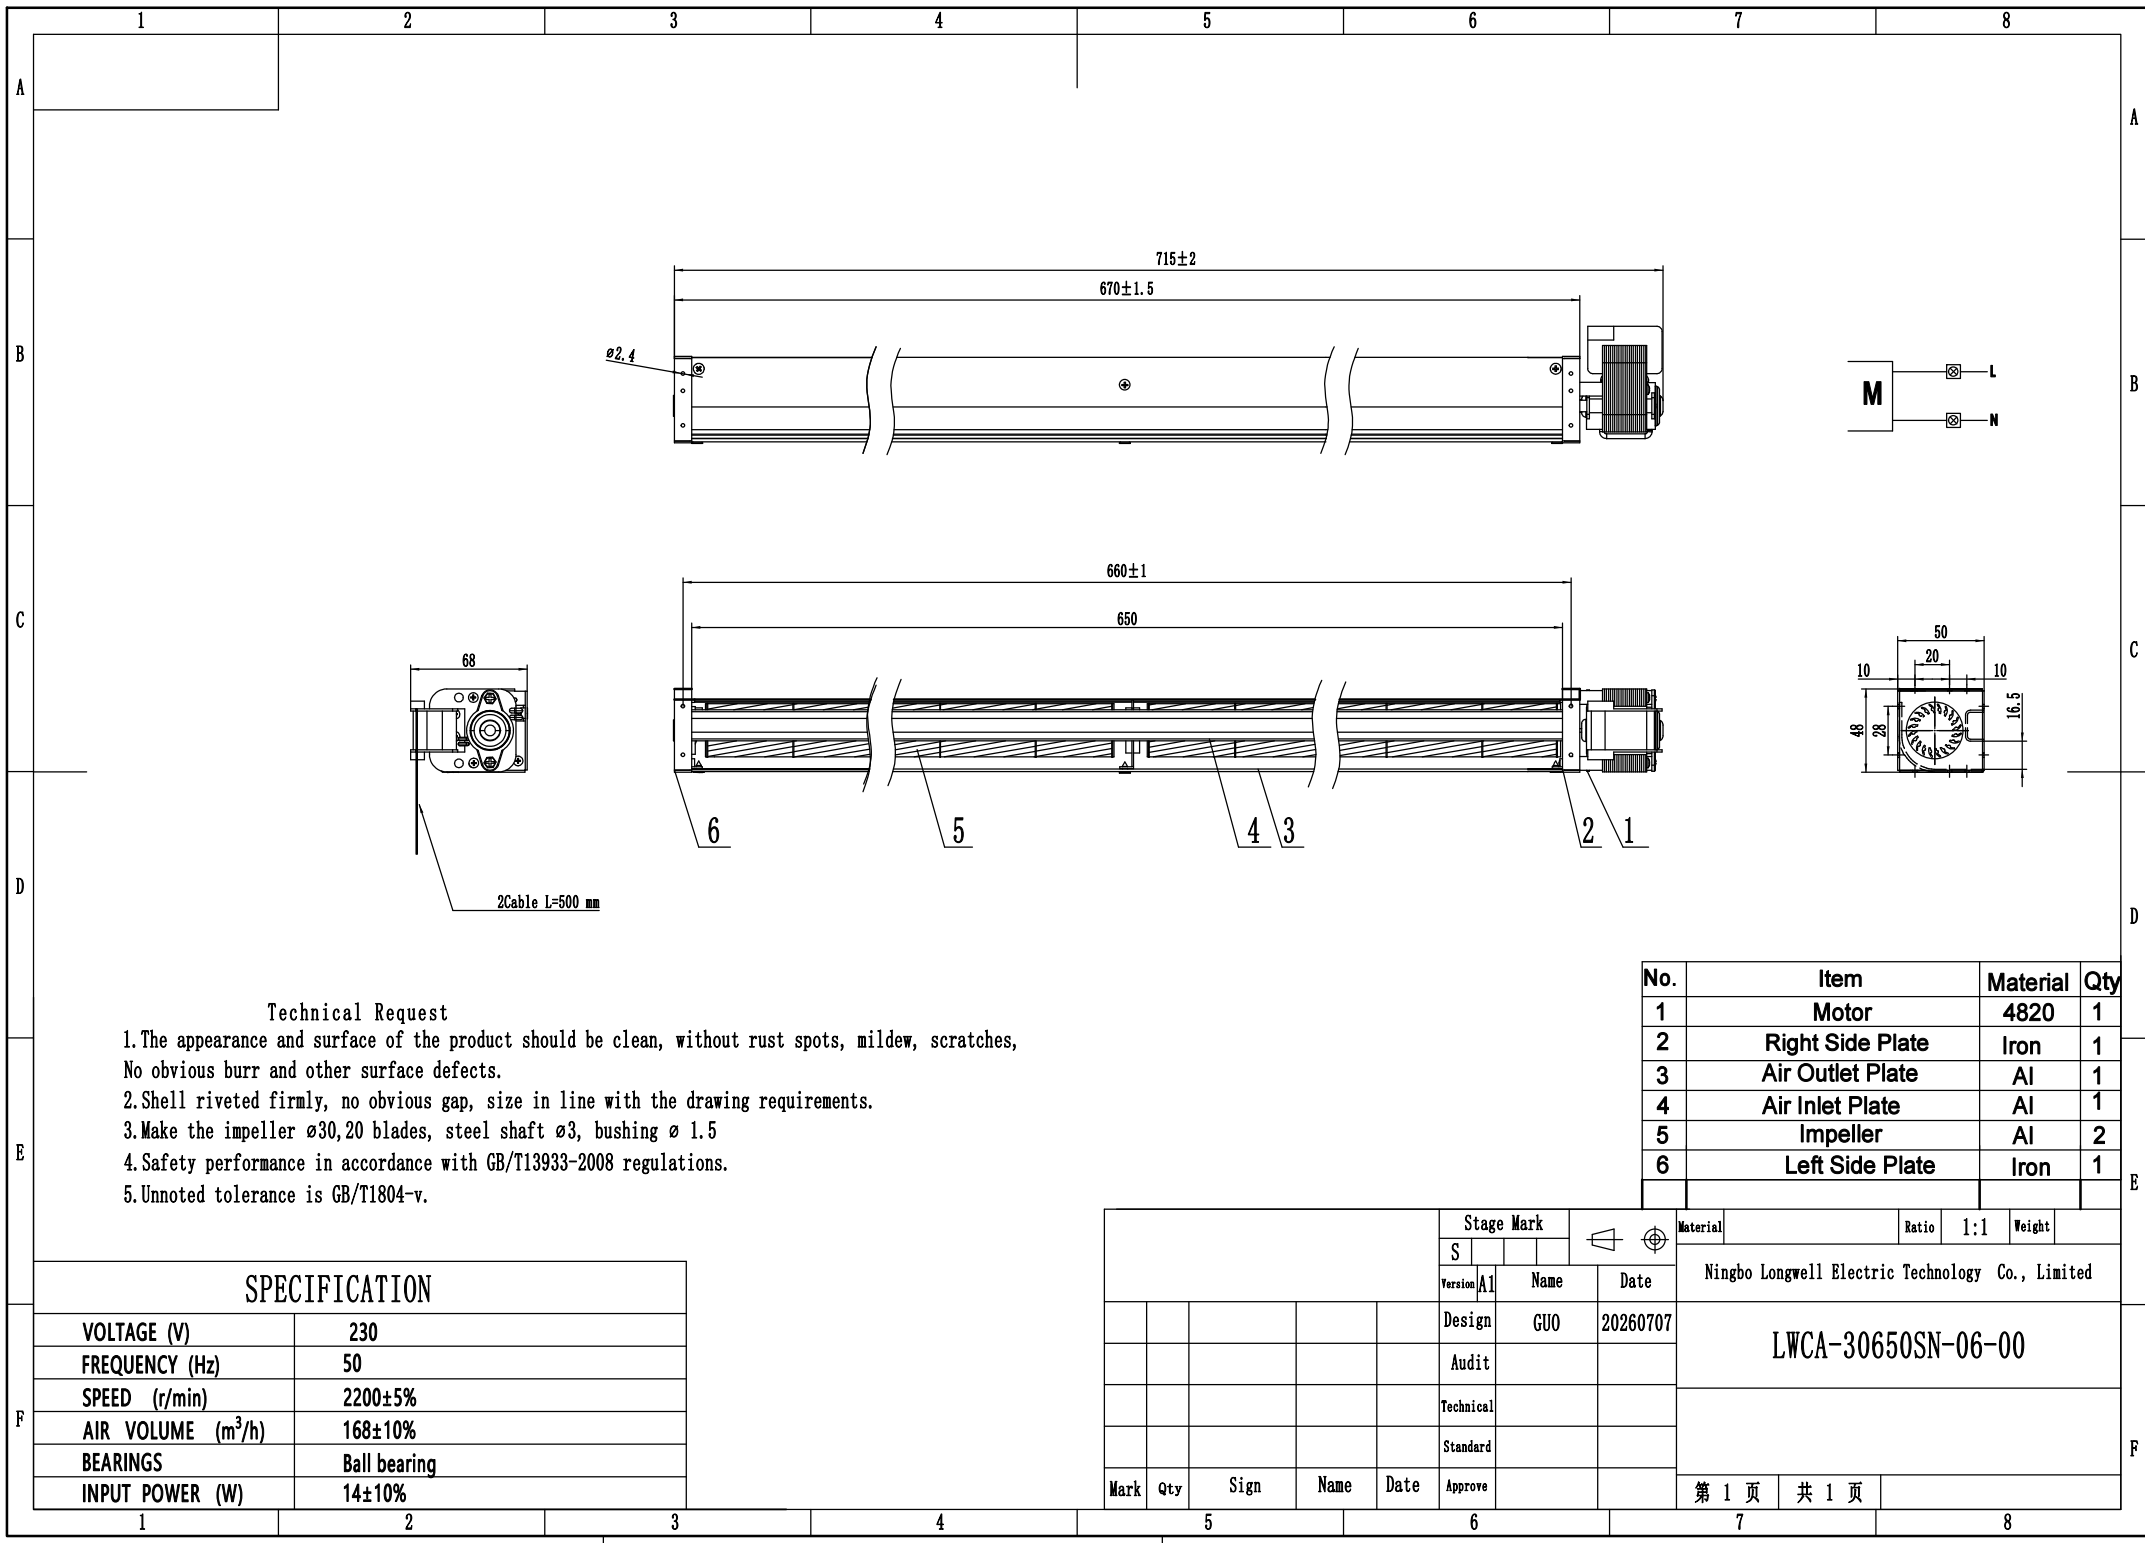

Technical Request

- 1.The appearance and surface of the product should be clean, without rust spots, mildew, scratches, No obvious burr and other surface defects.
- 2.Shell riveted firmly, no obvious gap, size in line with the drawing requirements.
- 3.Make the impeller $\varnothing 30,20$ blades, steel shaft $\varnothing 3$, bushing $\varnothing 1.5$
- 4.Safety performance in accordance with GB/T13933-2008 regulations.
- 5.Unnoted tolerance is GB/T1804-v.

SPECIFICATION

VOLTAGE (V)	230
FREQUENCY (Hz)	50
SPEED (r/min)	2200±5%
AIR VOLUME (m³/h)	168±10%
BEARINGS	Ball bearing
INPUT POWER (W)	14±10%

No.	Item	Material	Qty
1	Motor	4820	1
2	Right Side Plate	Iron	1
3	Air Outlet Plate	Al	1
4	Air Inlet Plate	Al	1
5	Impeller	Al	2
6	Left Side Plate	Iron	1

Stage Mark				Material		Ratio	1:1	Weight
S								
Version	A1	Name	Date	Ningbo Longwell Electric Technology Co., Limited				
		Design	GUO	20260707	LWCA-30650SN-06-00			
		Audit						
		Technical						
		Standard						
Mark	Qty	Sign	Name	Date	Approve			
						第 1 页	共 1 页	