


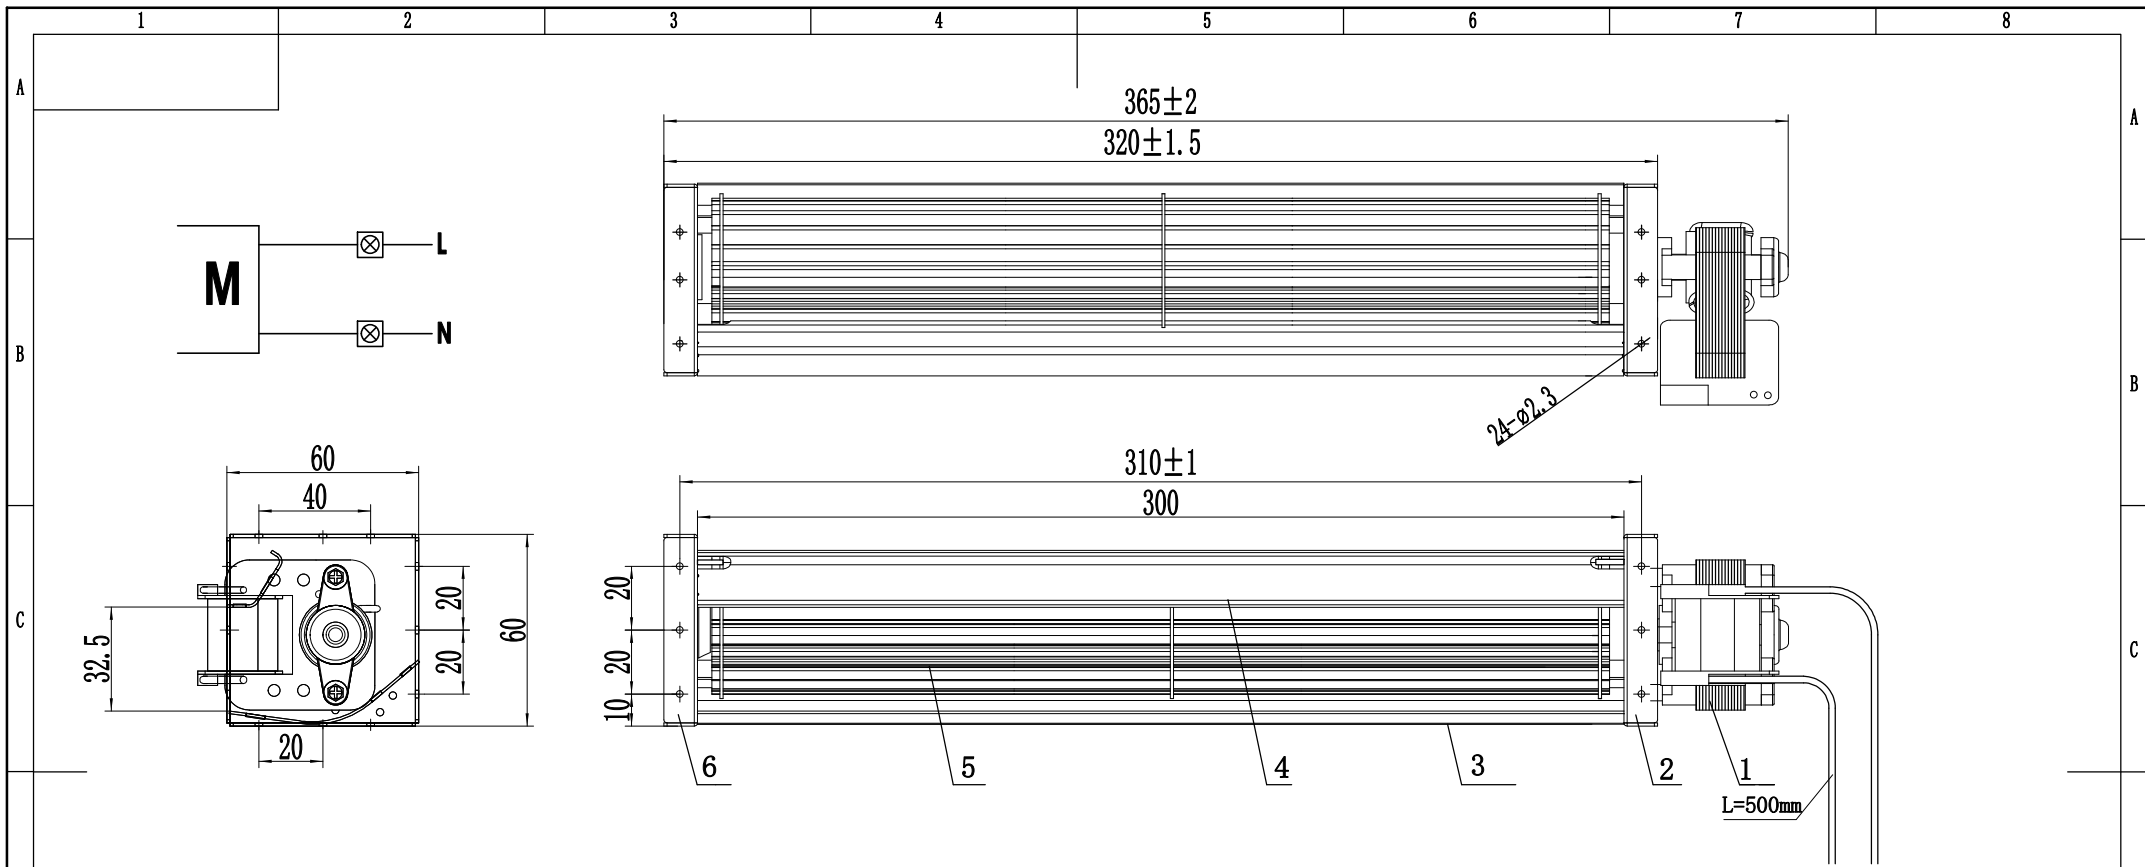

Technical Request

- 1.The appearance and surface of the product should be clean, without rust spots, mildew, scratches,
No obvious burr and other surface defects.
- 2.Shell riveted firmly, no obvious gap, size in line with the drawing requirements.
- 3.Make the impeller $\varnothing 43 \times 290$,steel shaft $\varnothing 3$, bushing $\varnothing 1.5$
- 4.Safety performance in accordance with GB/T13933-2008 regulations.
- 5.Unnoted tolerance is GB/T1804-v.

No.	Item	Material	Qty
1	Motor	4820	1
2	Right Side Plate	Iron	1
3	Air Outlet Plate	Iron	1
4	Air Inlet Plate	Iron	1
5	Impeller	Al	1
6	Left Side Plate	Iron	1

SPECIFICATION

VOLTAGE (VAC)	230
FREQUENCY (Hz)	50
SPEED (r/min)	2300±10%
AIR VOLUME (m³/h)	115
BEARINGS	Ball bearing
INPUT POWER (W)	19

					Stage Mark					Material		Ratio	1:1	Weight			
					S						Ningbo Longwell Electric Technology Co., Limited						
					Version	A1	Name			Date							
					Design	GUO		20260805	LWCA-43290SN-07-00								
					Audit												
					Technical												
					Standard												
Mark	Qty	Sign	Name	Date	Approve				第 1 页		共 1 页						