




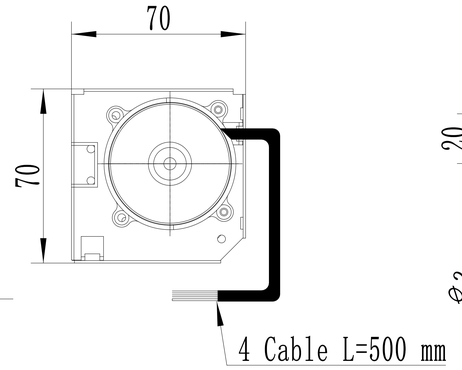

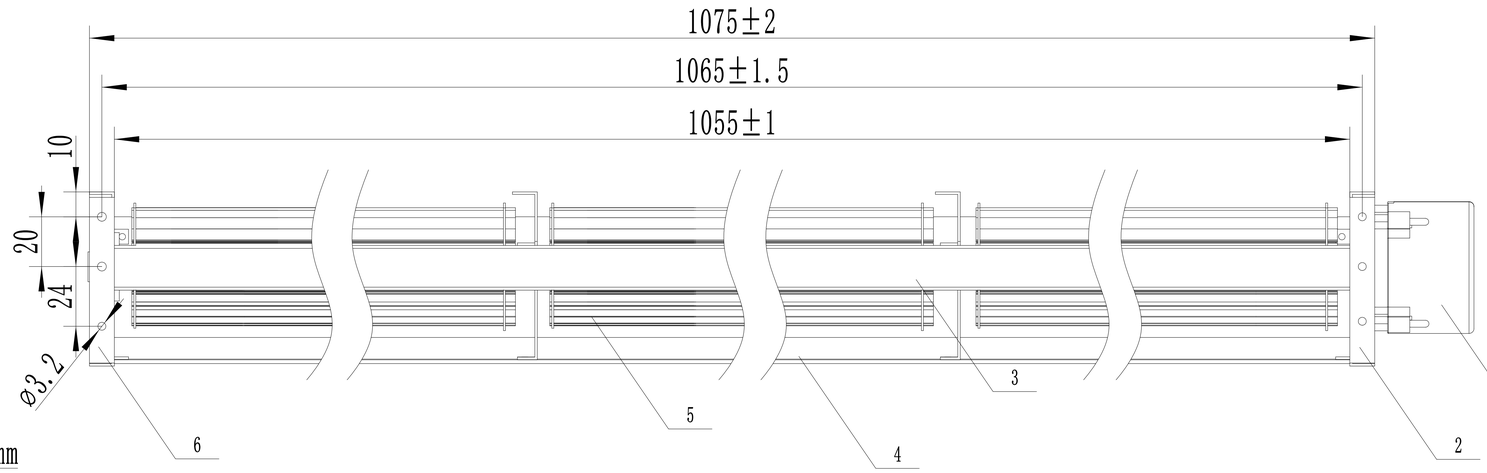

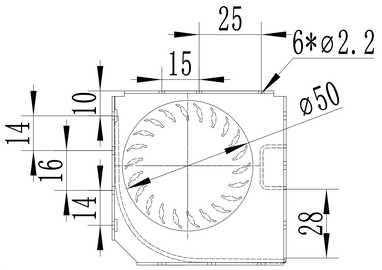

Technical Request

1. The appearance and surface of the product should be clean, without rust spots, mildew, scratches, No obvious burr and other surface defects.
2. Shell riveted firmly, no obvious gap, size in line with the drawing requirements.
3. Make the impeller ø50, steel shaft ø3, bushing ø 1.5
4. Safety performance in accordance with GB/T13933-2008 regulations.
5. Unnoted tolerance is GB/T1804-v.

SPECIFICATION

VOLTAGE (VDC)	24
CURRENT (A)	0.6±10%
SPEED (r/min)	1800±10%
AIR VOLUME (m^3/h)	574±10%
BEARINGS	Ball bearing
SPEED CPNTROL	0-10V

No.	Item	Material	Qty
1	Motor	53	1
2	Right Side Plate	Iron	1
3	Air Inlet Plate	Al	1
4	Air Outlet Plate	Al	1
5	Impeller	Al	3
6	Left Side Plate	Iron	1

Mark	Qty	Sign	Name	Date			
					Stage Mark		
					S		
					Version A0	Name	Date
					Design	GUO	20260312
					Audit		
					Technical		
					Standard		
					Approve		

Material | Ratio 1:1 | Weight

Ningbo Longwell Electric Technology Co., Limited

LWCD-501055MN-06-00

第 1 页 共 1 页