


技术参数 Technical Data

Wheel diameter	叶轮直径	D = 145 mm	Fan weight	风机质量	m = 1.01 kg
Moment of Inertia	转动惯量	J = 0.002 kg·m ²	Speed limit	极限转速	n _{max} = 1300 r/min


性能曲线 Performance Curves

Performance certified is for installation type B: free inlet, ducted outlet. Power rating (kW) does not include transmission losses. Performance ratings do not include the effects of appurtenances (accessories). The A-weighted sound ratings shown have been calculated per AMCA International Standard 301. Values shown are for inlet L_{WA} sound power levels for installation type B: free inlet, ducted outlet.



经认证的性能是B类安装: 自由入口, 管道出口。功率额定值(kW)不包括传输损失。各项性能额定值不包括附属物(附件)的影响。所示A加权声音性能额定值已按AMCA International标准301计算。所示值为安装类型B: 自由入口, 管道出口的声功率级(入口L_{WA})。

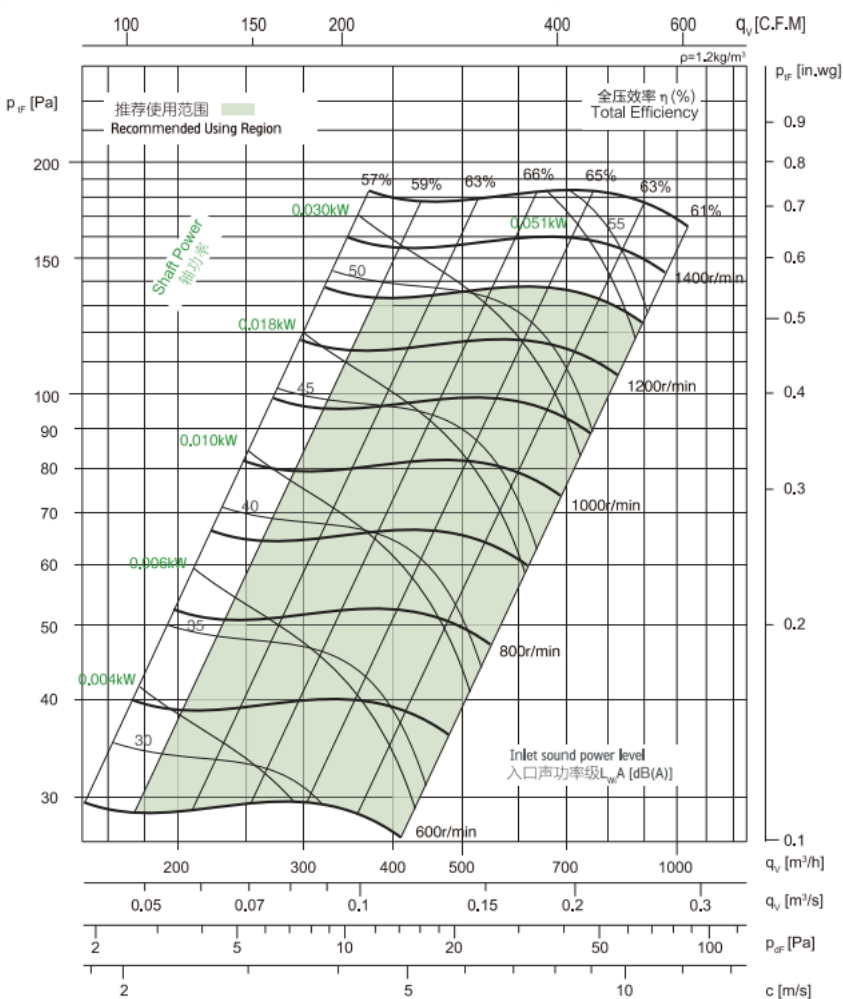

Measured in installation B according to AMCA 211:



外形尺寸 Overall Size

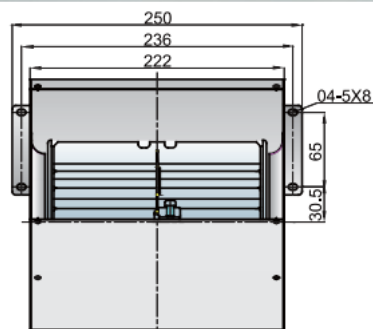


技术参数 Technical Data

Wheel diameter	叶轮直径	D = 180 mm	Fan weight	风机质量	m = 1.76 kg
Moment of inertia	转动惯量	J = 0.006 kg·m ²	Speed limit	极限转速	n _{max} = 1400 r/min


性能曲线 Performance Curves

Performance certified is for installation type B: free inlet, ducted outlet. Power rating (kW) does not include transmission losses. Performance ratings do not include the effects of appurtenances (accessories). The A-weighted sound ratings shown have been calculated per AMCA International Standard 301. Values shown are for inlet L_{WA} sound power levels for installation type B: free inlet, ducted outlet.



经认证的性能是B类安装：自由入口，管道出口。功率额定值(kW)不包括传输损失。各项性能额定值不包括附属物(附件)的影响。所示A加权声音性能额定值已按AMCA International标准301计算。所示值为安装类型B：自由入口，管道出口的声功率级(入口L_{WA})。

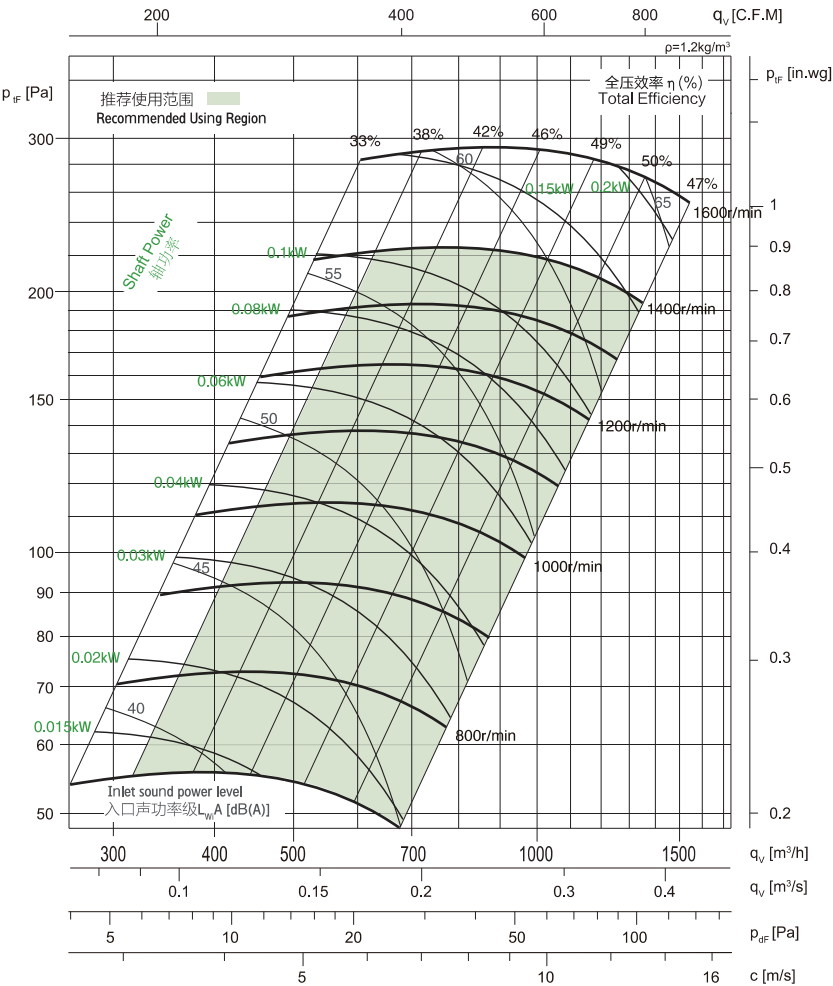

Measured in installation B according to AMCA 211:



外形尺寸 Overall Size

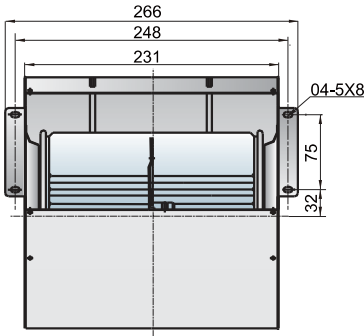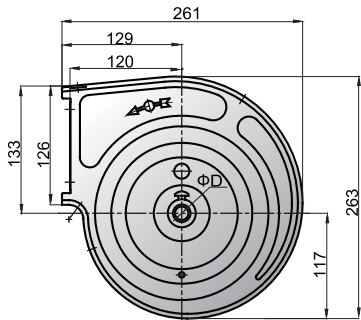

ΦD	Φ12.7	Φ15
----	-------	-----


技术参数 Technical Data

Wheel diameter	叶轮直径	D = 200 mm	Fan weight	风机质量	m = 2.4 kg
Moment of inertia	转动惯量	J = 0.01 kg·m ²	Speed limit	极限转速	n _{max} = 1400 r/min


性能曲线 Performance Curves

Performance certified is for installation type B: free inlet, ducted outlet. Power rating (kW) does not include transmission losses. Performance ratings do not include the effects of appurtenances (accessories). The A-weighted sound ratings shown have been calculated per AMCA International Standard 301. Values shown are for inlet L_{WA} sound power levels for installation type B: free inlet, ducted outlet.



经认证的性能是B类安装：自由入口，管道出口。功率额定值(kW)不包括传输损失。各项性能额定值不包括附属物(附件)的影响。所示A加权声音性能额定值已按AMCA International标准301计算。所示值为安装类型B：自由入口，管道出口的声功率级(入口L_{WA})。

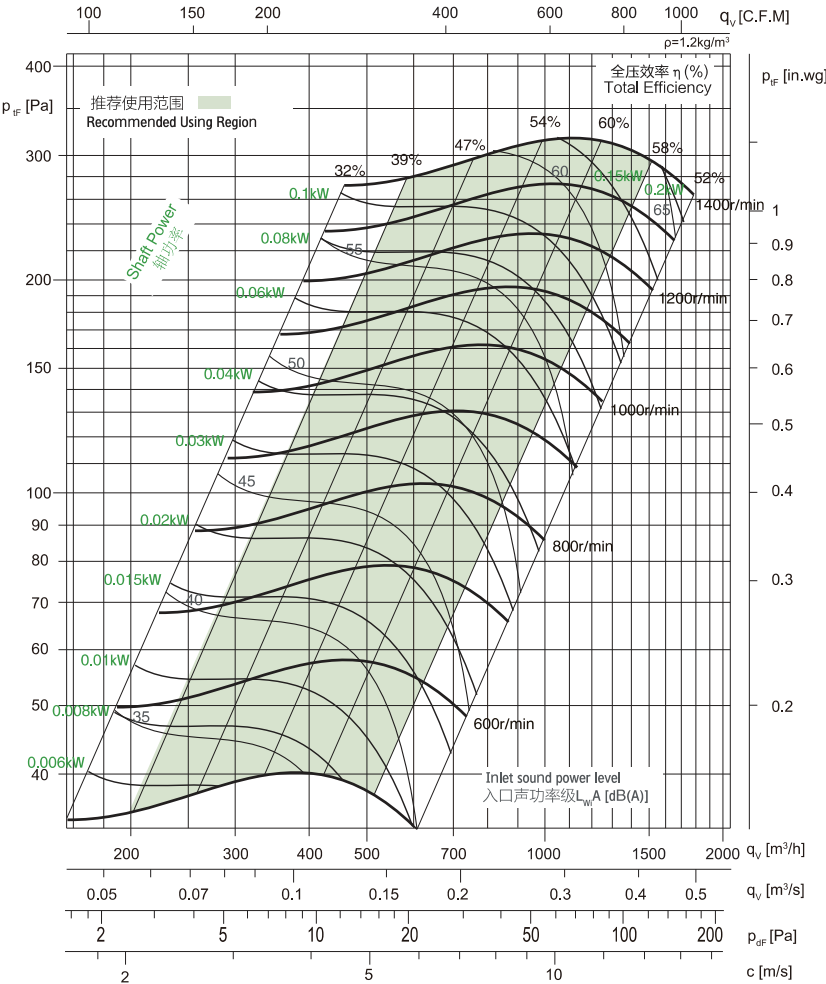

Measured in installation B according to AMCA 211:



外形尺寸 Overall Size

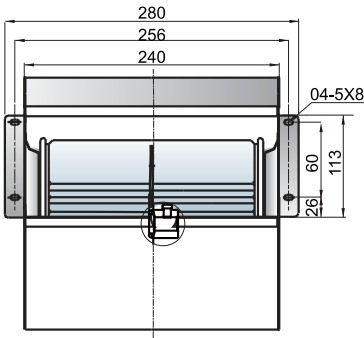

ΦD	Φ12.7	Φ15
----	-------	-----


技术参数 Technical Data

Wheel diameter	叶轮直径	D = 200 mm	Fan weight	风机质量	m = 3.49 kg
Moment of inertia	转动惯量	J = 0.01 kg·m ²	Speed limit	极限转速	n _{max} = 1400 r/min


性能曲线 Performance Curves

Performance certified is for installation type B: free inlet, ducted outlet. Power rating (kW) does not include transmission losses. Performance ratings do not include the effects of appurtenances (accessories). The A-weighted sound ratings shown have been calculated per AMCA International Standard 301. Values shown are for inlet L_{WA} sound power levels for installation type B: free inlet, ducted outlet.



经认证的性能是B类安装：自由入口，管道出口。功率额定值(kW)不包括传输损失。各项性能额定值不包括附属物(附件)的影响。所示A加权声音性能额定值已按AMCA International标准301计算。所示值为安装类型B：自由入口，管道出口的声功率级(入口L_{WA})。

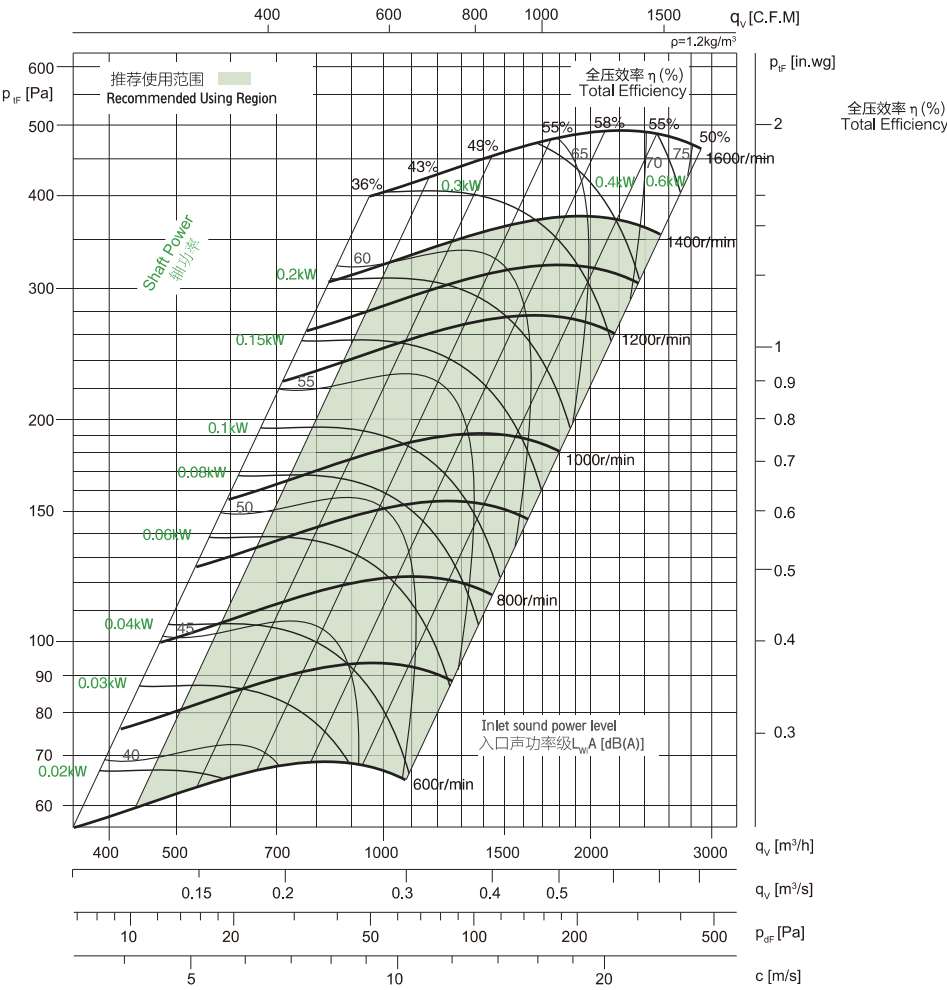

Measured in installation B according to AMCA 211:



外形尺寸 Overall Size



ΦD	Φ12.7	Φ15	Φ17
----	-------	-----	-----


技术参数 Technical Data

Wheel diameter	叶轮直径	D = 225 mm	Fan weight	风机质量	m = 3.75 kg
Moment of inertia	转动惯量	J = 0.014 kg·m ²	Speed limit	极限转速	n _{max} = 1400 r/min


性能曲线 Performance Curves

Performance certified is for installation type B: free inlet, ducted outlet. Power rating (kW) does not include transmission losses. Performance ratings do not include the effects of appurtenances (accessories). The A-weighted sound ratings shown have been calculated per AMCA International Standard 301. Values shown are for inlet L_{WA} sound power levels for installation type B: free inlet, ducted outlet.



经认证的性能是B类安装：自由入口，管道出口。功率额定值(kW)不包括传输损失。各项性能额定值不包括附属物(附件)的影响。所示A加权声音性能额定值已按AMCA International标准301计算。所示值为安装类型B：自由入口，管道出口的声功率级(入口L_{WA})。

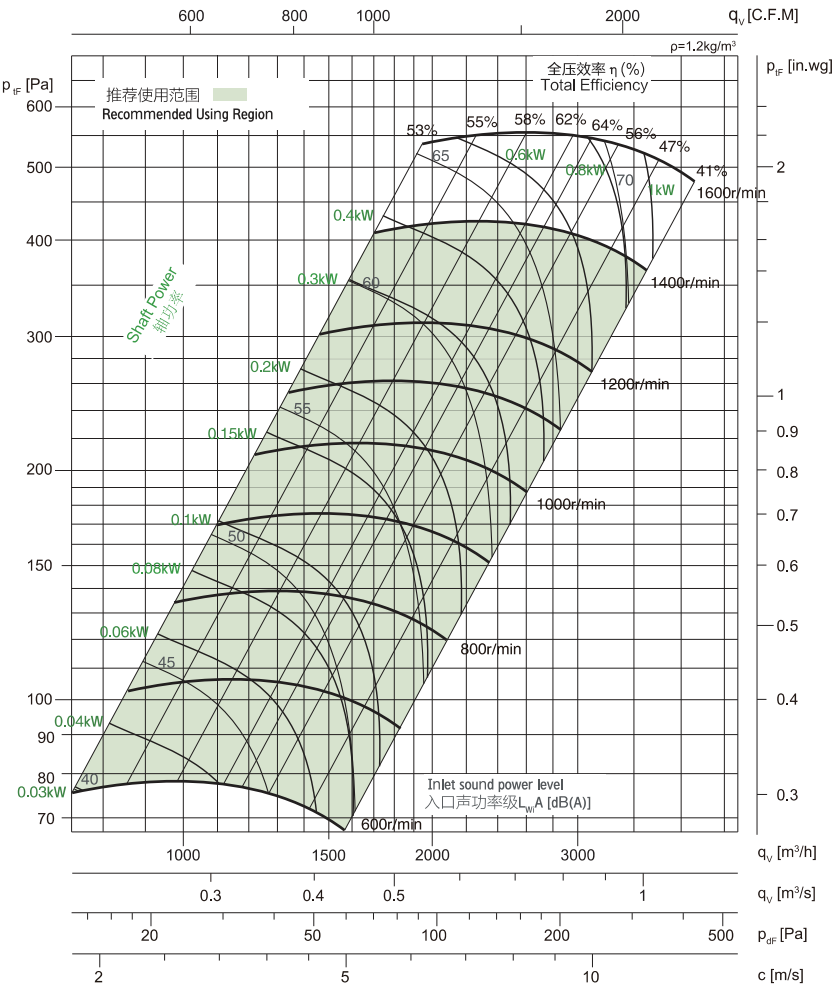

Measured in installation B according to AMCA 211:



外形尺寸 Overall Size



ΦD	Φ127	Φ15
----	------	-----