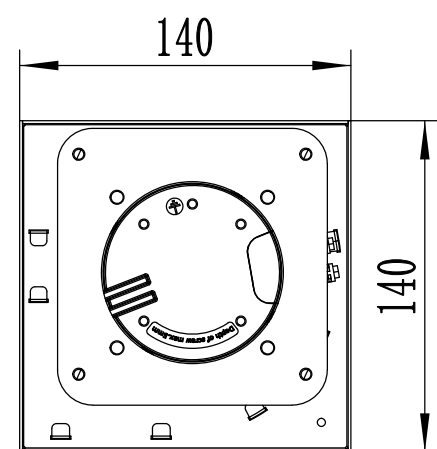


1. The appearance and surface of the product should be clean, without rust spots, mildew, scratches, No obvious burr and other surface defects.
2. Shell riveted firmly, no obvious gap, size in line with the drawing requirements.
3. Make the impeller $\varnothing 100, 45$ blades, steel shaft $\varnothing 8$, bushing $\varnothing 8$
4. Safety performance in accordance with GB/T13933-2008 regulations.
5. Unnoted tolerance is GB/T1804-v.

No.	Item	Material	Qty
1	Motor	EC92/102	1
2	Right Side Plate	SGCC	1
3	Air Outlet Plate	SGCC	1
4	Air Inlet Plate	SGCC	1
5	Impeller	Al	2
6	Left Side Plate	SGCC	1

SPECIFICATION	
VOLTAGE (V)	230
FREQUENCY (Hz)	50/60
POWER (W)	/
AIR VOLUME (m ³ /h)	/
SPEED (r/min)	1500±150
SPEED CONTROL	0-10VDC/PWM
BEARINGS	Ball bearing

					Stage Mark		 	Material		Ratio		1:1		Weight			
					S					Ningbo Longwell Electric Technology Co., Limited							
						A0											
					Design	zhang		20260814		LWCE-1001000SN-06-00							
					Audit												
					Technical												
					Standard												
Mark	Qty	Sign	Name	Date	Approve					第 1 页		共 1 页					