
LWFA-140 Serise



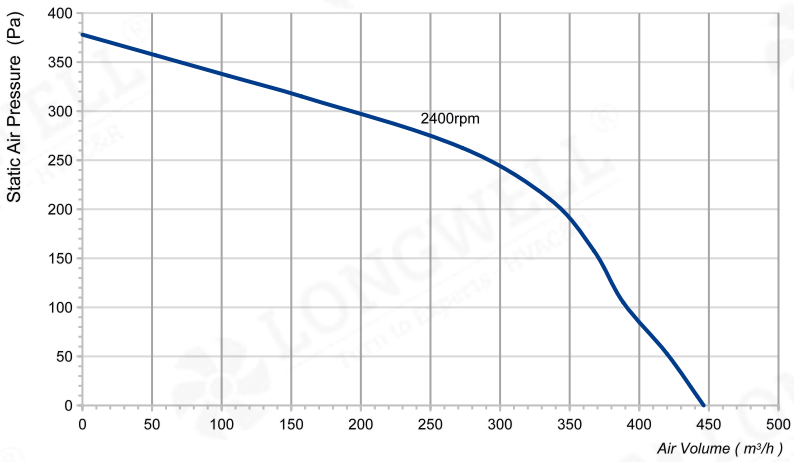


Product Characteristic


• Material:	Galvanised sheet steel	• Type of Protection:	IP54
• Bearing:	Maintenance-free ball bearings	• Insulation Class:	F
• Mode of Operation:	S1	• Operation Temperature:	-30℃～+60℃

CE RoHS ETL BSCI ISO EAC UL LVD


Technical Specifications

Model	Voltage (V)	Frequency (Hz)	Power (W)	Current (A)	Speed (RPM)	Air Flow (m³/h)	Air Pressure (Pa)	Noise [dB(A)]	Capacitor	Curve
LWFA2E140-092SS-01	230	50	148	0.67	2400	446	378	65	5uF	/

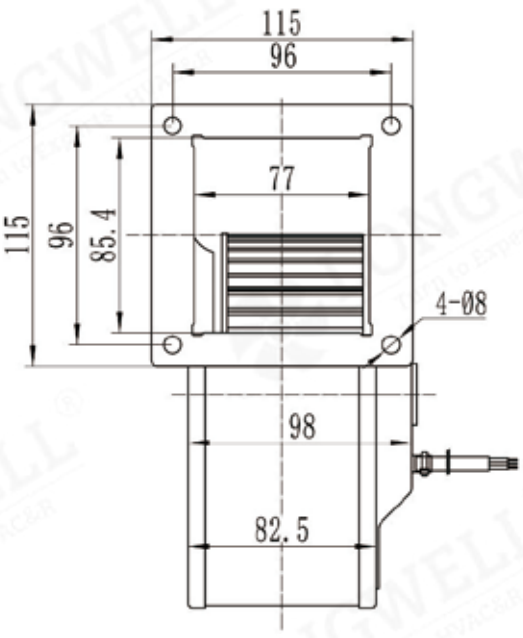

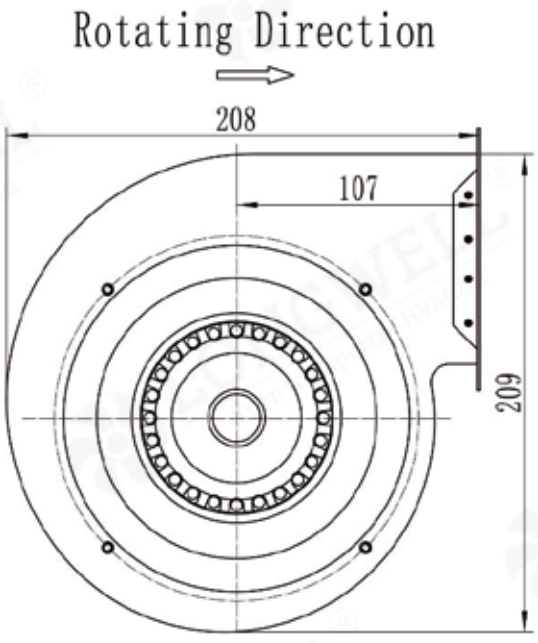

LWFA-140 Serise

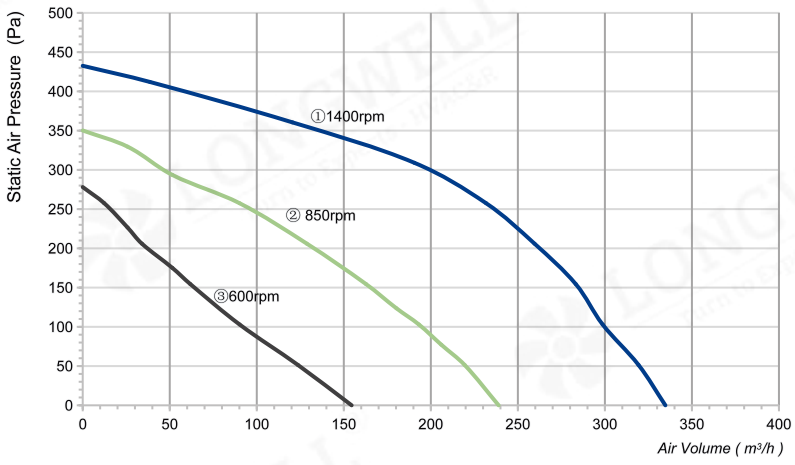



Product Characteristic

- Material: Plastic PA66
- Bearing: Maintenance-free ball bearings
- Mode of Operation: S1
- Type of Protection: IP54
- Insulation Class: F
- Operation Temperature: -30℃～+60℃

Technical Specifications

Model	Voltage (V)	Frequency (Hz)	Power (W)	Current (A)	Speed (RPM)	Air Flow (m³/h)	Air Pressure (Pa)	Noise [dB(A)]	Capacitor	Curve
LWFA2E140-092SS-02	230	50	90	0.4	1400	335	433	52	2uF	①
			60	0.3	850	239	350	40	2uF	②
			50	0.25	600	155	278	32	2uF	③

