


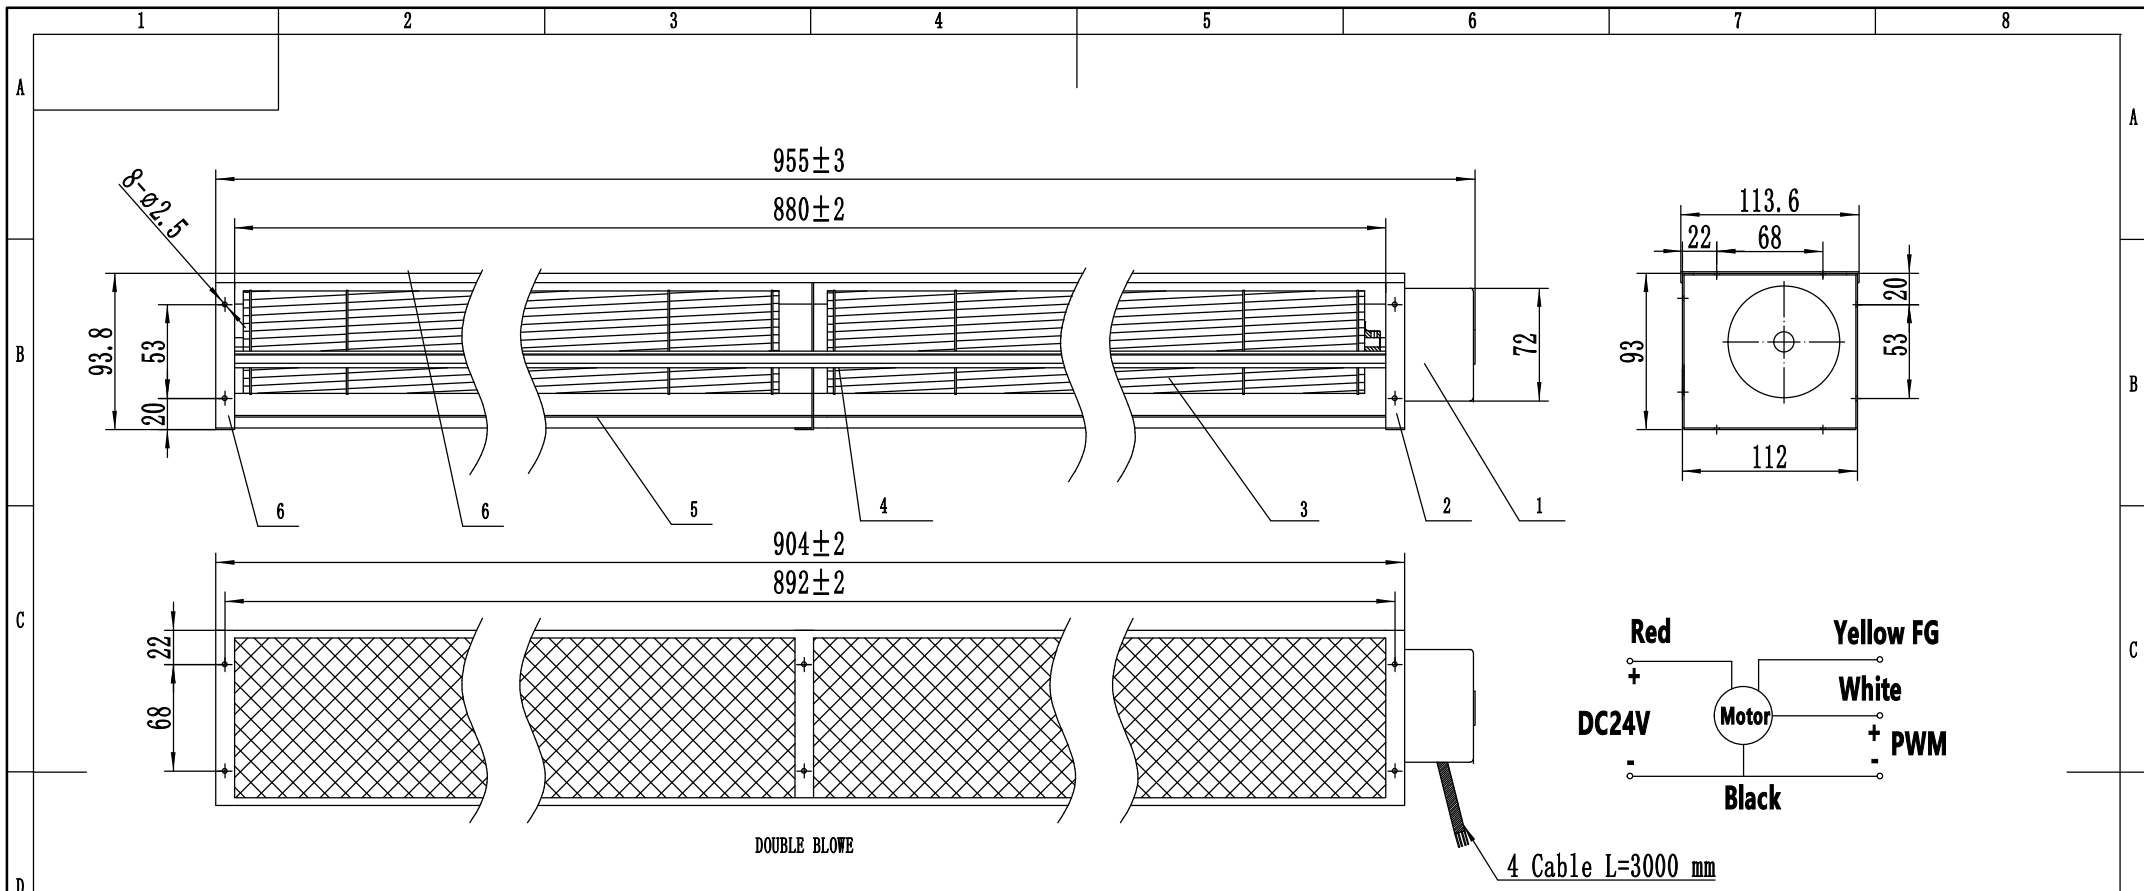

Technicel Request

- 1.The appearance and surface of the product should be clean, without rust spots, mildew, scratches, No obvious burr and other surface defects.
- 2.Shell riveted firmly, no obvious gap, size in line with the drawing requirements.
- 3.Make the impeller ø65X430, diagonal flow, 30 blades, steel shaft ø6, bushing ø 6
- 4.Safety performance in accordance with GB/T13933-2008 regulations.
- 5.Unnoted tolerance is GB/T1804-v.

No.	Item	Material	Qty
1	Motor		1
2	Right Side Plate	Iron	1
3	Air Outlet Plate	Al	1
4	Air Inlet Plate	Al	1
5	Impeller	Al	1
6	Screen	Iron	1
7	Left Side Plate	Iron	1

SPECIFICATION	
VOLTAGE (V)	24
CURRENT (A)	1.4
SPEED (r/min)	1600
AIR VOLUME (m³/h)	900
BEARINGS	Ball bearing
POWER (W)	32

Stage Mark				Material	Ratio	1:1	Weight
S				Ningbo Longwell Electric Technology Co., Limited			
Version	A1	Name	Date	LWCD-65880MN-01			
Design	JIN	2023.09.19					
Audit							
Technical							
Standard				第 1 页 共 1 页			
Mark	Qty	Sign	Name	Date	Approve		