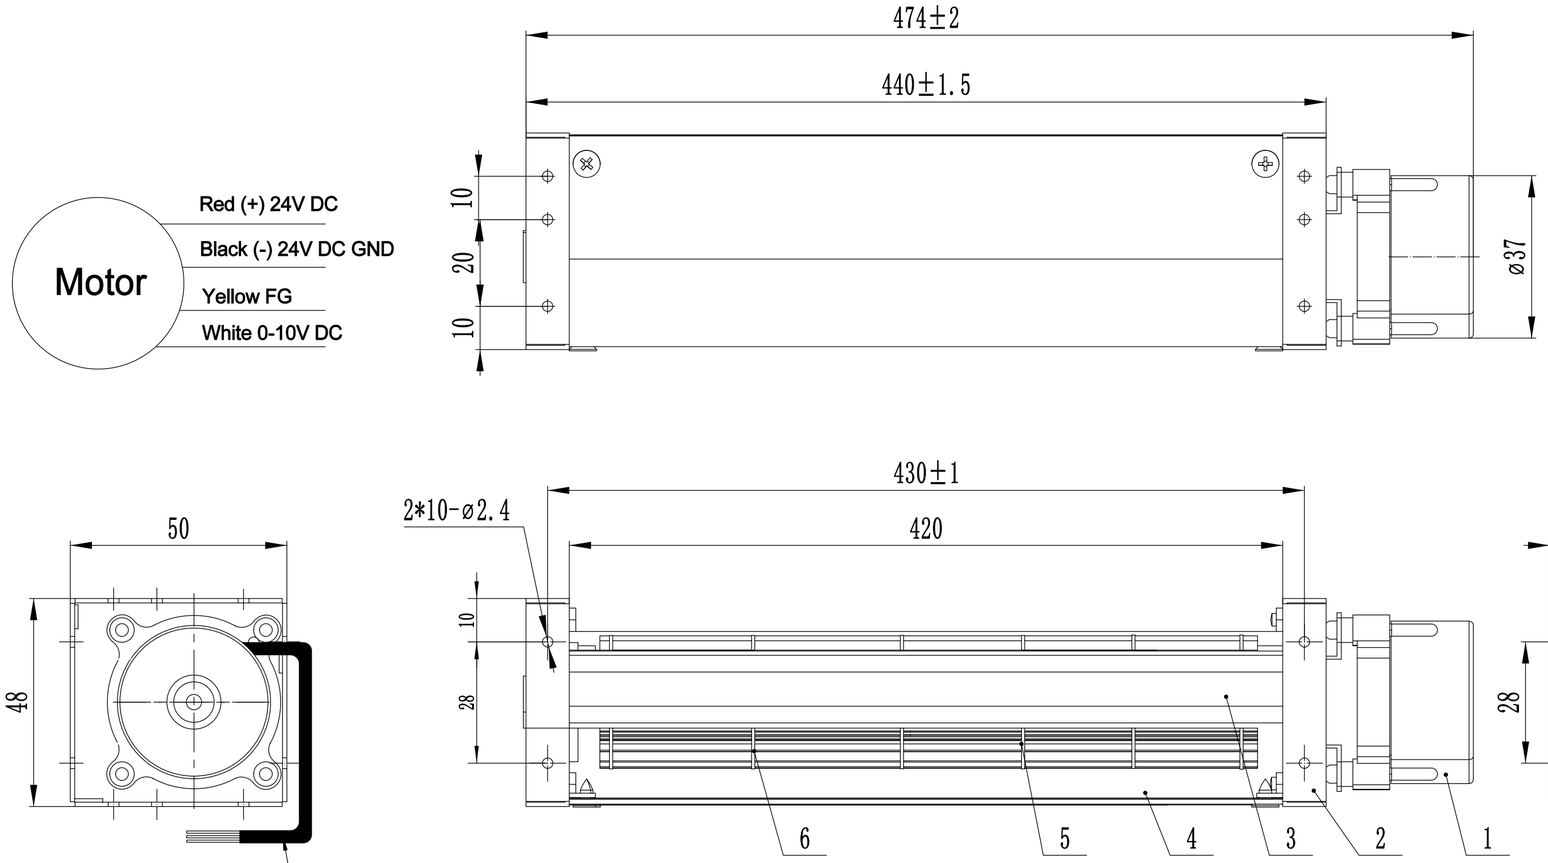


Technical Request

1. The appearance and surface of the product should be clean, without rust spots, mildew, scratches, No obvious burr and other surface defects.
2. Shell riveted firmly, no obvious gap, size in line with the drawing requirements.
3. Make the impeller ø30,20 blades, steel shaft ø3, bushing ø 1.5
4. Safety performance in accordance with GB/T13933-2008 regulations.
5. Unnoted tolerance is GB/T1804-v.

SPECIFICATION	
VOLTAGE (VDC)	12
CURRENT (A)	0.14
SPEED (r/min)	2400±10%
AIR VOLUME (m^3/h)	95
BEARINGS	Ball Bearing
Speed control	0-10V

No.	Item	Material	Qty
1	Motor	3725	1
2	Right Side Plate	Iron	1
3	Air Outlet Plate	Al	1
4	Air Inlet Plate	Al	1
5	Impeller	Al	1
6	Left Side Plate	Iron	1

Mark	Qty	Sign	Name	Date

Stage Mark		
S		
Version A1	Name	Date
Design	ZHANG	20260430
Audit		
Technical		
Standard		
Approve		

Material | Ratio 1:2 | Weight

Ningbo Longwell Electric Technology Co., Limited

LWCD-30420LN-06-00

第 1 页 共 1 页